




OIL ANALYSIS REPORT

Sample Rating Trend

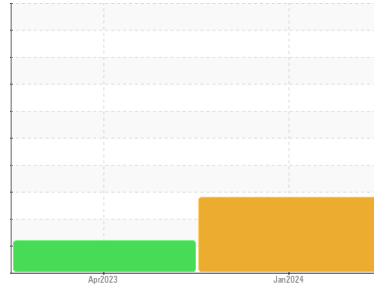

DIRT



Area
[42768583]

Machine Id
9786

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil from the component if this has not already been done. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

Wear

Aluminum ppm levels are noted. All other component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853149	WC0796559	---
Sample Date	Client Info		03 Jan 2024	08 Apr 2023	---
Machine Age	kms	Client Info	0	5078	---
Oil Age	kms	Client Info	0	0	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			ABNORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	▲ 2.5	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	66	12
Chromium	ppm	ASTM D5185(m)	>20	4	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	▲ 16	2
Lead	ppm	ASTM D5185(m)	>40	14	1
Copper	ppm	ASTM D5185(m)	>330	17	<1
Tin	ppm	ASTM D5185(m)	>15	5	<1
Antimony	ppm	ASTM D5185(m)		0	0
Vanadium	ppm	ASTM D5185(m)		0	0
Beryllium	ppm	ASTM D5185(m)		0	0
Cadmium	ppm	ASTM D5185(m)		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	33	71
Barium	ppm	ASTM D5185(m)	10	4	0
Molybdenum	ppm	ASTM D5185(m)	100	62	11
Manganese	ppm	ASTM D5185(m)		5	<1
Magnesium	ppm	ASTM D5185(m)	450	423	707
Calcium	ppm	ASTM D5185(m)	3000	1675	1389
Phosphorus	ppm	ASTM D5185(m)	1150	915	728
Zinc	ppm	ASTM D5185(m)	1350	1106	757
Sulfur	ppm	ASTM D5185(m)	4250	2516	2477
Lithium	ppm	ASTM D5185(m)		<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	▲ 33	4
Sodium	ppm	ASTM D5185(m)	>158	5	2
Potassium	ppm	ASTM D5185(m)	>20	40	4


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.3	0.1
Nitration	Abs/cm	ASTM D7624*	>20	14.2	9.6
Sulfation	Abs.1mm	ASTM D7415*	>30	31.5	20.3



OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

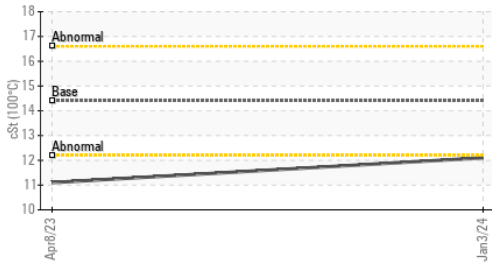

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*	36.5	15.8	---

VISUAL


method	limit/base	current	history1	history2
Emulsified Water	scalar Visual*	NEG	NEG	---
Free Water	scalar Visual*	NEG	NEG	---

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	▲ 12.1	▲ 11.1	---

GRAPHS


▲ Silicon (ppm)

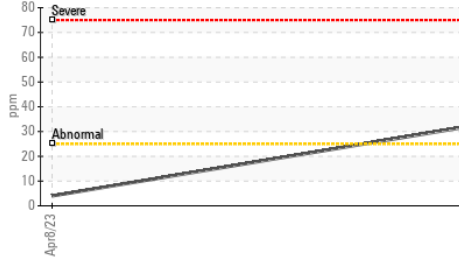


Iron (ppm)

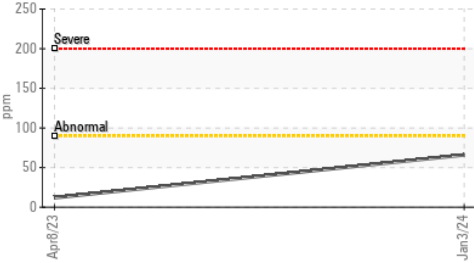


Lead (ppm)

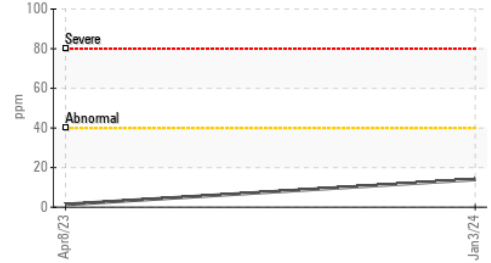


▲ Aluminum (ppm)

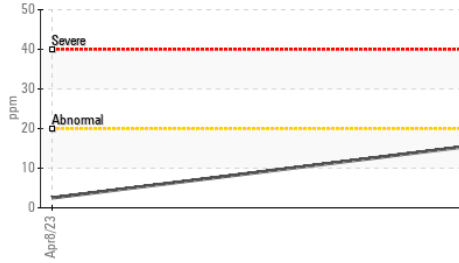


▲ Aluminum (ppm)

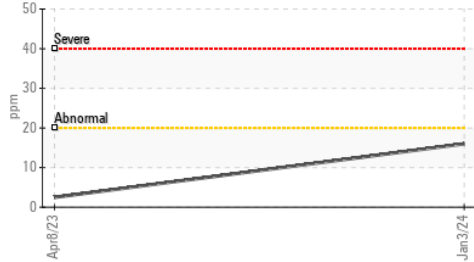


Chromium (ppm)

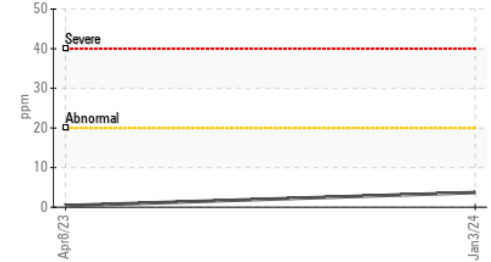


Copper (ppm)

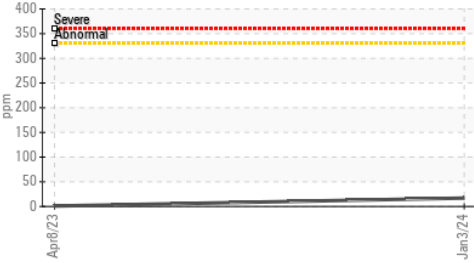


▲ Silicon (ppm)

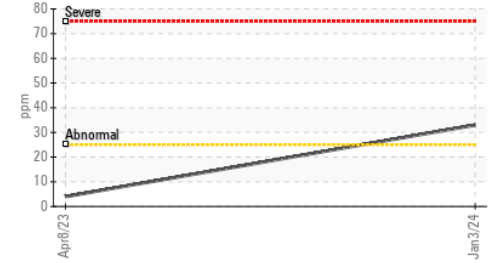

▲ Viscosity @ 100°C

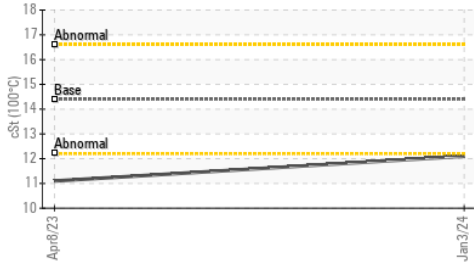

Soot %

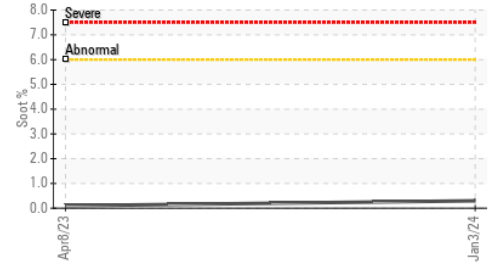

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853149 **Received** : 09 Jan 2024
Lab Number : 02607467 **Diagnosed** : 09 Jan 2024
Unique Number : 5708553 **Diagnostician** : Kevin Marson
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.