




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

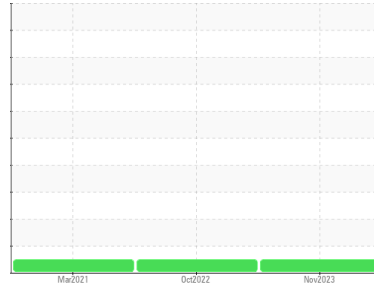

Area
[42009113]
 Machine Id
1375M

Component
Diesel Engine
 Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0853093	WC0737739	WC0549946
Sample Date	Client Info	01 Nov 2023	22 Oct 2022	20 Mar 2021
Machine Age	kms Client Info	203683	179977	118116
Oil Age	kms Client Info	0	0	0
Oil Changed	Client Info	N/A	Not Changd	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >130	24	12	78
Chromium	ppm ASTM D5185(m) >10	<1	0	1
Nickel	ppm ASTM D5185(m) >4	<1	0	<1
Titanium	ppm ASTM D5185(m) >2	0	<1	<1
Silver	ppm ASTM D5185(m) >2	0	0	0
Aluminum	ppm ASTM D5185(m) >20	9	7	23
Lead	ppm ASTM D5185(m) >20	0	<1	<1
Copper	ppm ASTM D5185(m) >125	4	<1	11
Tin	ppm ASTM D5185(m) >4	0	0	<1
Antimony	ppm ASTM D5185(m)	0	<1	0
Vanadium	ppm ASTM D5185(m)	0	0	<1
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 250	76	66	38
Barium	ppm ASTM D5185(m) 10	0	0	<1
Molybdenum	ppm ASTM D5185(m) 100	10	79	3
Manganese	ppm ASTM D5185(m)	0	<1	1
Magnesium	ppm ASTM D5185(m) 450	640	111	649
Calcium	ppm ASTM D5185(m) 3000	1375	2140	1418
Phosphorus	ppm ASTM D5185(m) 1150	704	1100	693
Zinc	ppm ASTM D5185(m) 1350	779	1157	826
Sulfur	ppm ASTM D5185(m) 4250	2604	3288	2584
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	5	6	13
Sodium	ppm ASTM D5185(m)	3	3	4
Potassium	ppm ASTM D5185(m) >20	3	<1	6

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >6	0.1	0	0.3
Nitration	Abs/cm ASTM D7624* >20	9.7	9.0	11.2
Sulfation	Abs./1mm ASTM D7415* >30	19.6	20.0	22.6



OIL ANALYSIS REPORT








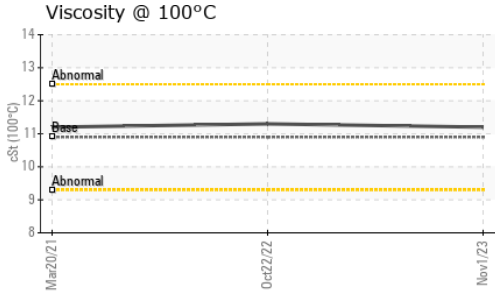


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.7	15.8	17.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.2	11.3	11.2

GRAPHS

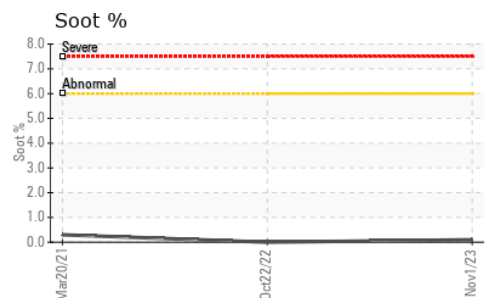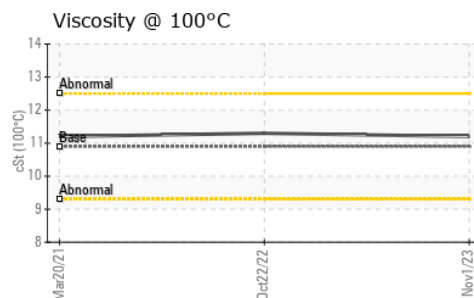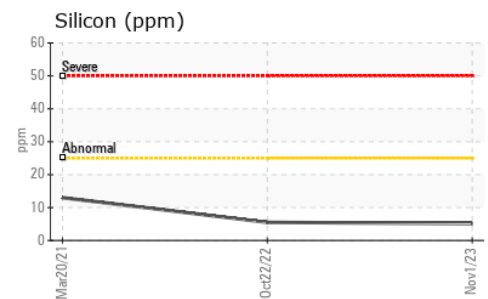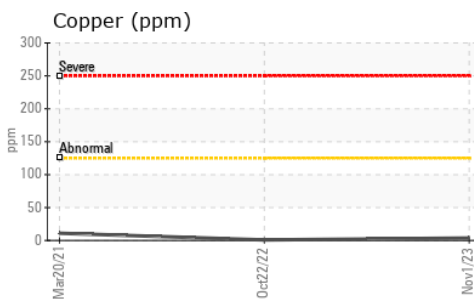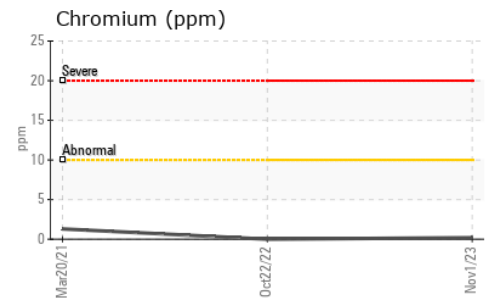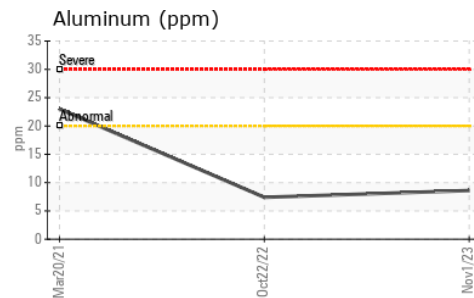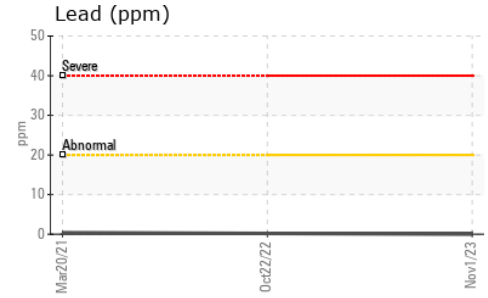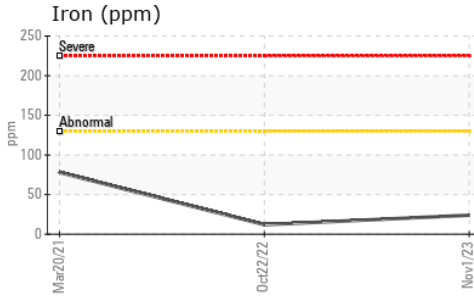

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853093 **Received** : 09 Jan 2024
Lab Number : **02607475** **Diagnosed** : 09 Jan 2024
Unique Number : 5708561 **Diagnostician** : Wes Davis
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.