



# OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION



Machine Id  
**PORSCHE 2014 PORSCHE CAYENNE**  
 Component  
**Gasoline Engine**  
 Fluid  
**SAE 5W40 (--- LTR)**

## DIAGNOSIS

**Recommendation**  
 We advise that you check for faulty combustion and a possible overheat condition. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

**Fluid Condition**  
 A small degree of oil oxidation was indicated. Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The oil is no longer serviceable.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>WC0838807</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>06 Jan 2024</b> | ---      | ---      |
| Machine Age   | kms         | Client Info | <b>138123</b>      | ---      | ---      |
| Oil Age       | kms         | Client Info | <b>6000</b>        | ---      | ---      |
| Oil Changed   | Client Info |             | <b>N/A</b>         | ---      | ---      |
| Sample Status |             |             | <b>ABNORMAL</b>    | ---      | ---      |

## CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water  | WC Method | >0.2       | <b>NEG</b> | ---      | ---      |
| Glycol | WC Method |            | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|           | method | limit/base         | current      | history1 | history2 |
|-----------|--------|--------------------|--------------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >150 | <b>8</b>     | ---      | ---      |
| Chromium  | ppm    | ASTM D5185(m) >20  | <b>0</b>     | ---      | ---      |
| Nickel    | ppm    | ASTM D5185(m) >5   | <b>&lt;1</b> | ---      | ---      |
| Titanium  | ppm    | ASTM D5185(m)      | <b>0</b>     | ---      | ---      |
| Silver    | ppm    | ASTM D5185(m) >2   | <b>0</b>     | ---      | ---      |
| Aluminum  | ppm    | ASTM D5185(m) >40  | <b>10</b>    | ---      | ---      |
| Lead      | ppm    | ASTM D5185(m) >50  | <b>0</b>     | ---      | ---      |
| Copper    | ppm    | ASTM D5185(m) >155 | <b>2</b>     | ---      | ---      |
| Tin       | ppm    | ASTM D5185(m) >10  | <b>0</b>     | ---      | ---      |
| Antimony  | ppm    | ASTM D5185(m)      | <b>0</b>     | ---      | ---      |
| Vanadium  | ppm    | ASTM D5185(m)      | <b>0</b>     | ---      | ---      |
| Beryllium | ppm    | ASTM D5185(m)      | <b>0</b>     | ---      | ---      |
| Cadmium   | ppm    | ASTM D5185(m)      | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base    | current      | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) | <b>196</b>   | ---      | ---      |
| Barium     | ppm    | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185(m) | <b>56</b>    | ---      | ---      |
| Manganese  | ppm    | ASTM D5185(m) | <b>0</b>     | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185(m) | <b>7</b>     | ---      | ---      |
| Calcium    | ppm    | ASTM D5185(m) | <b>1445</b>  | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185(m) | <b>613</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185(m) | <b>685</b>   | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185(m) | <b>1538</b>  | ---      | ---      |
| Lithium    | ppm    | ASTM D5185(m) | <b>&lt;1</b> | ---      | ---      |

## CONTAMINANTS


|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >30 | <b>8</b>     | ---      | ---      |
| Sodium    | ppm    | ASTM D5185(m)     | <b>14</b>    | ---      | ---      |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | ---      | ---      |
| Fuel      | %      | ASTM D7593* >4.0  | <b>▲ 6.6</b> | ---      | ---      |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | ASTM D7844*     | <b>0</b>    | ---      | ---      |
| Nitration | Abs/cm   | ASTM D7624* >20 | <b>11.8</b> | ---      | ---      |
| Sulfation | Abs./1mm | ASTM D7415* >30 | <b>30.9</b> | ---      | ---      |



# OIL ANALYSIS REPORT









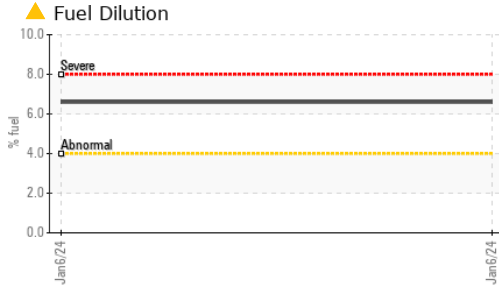


| FLUID DEGRADATION |          | method      | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|---------|----------|----------|
| Oxidation         | Abs./1mm | ASTM D7414* | >25        | ▲ 33.1  | ---      | ---      |

| VISUAL           |        | method  | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|---------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2       | NEG     | ---      | ---      |
| Free Water       | scalar | Visual* |            | NEG     | ---      | ---      |

| FLUID PROPERTIES |     | method        | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt | ASTM D7279(m) |            | 9.7     | ---      | ---      |

## GRAPHS

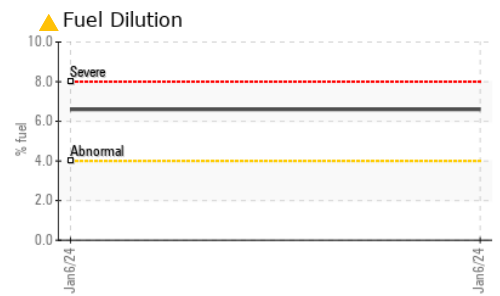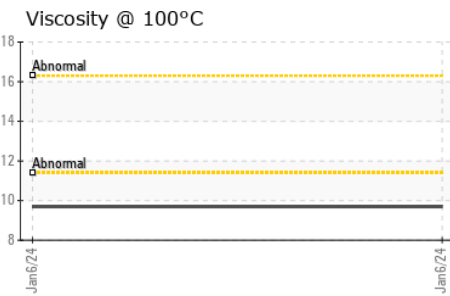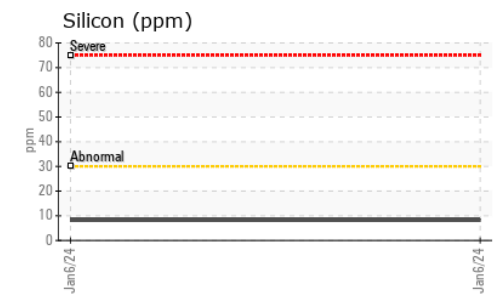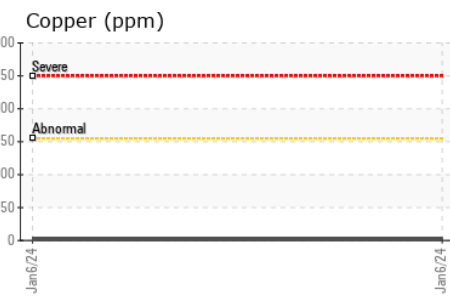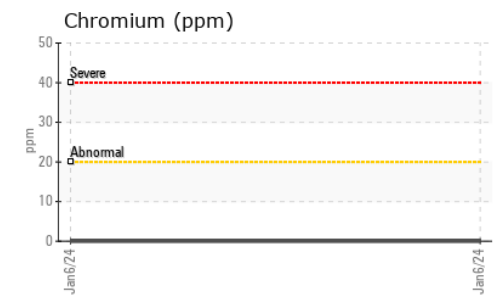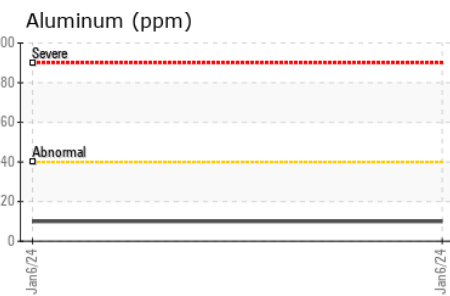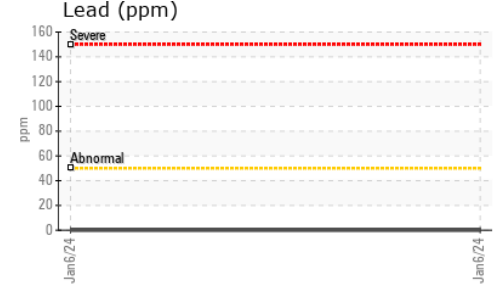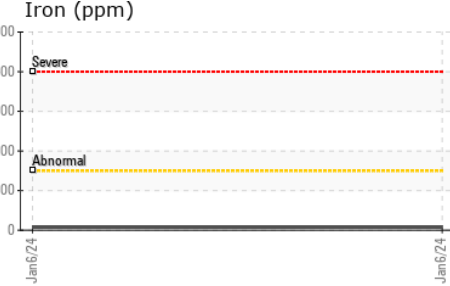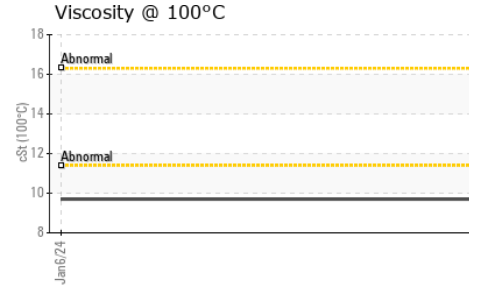

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0838807 **Received** : 09 Jan 2024  
**Lab Number** : 02607483 **Diagnosed** : 10 Jan 2024  
**Unique Number** : 5708569 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**Thomas Solutions**  
 70 Beach Road  
 Hamilton, ON  
 CA L7L 8K3  
 Contact: ELVIN B.

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: (905)545-8910  
 F: (905)549-9016