




OIL ANALYSIS REPORT

Sample Rating Trend

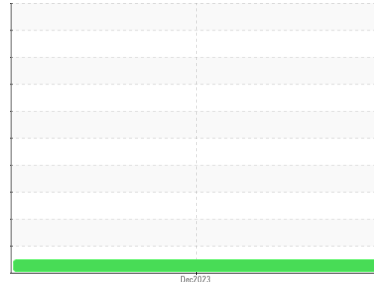

NORMAL



Machine Id
80305112

Component
Diesel Engine

Fluid
APRIL SUPERFLO GOLD K 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		CU0020545	---	---
Sample Date	Client Info		23 Dec 2023	---	---
Machine Age	kms	Client Info	531648	---	---
Oil Age	kms	Client Info	51817	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	22	---
Chromium	ppm	ASTM D5185(m)	>20	1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---
Titanium	ppm	ASTM D5185(m)	>2	0	---
Silver	ppm	ASTM D5185(m)	>2	0	---
Aluminum	ppm	ASTM D5185(m)	>20	6	---
Lead	ppm	ASTM D5185(m)	>40	3	---
Copper	ppm	ASTM D5185(m)	>330	<1	---
Tin	ppm	ASTM D5185(m)	>15	<1	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	5	---
Barium	ppm	ASTM D5185(m)	0	0	---
Molybdenum	ppm	ASTM D5185(m)	70	60	---
Manganese	ppm	ASTM D5185(m)		0	---
Magnesium	ppm	ASTM D5185(m)	1000	938	---
Calcium	ppm	ASTM D5185(m)	1050	1100	---
Phosphorus	ppm	ASTM D5185(m)	1150	983	---
Zinc	ppm	ASTM D5185(m)	1270	1200	---
Sulfur	ppm	ASTM D5185(m)	3000	2536	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	---
Sodium	ppm	ASTM D5185(m)		2	---
Potassium	ppm	ASTM D5185(m)	>20	8	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.4	---
Nitration	Abs/cm	ASTM D7624*	>20	10.3	---
Sulfation	Abs./1mm	ASTM D7415*	>30	21.7	---



OIL ANALYSIS REPORT

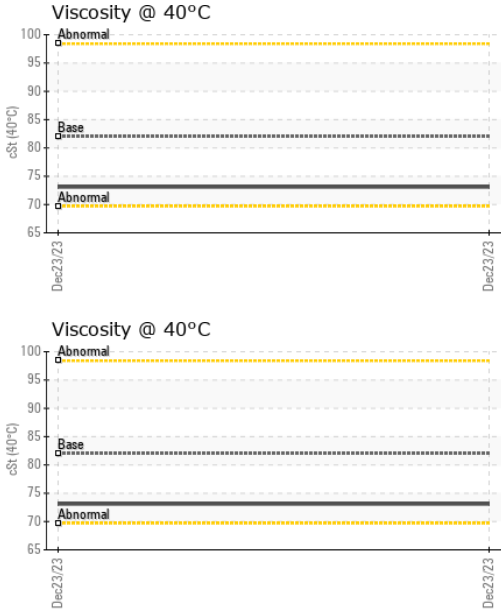


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	16.6	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	82.0	73.1	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.3	11.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	146	140	---	---

GRAPHS

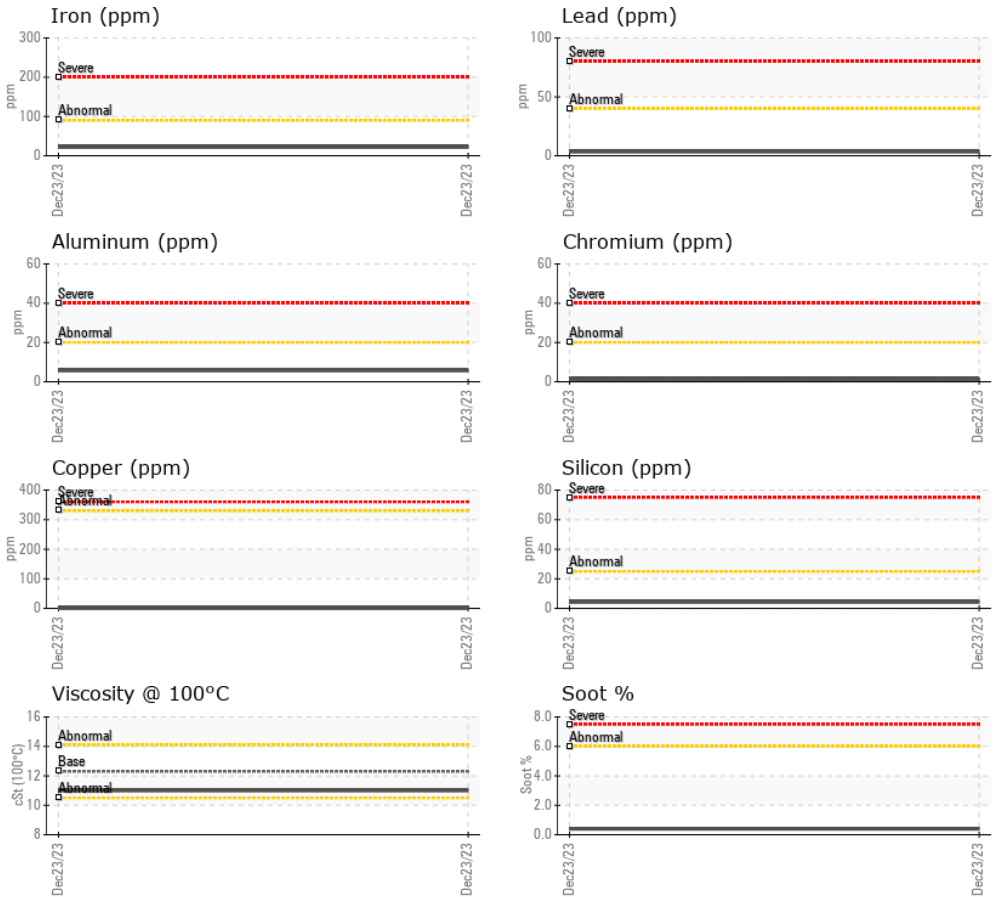

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0020545 **Received** : 10 Jan 2024
Lab Number : **02607758** **Diagnosed** : 10 Jan 2024
Unique Number : 5708844 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

LABBE EXPRESS
 1023 RUE DE VERSANT
 SAINT-RENE, QC
 CA G0M 1Z0
 Contact: Service Manager
 MICSPORT4@HOTMAIL.CPM

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: