



Machine Id
PONSSE 260185

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)



DIAGNOSIS

Recommendation

Nous recommandons le remplacement des filtres de ce composant. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une quantité modérée de particules (de 4 à 14 microns) dans l'huile. La teneur en eau est négligeable.

Fluid Condition

l'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	ST43435	---	---
Sample Date	Client Info	04 Jan 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>20	12	---	---
Chromium ppm ASTM D5185(m)	>20	<1	---	---
Nickel ppm ASTM D5185(m)	>20	0	---	---
Titanium ppm ASTM D5185(m)		0	---	---
Silver ppm ASTM D5185(m)		0	---	---
Aluminum ppm ASTM D5185(m)	>20	<1	---	---
Lead ppm ASTM D5185(m)	>20	<1	---	---
Copper ppm ASTM D5185(m)	>20	3	---	---
Tin ppm ASTM D5185(m)	>20	0	---	---
Antimony ppm ASTM D5185(m)		0	---	---
Vanadium ppm ASTM D5185(m)		0	---	---
Beryllium ppm ASTM D5185(m)		0	---	---
Cadmium ppm ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)	5	4	---	---
Barium ppm ASTM D5185(m)	5	0	---	---
Molybdenum ppm ASTM D5185(m)	5	2	---	---
Manganese ppm ASTM D5185(m)		0	---	---
Magnesium ppm ASTM D5185(m)	25	29	---	---
Calcium ppm ASTM D5185(m)	200	105	---	---
Phosphorus ppm ASTM D5185(m)	300	344	---	---
Zinc ppm ASTM D5185(m)	370	415	---	---
Sulfur ppm ASTM D5185(m)	2500	1845	---	---
Lithium ppm ASTM D5185(m)		<1	---	---





CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>15	4	---	---
Sodium ppm ASTM D5185(m)		<1	---	---
Potassium ppm ASTM D5185(m)	>20	<1	---	---
Water % ASTM D6304*	>0.05	0.005	---	---
ppm Water ppm ASTM D6304*	>500	52	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	▲ 15549	---	---
Particles >6µm ASTM D7647	>1300	830	---	---
Particles >14µm ASTM D7647	>160	15	---	---
Particles >21µm ASTM D7647	>40	3	---	---
Particles >38µm ASTM D7647	>10	1	---	---
Particles >71µm ASTM D7647	>3	1	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	▲ 21/17/11	---	---

OIL ANALYSIS REPORT

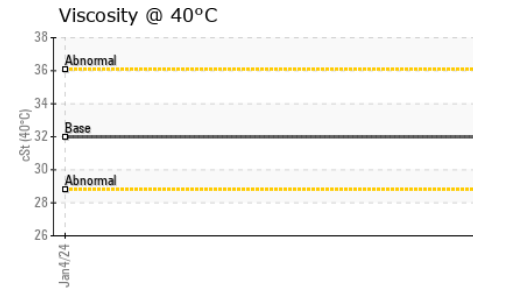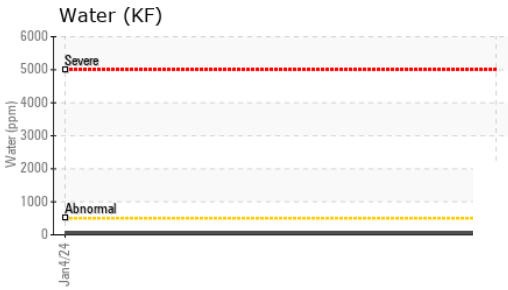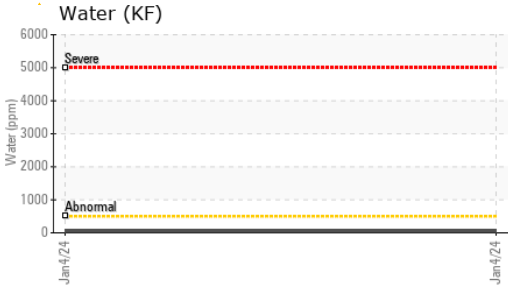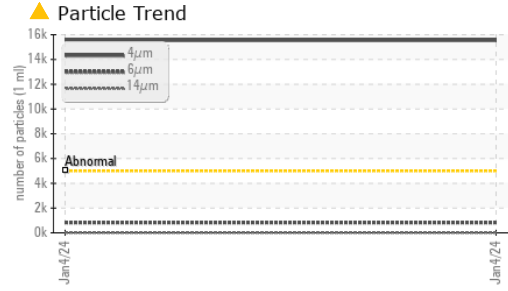





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	32.0	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

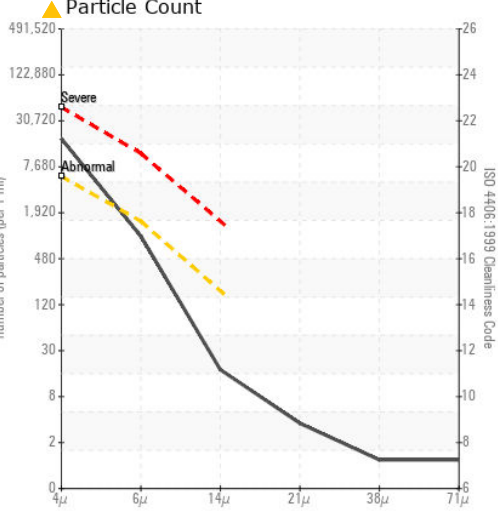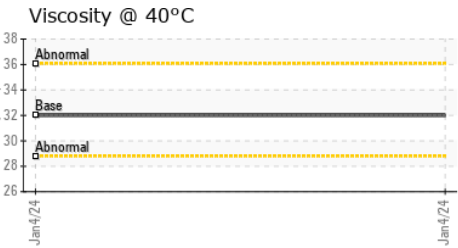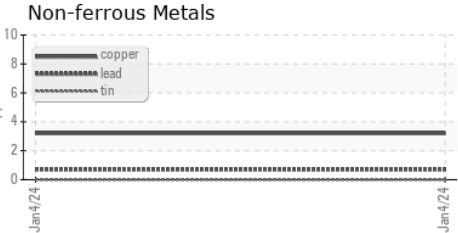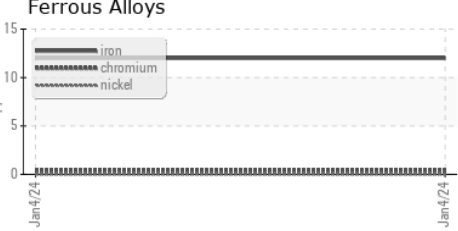

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ST43435 **Recieved** : 10 Jan 2024
Lab Number : 02607839 **Diagnosed** : 12 Jan 2024
Unique Number : 5708925 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KF)

HYDROMEC INC
 2921, BLVD WALLBERG
 DOLBEAU, QC
 CA G8L 1L6
 Contact: Melissa Dubois
 serviceadministrator@hydromec.ca
 T: (418)276-5831E x:t253
 F: (418)276-8166