




OIL ANALYSIS REPORT

Sample Rating Trend

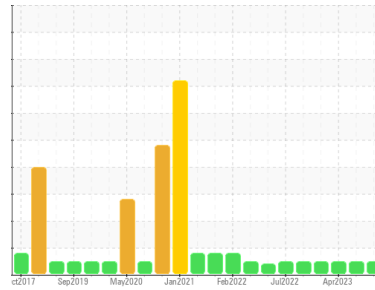

NORMAL



Machine Id
Timm Plunger 2
 Component
Gearbox
 Fluid
SHELL OMALA 68 (1 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

| | | | | |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | CB0031407 | CB0031373 | CB0030735 |
| Sample Date | Client Info | 29 Dec 2023 | 11 Sep 2023 | 16 Apr 2023 |
| Machine Age | mths | Client Info | 0 | 0 |
| Oil Age | mths | Client Info | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

CONTAMINATION method limit/base current history1 history2

| | | | | | |
|-------|-----------|------|------------|-----|-----|
| Water | WC Method | >0.2 | NEG | NEG | NEG |
|-------|-----------|------|------------|-----|-----|

WEAR METALS method limit/base current history1 history2

| | | | | | | |
|-----------|-----|---------------|------|--------------|----|----|
| PQ | | ASTM D8184* | | 0 | 0 | 0 |
| Iron | ppm | ASTM D5185(m) | >200 | 64 | 84 | 80 |
| Chromium | ppm | ASTM D5185(m) | >15 | 1 | 1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >15 | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >25 | <1 | <1 | 0 |
| Lead | ppm | ASTM D5185(m) | >100 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >200 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) | >25 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | >5 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |




ADDITIVES method limit/base current history1 history2

| | | | | | | |
|------------|-----|---------------|--|--------------|------|------|
| Boron | ppm | ASTM D5185(m) | | 0 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | | <1 | 1 | 2 |
| Magnesium | ppm | ASTM D5185(m) | | <1 | <1 | 0 |
| Calcium | ppm | ASTM D5185(m) | | 1 | 2 | 0 |
| Phosphorus | ppm | ASTM D5185(m) | | 290 | 298 | 329 |
| Zinc | ppm | ASTM D5185(m) | | 13 | 15 | 16 |
| Sulfur | ppm | ASTM D5185(m) | | 7577 | 8060 | 8044 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS method limit/base current history1 history2

| | | | | | | |
|-----------|-----|---------------|-----|--------------|----|----|
| Silicon | ppm | ASTM D5185(m) | >50 | 2 | 2 | 1 |
| Sodium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) | >20 | 1 | 0 | <1 |

OIL ANALYSIS REPORT

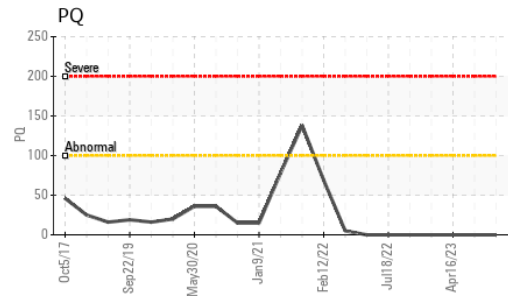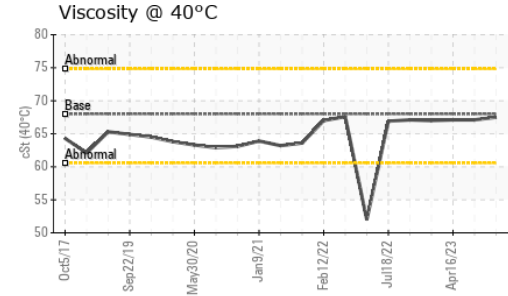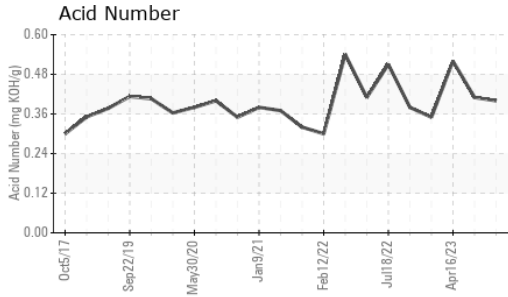



| FLUID CLEANLINESS | method | limit/base | current | history1 | history2 |
|-------------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >20000 | 13122 | --- | --- |
| Particles >6µm | ASTM D7647 | >5000 | 1518 | --- | --- |
| Particles >14µm | ASTM D7647 | >640 | 21 | --- | --- |
| Particles >21µm | ASTM D7647 | >160 | 4 | --- | --- |
| Particles >38µm | ASTM D7647 | >40 | 0 | --- | --- |
| Particles >71µm | ASTM D7647 | >10 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | 21/18/12 | --- | --- |

| FLUID DEGRADATION | method | limit/base | current | history1 | history2 |
|-------------------|---------------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g ASTM D974* | | 0.40 | 0.41 | 0.52 |

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|----------------|------------|--------------|----------|----------|
| White Metal | scalar Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|-------------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt ASTM D7279(m) | 68.0 | 67.5 | 67.1 | 67.1 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|



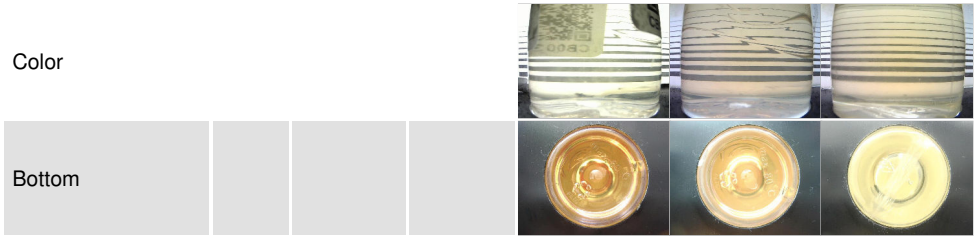


Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 TOYOTA MOTOR MANUFACTURING CANADA
Sample No. : CB0031407 **Received** : 10 Jan 2024 PLASTICS DEPARTMENT, 1717 DUNDAS ST
Lab Number : **02607849** **Diagnosed** : 16 Jan 2024 WOODSTOCK, ON
Unique Number : 5708935 **Diagnostician** : Kevin Marson CA N4S 0A4
Test Package : IND 3 (Additional Tests: PrtCount)
 Contact: Jeff Lafleur
 jeff.lafleur@toyota.com
 T: (519)653-1111
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
Timm Plunger 2
Component
Gearbox
Fluid
SHELL OMALA 68 (1 LTR)

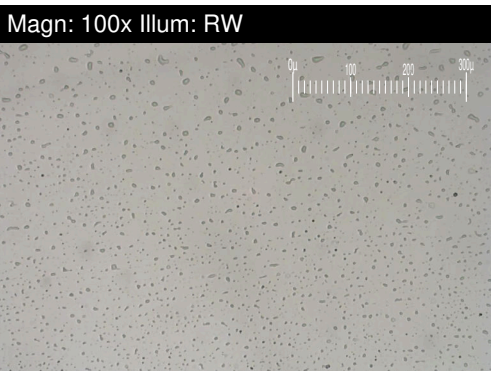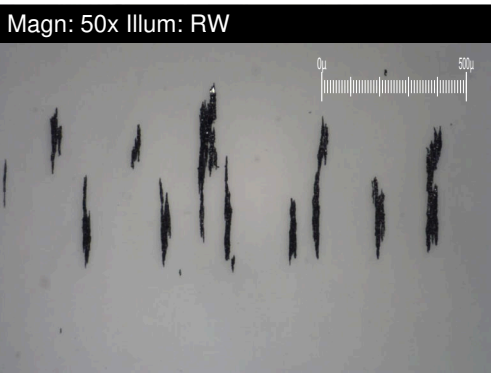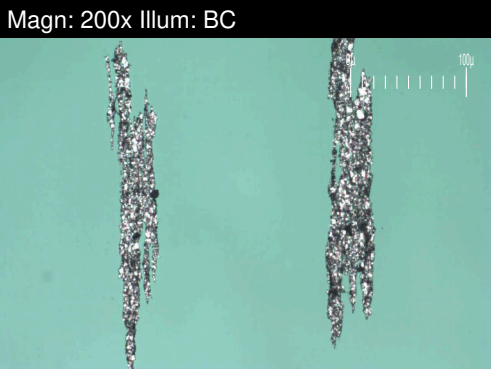


| DR-FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|----------------------------|---|----------|------------|-------------|----------|----------|
| Large Particles | | DR-Ferr* | | 24.2 | 17.0 | 5.9 |
| Small Particles | | DR-Ferr* | | 6.3 | 5.4 | 7.7 |
| Total Particles | | DR-Ferr* | >--- | 30.5 | 22.4 | 13.6 |
| Large Particles Percentage | % | DR-Ferr* | | 58.7 | 51.8 | 0 |
| Severity Index | | DR-Ferr* | | 433 | 197 | 11 |

| FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|-----------------------|------------|-------------|------------|----------|----------|----------|
| Ferrous Rubbing | Scale 0-10 | ASTM D7684* | | 3 | 4 | 4 |
| Ferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Rolling | Scale 0-10 | ASTM D7684* | | 1 | 2 | 2 |
| Ferrous Break-in | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Black Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Red Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Corrosive | Scale 0-10 | ASTM D7684* | | | 1 | 1 |
| Ferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rubbing | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rolling | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Carbonaceous Material | Scale 0-10 | ASTM D7684* | | | | |
| Lubricant Degradation | Scale 0-10 | ASTM D7684* | | | | |
| Sand/Dirt | Scale 0-10 | ASTM D7684* | | | 1 | 1 |
| Fibres | Scale 0-10 | ASTM D7684* | | | | |
| Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Other | Scale 0-10 | ASTM D7684* | | 1 | 1 | 2 |

WEAR

All component wear rates are normal.
The ferroggraphy results are normal
indicating no abnormal wear in the
system.

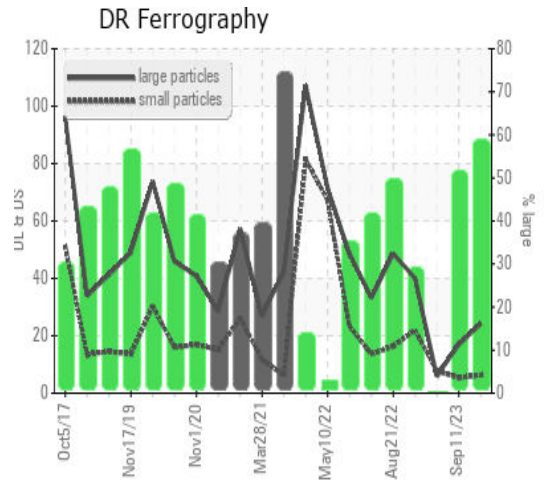

This page left intentionally blank