




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

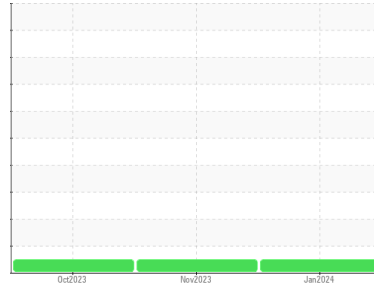

Area  
**[1496942]**  
 Machine Id  
**2353**  
 Component  
**Natural Gas Engine**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0891125</b>	WC0878143	WC0849737
Sample Date	Client Info			<b>10 Jan 2024</b>	20 Nov 2023	06 Oct 2023
Machine Age	kms	Client Info		<b>30932</b>	19187	10888
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>50	<b>8</b>	11	33
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	4
Lead	ppm	ASTM D5185(m)	>30	<b>1</b>	<1	2
Copper	ppm	ASTM D5185(m)	>35	<b>2</b>	3	16
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>8</b>	10	13
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	2
Molybdenum	ppm	ASTM D5185(m)		<b>52</b>	55	95
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	12
Magnesium	ppm	ASTM D5185(m)		<b>765</b>	743	596
Calcium	ppm	ASTM D5185(m)		<b>1216</b>	1186	1159
Phosphorus	ppm	ASTM D5185(m)		<b>633</b>	608	555
Zinc	ppm	ASTM D5185(m)		<b>821</b>	796	611
Sulfur	ppm	ASTM D5185(m)		<b>1971</b>	1844	1832
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>+100	<b>7</b>	9	38
Sodium	ppm	ASTM D5185(m)		<b>3</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>13.1</b>	11.9	7.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.7</b>	22.2	19.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.2</b>	19.4	14.6











# OIL ANALYSIS REPORT

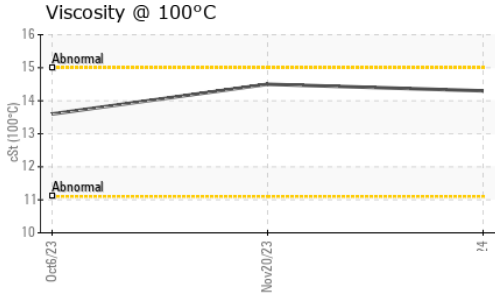

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	<b>14.3</b>	14.5	13.6

## GRAPHS

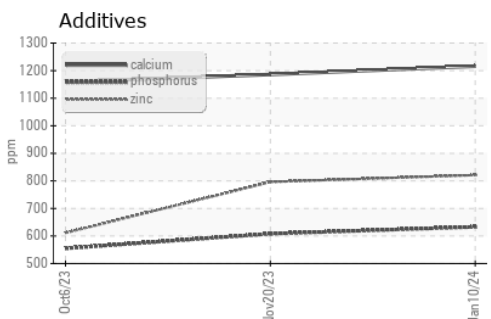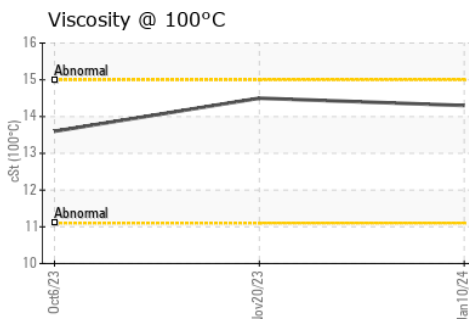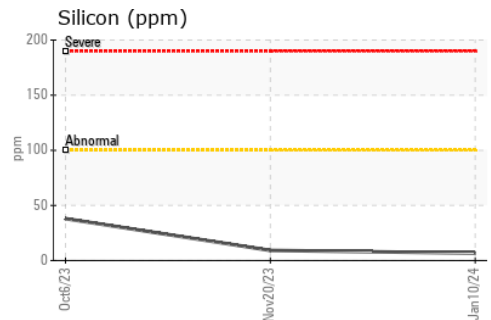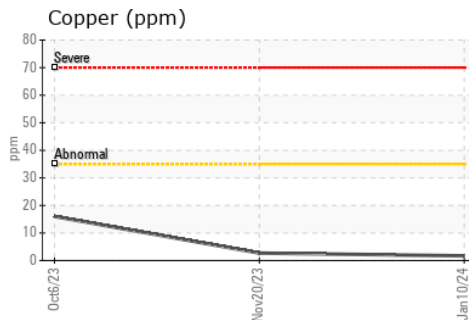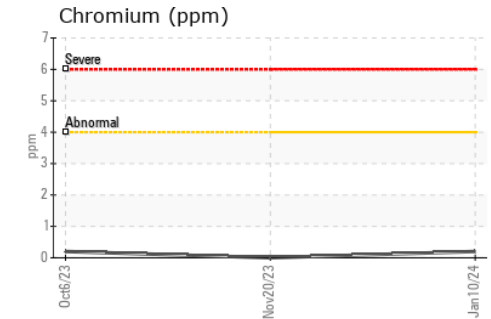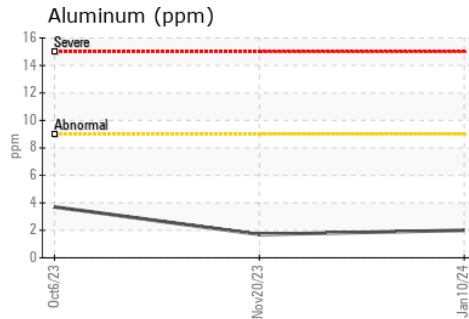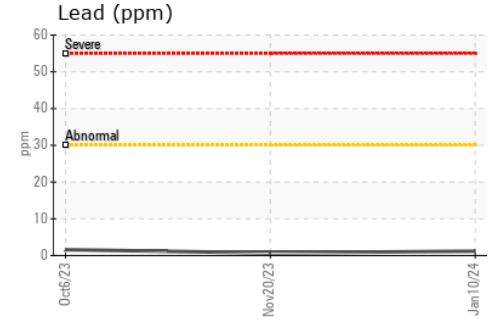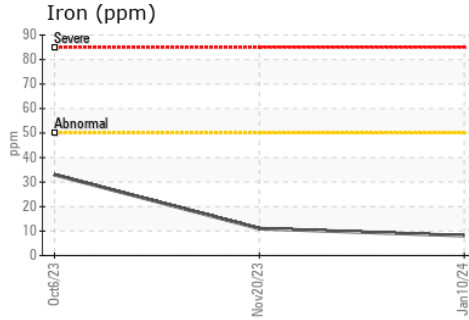

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0891125 **Received** : 11 Jan 2024  
**Lab Number** : 02608129 **Diagnosed** : 11 Jan 2024  
**Unique Number** : 5709215 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.