




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

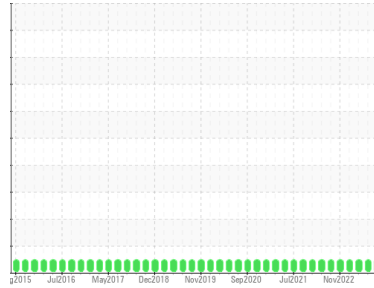

Area  
**Temboard/Service/Stock Preparation**  
 Machine Id  
**N/A N/A [804-236-040] TB Hardwood Refiner**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO NUTO H ISO 68 (37 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0873697</b>	WC0851496	WC0831892
Sample Date	Client Info		<b>10 Nov 2023</b>	10 Sep 2023	10 Jul 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >20	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185(m) 50	<b>48</b>	48	48
Phosphorus	ppm	ASTM D5185(m) 330	<b>335</b>	359	368
Zinc	ppm	ASTM D5185(m) 420	<b>422</b>	445	435
Sulfur	ppm	ASTM D5185(m) 3100	<b>4204</b>	4100	4276
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1






## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	1	4
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m) >20	<b>4</b>	0	<1
Water	%	ASTM D6304* >0.05	<b>0.003</b>	0.002	0.001
ppm Water	ppm	ASTM D6304* >500	<b>33</b>	18.2	7.6

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>279</b>	288	353
Particles >6µm	ASTM D7647	>1300	<b>88</b>	67	105
Particles >14µm	ASTM D7647	>160	<b>11</b>	5	10
Particles >21µm	ASTM D7647	>40	<b>4</b>	2	1
Particles >38µm	ASTM D7647	>10	<b>1</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/14	<b>15/14/11</b>	15/13/10	16/14/10

# OIL ANALYSIS REPORT

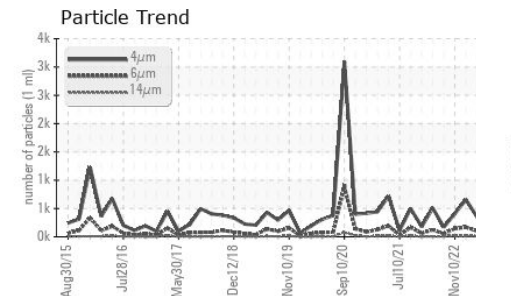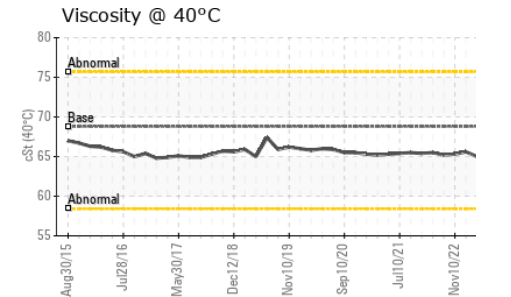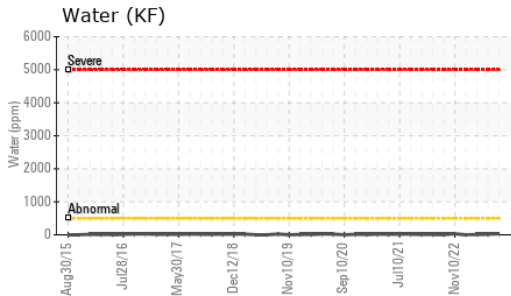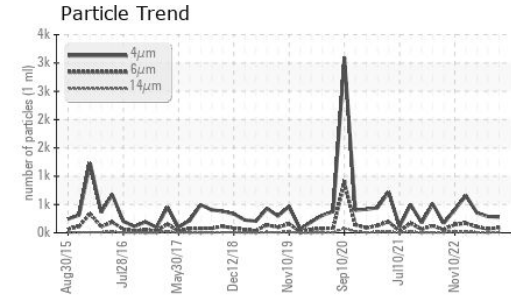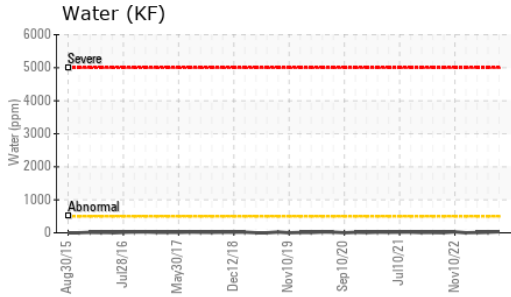


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	.40	<b>0.63</b>	0.43	0.41






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68.8	<b>65.0</b>	65.4	65.0

### SAMPLE IMAGES

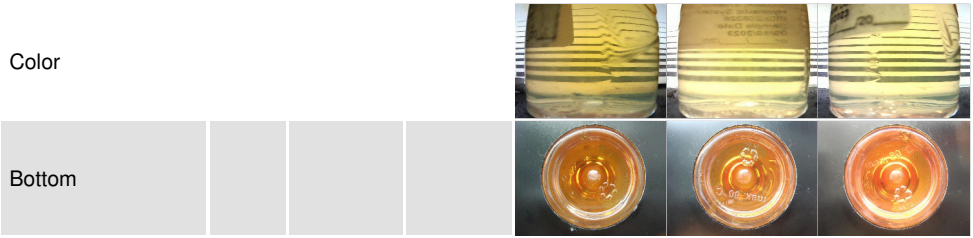

### GRAPHS

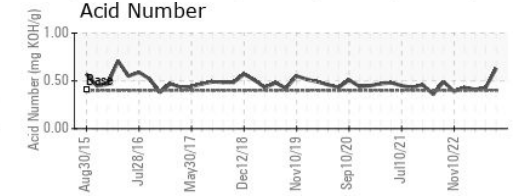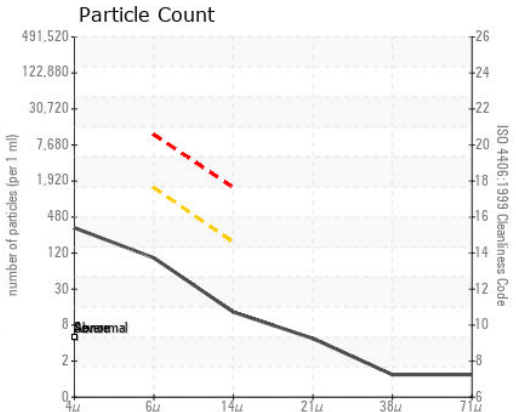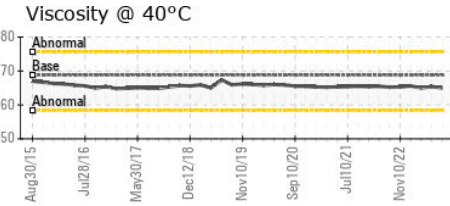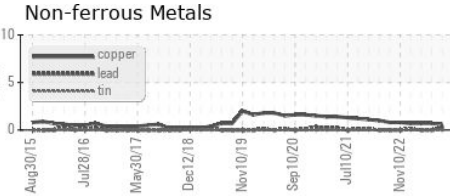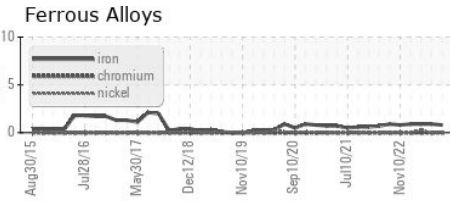

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0873697 **Received** : 11 Jan 2024  
**Lab Number** : **02608204** **Diagnosed** : 15 Jan 2024  
**Unique Number** : 5709290 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KF, TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Rayonier Advanced Materials**  
 P.O.Box 6000, 33 Kipawa Road  
 Temiscaming, QC  
 CA J0Z 3R0  
 Contact: Santosh Raikar  
 santosh.raikar@rayonieram.com  
 T: (819)627-4931  
 F: (819)627-1507