




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

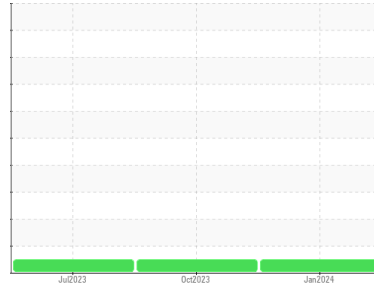

Area  
**(C-FDWM)**  
 Machine Id  
**[C-FDWM] BEEHCRAFT KING AIR B 200 PCE-PJ0637**  
 Component  
**Left Jet Turbine**  
 Fluid  
**EASTMAN TURBO OIL 2380 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

### Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0896781</b>	WC0863136	WC0818469
Sample Date	Client Info		<b>11 Jan 2024</b>	22 Oct 2023	23 Jul 2023
TSN	hrs	Client Info	<b>7247</b>	7088	6889
TSO	hrs	Client Info	<b>2730</b>	2571	2372
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed		Client Info	<b>N/A</b>	Not Chngd	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >8	<b>0</b>	0	0
Chromium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	0	<1
Calcium	ppm	ASTM D5185(m) 0	<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185(m) 2500	<b>2706</b>	2749	2800
Zinc	ppm	ASTM D5185(m) 0	<b>4</b>	4	6
Sulfur	ppm	ASTM D5185(m) 0	<b>0</b>	4	5
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >8	<b>1</b>	2	2
Sodium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Water	%	ASTM D6304* >0.1	<b>0.013</b>	0.060	0.067
ppm Water	ppm	ASTM D6304* >1000	<b>135</b>	604.4	673.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.43	<b>0.34</b>	0.28	0.29




# OIL ANALYSIS REPORT

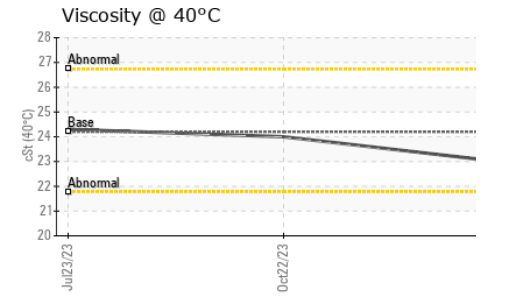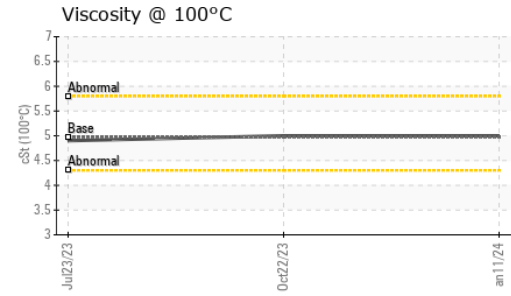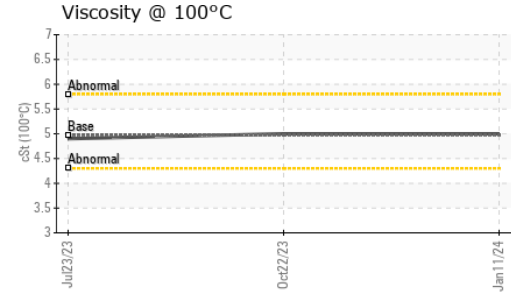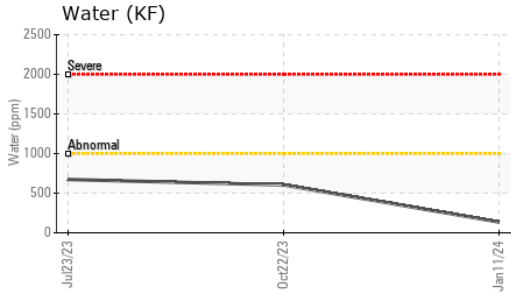





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D2729(m)	24.2	<b>23.0</b>	24.0	24.3
Visc @ 100°C	cSt	ASTM D2729(m)	4.97	<b>5</b>	5	4.9
Viscosity Index (VI)	Scale	ASTM D2270*	134	<b>150</b>	138	127

### SAMPLE IMAGES

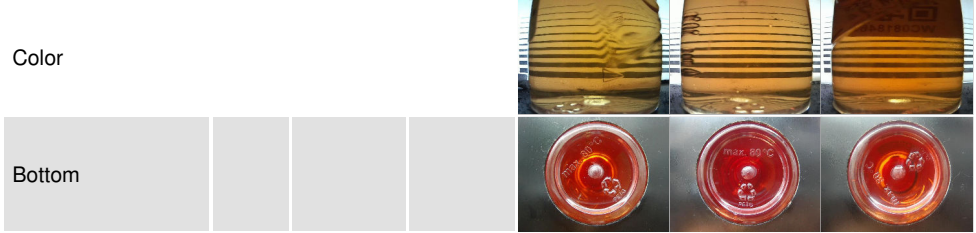

### GRAPHS

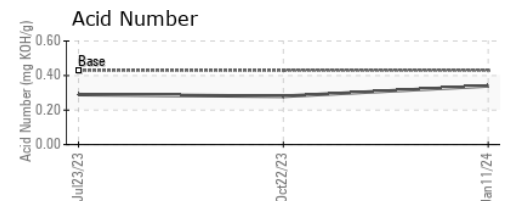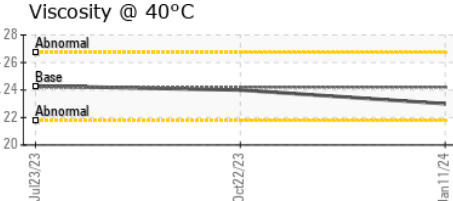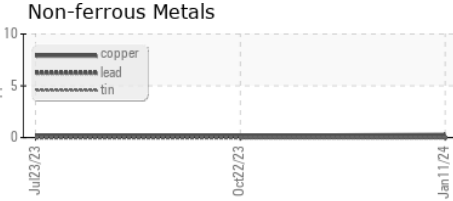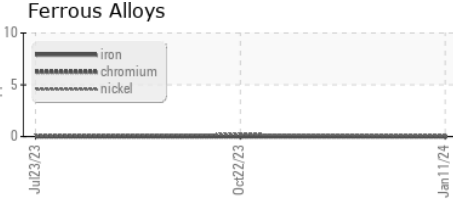

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0896781 **Recieved** : 15 Jan 2024  
**Lab Number** : **02608714** **Diagnosed** : 17 Jan 2024  
**Unique Number** : 5709800 **Diagnostician** : Kevin Marson  
**Test Package** : AVI 3




**Keewatin Air LP**  
 50 Morberg Way  
 Winnipeg, MB  
 CA R3H 0A4  
 Contact: Heather Karavas  
 hkaravas@keewatinair.ca  
 T: (204)888-0100  
 F: (204)888-5791

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.



# FERROGRAPHY REPORT

Area  
**(C-FDWM)**  
 Machine Id  
**[C-FDWM] BEEHCRAFT KING AIR B 200 PCE-PJ0637**  
 Component  
**Left Jet Turbine**  
 Fluid  
**EASTMAN TURBO OIL 2380 (--- GAL)**

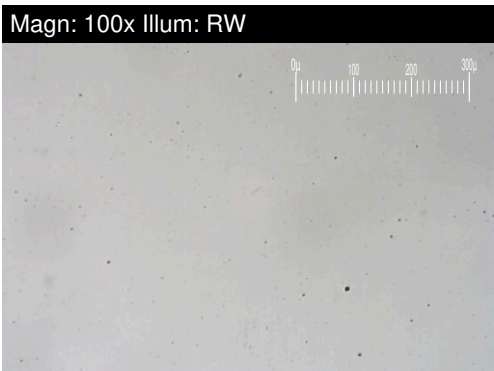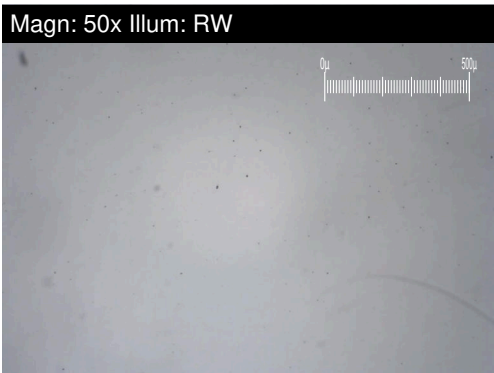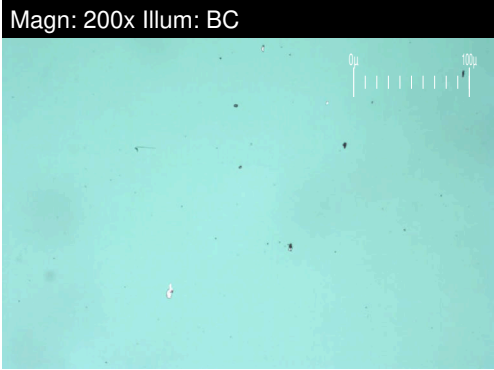


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>1.5</b>	1.1	0.6
Small Particles		DR-Ferr*		<b>1.3</b>	1.3	0.4
Total Particles		DR-Ferr*	>---	<b>2.8</b>	2.4	1
Large Particles Percentage	%	DR-Ferr*		<b>7.1</b>	0	20
Severity Index		DR-Ferr*		<b>0</b>	0	0

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*			1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

### WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

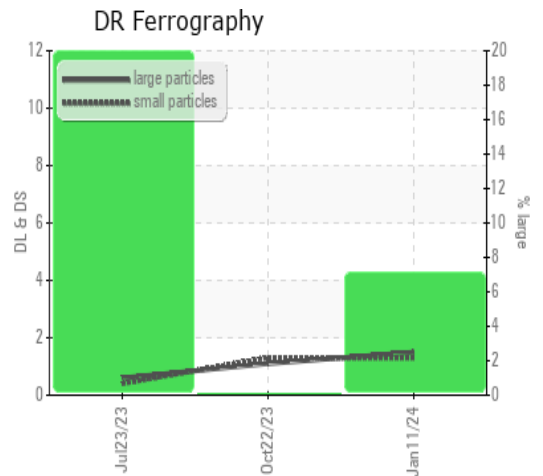

*This page left intentionally blank*