




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(C-GYSR)
 Machine Id
[C-GYSR] BEEHCRAFT B200 PCE-PJ0745
 Component
Left Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (14 LTR)

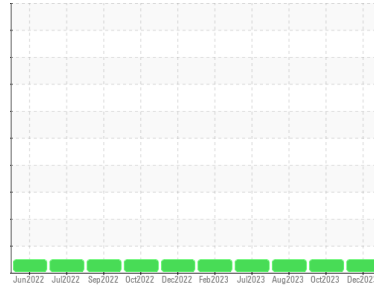

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0889947 | WC0863137 | WC0841648 |
| Sample Date | Client Info | | 19 Dec 2023 | 05 Oct 2023 | 08 Aug 2023 |
| TSN | hrs | Client Info | 8745 | 8551 | 8358 |
| TSO | hrs | Client Info | 5146 | 4951 | 4739 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | | Client Info | N/A | Not Changd | N/A |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >8 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185(m) >2 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >2 | 0 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) >2 | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185(m) >2 | <1 | 0 | <1 |
| Lead | ppm | ASTM D5185(m) >3 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) >3 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) >2 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | <1 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) 0 | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 0 | 0 | 0 | <1 |
| Calcium | ppm | ASTM D5185(m) 0 | 0 | 0 | <1 |
| Phosphorus | ppm | ASTM D5185(m) 2500 | 2703 | 2678 | 2808 |
| Zinc | ppm | ASTM D5185(m) 0 | <1 | <1 | 2 |
| Sulfur | ppm | ASTM D5185(m) 0 | 0 | 3 | 2 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS





| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >8 | <1 | <1 | <1 |
| Sodium | ppm | ASTM D5185(m) | 0 | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | 0 | <1 |
| Water | % | ASTM D6304* >0.1 | 0.028 | 0.062 | 0.084 |
| ppm Water | ppm | ASTM D6304* >1000 | 281 | 623.2 | 846.5 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* 0.43 | 0.31 | 0.32 | 0.33 |




OIL ANALYSIS REPORT

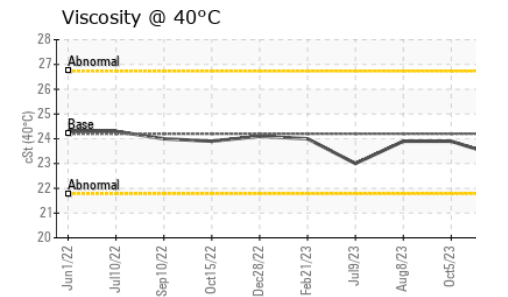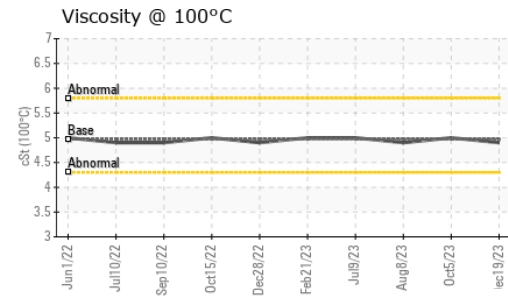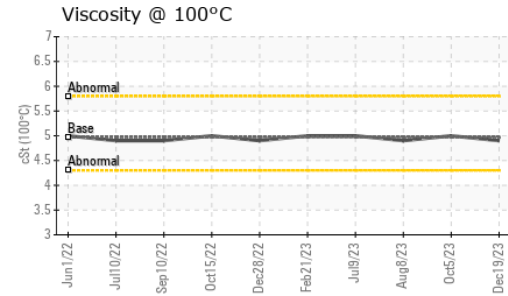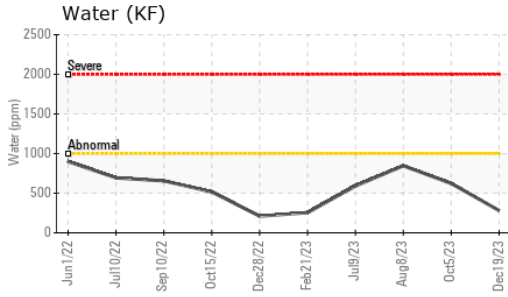





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|----------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 24.2 | 23.9 | 23.9 |
| Visc @ 100°C | cSt | ASTM D7279(m) | 4.97 | 5 | 4.9 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 134 | 140 | 131 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

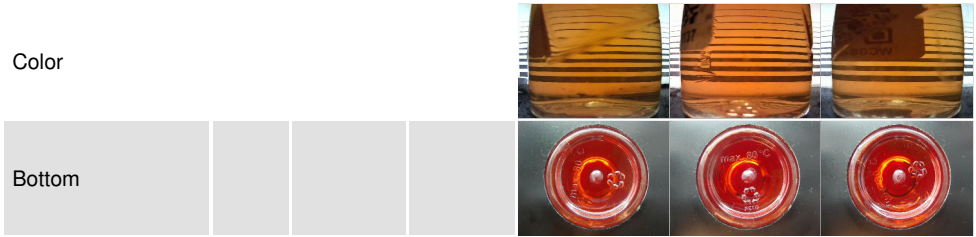

GRAPHS

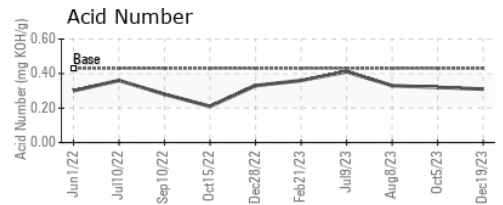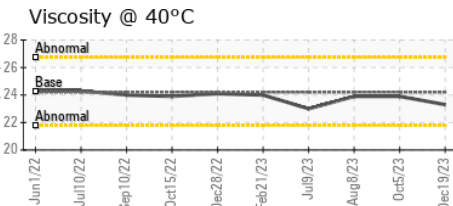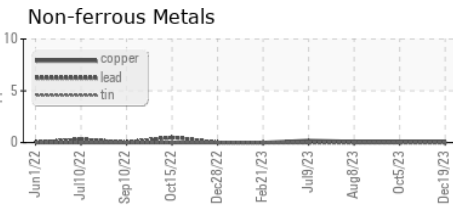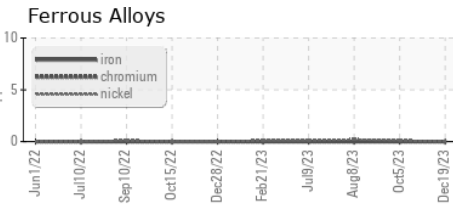

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889947 **Received** : 15 Jan 2024
Lab Number : 02608717 **Diagnosed** : 17 Jan 2024
Unique Number : 5709803 **Diagnostician** : Kevin Marson
Test Package : AVI 3

Keewatin Air LP
 50 Morberg Way
 Winnipeg, MB
 CA R3H 0A4
 Contact: Rochelle Aranez
 raranez@keewatinair.ca
 T: (204)888-0100
 F: (204)888-5791


To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.




FERROGRAPHY REPORT

Area
(C-GYSR)
 Machine Id
[C-GYSR] BEEHCRAFT B200 PCE-PJ0745
 Component
Left Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (14 LTR)


Magn: 200x Illum: BC

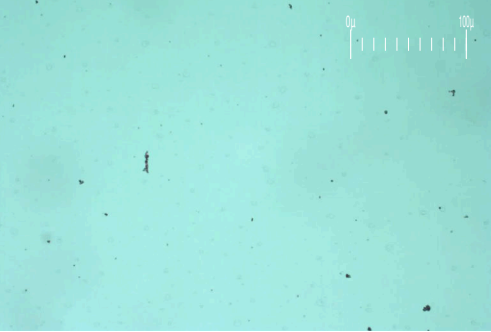

Magn: 50x Illum: RW

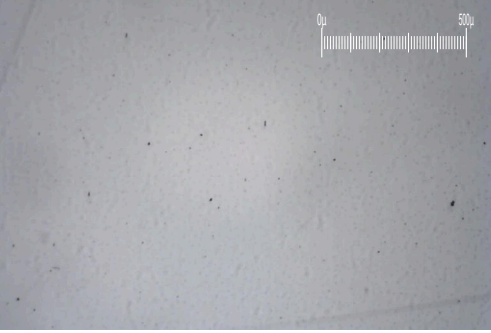

Magn: 100x Illum: RW

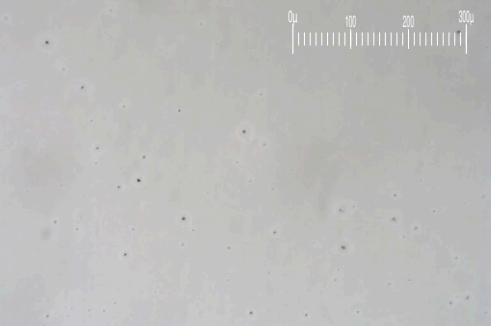


| DR-FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|----------------------------|---|----------|------------|------------|----------|----------|
| Large Particles | | DR-Ferr* | | 3.0 | 0.5 | 4.6 |
| Small Particles | | DR-Ferr* | | 2.9 | 0.3 | 0.2 |
| Total Particles | | DR-Ferr* | >--- | 5.9 | 0.8 | 4.8 |
| Large Particles Percentage | % | DR-Ferr* | | 1.7 | 25 | 91.7 |
| Severity Index | | DR-Ferr* | | 0 | 0 | 20 |

| FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|-----------------------|------------|-------------|------------|---------|----------|----------|
| Ferrous Rubbing | Scale 0-10 | ASTM D7684* | | 1 | 2 | 1 |
| Ferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Rolling | Scale 0-10 | ASTM D7684* | | 1 | 1 | 1 |
| Ferrous Break-in | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Black Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Red Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Corrosive | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rubbing | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rolling | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Carbonaceous Material | Scale 0-10 | ASTM D7684* | | | | |
| Lubricant Degradation | Scale 0-10 | ASTM D7684* | | | | |
| Sand/Dirt | Scale 0-10 | ASTM D7684* | | | 1 | 1 |
| Fibres | Scale 0-10 | ASTM D7684* | | | | |
| Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Other | Scale 0-10 | ASTM D7684* | | 1 | 1 | 1 |

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

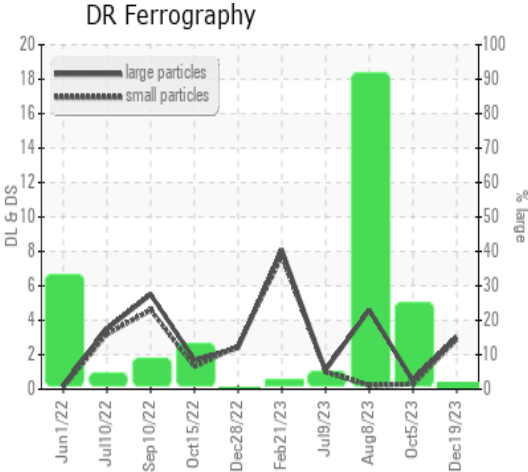

This page left intentionally blank