


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

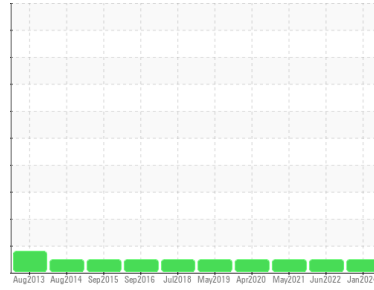

Area
CODEQUID HOUSING [6100230869]
Machine Id
JOHN DEERE PE4045L170665
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WA0021028	WA0018112	WA0016503
Sample Date	Client Info		03 Jan 2024	07 Jun 2022	10 May 2021
Machine Age	hrs	Client Info	651	441	391
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	<1.0
Water	WC Method	>0.21	NEG	NEG	NEG
Glycol	WC Method		NEG	0.0	0.0

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>51	9	3	3
Chromium	ppm	ASTM D5185(m)	>11	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>31	2	<1	<1
Lead	ppm	ASTM D5185(m)	>26	<1	0	0
Copper	ppm	ASTM D5185(m)	>26	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	29	181	183
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	46	<1	<1
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	740	12	12
Calcium	ppm	ASTM D5185(m)	1070	1292	2130	2170
Phosphorus	ppm	ASTM D5185(m)	1150	986	1014	970
Zinc	ppm	ASTM D5185(m)	1270	1140	1136	1158
Sulfur	ppm	ASTM D5185(m)	2060	2738	3049	3123
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>22	2	2	4
Sodium	ppm	ASTM D5185(m)	>31	1	2	2
Potassium	ppm	ASTM D5185(m)	>20	1	8	7

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.1	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.4	5.7	5.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.5	22.6	21.4

OIL ANALYSIS REPORT

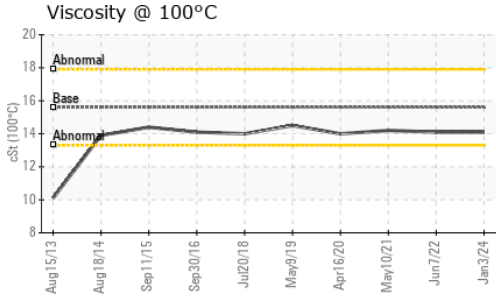

FLUID DEGRADATION	method	limit/base	current	history1	history2
-------------------	--------	------------	---------	----------	----------

Oxidation	Abs./1mm	ASTM D7414*	>25	13.9	16.5	16.8
-----------	----------	-------------	-----	-------------	------	------

VISUAL	method	limit/base	current	history1	history2
--------	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.21	NEG	NEG	NEG
------------------	--------	---------	-------	------------	-----	-----

Free Water	scalar	Visual*		NEG	NEG	NEG
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	15.6	14.1	14.1	14.2
--------------	-----	---------------	------	-------------	------	------

GRAPHS

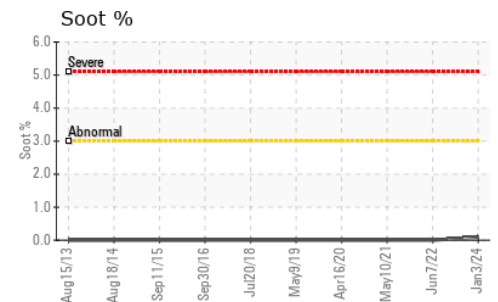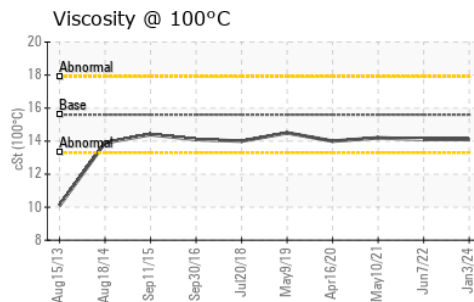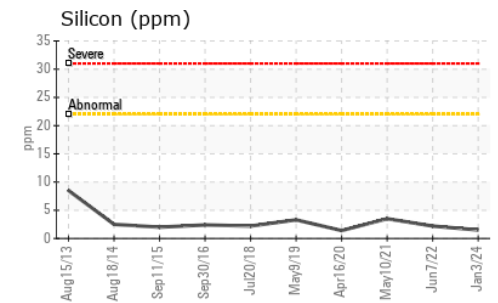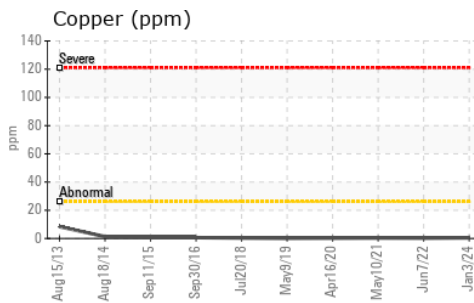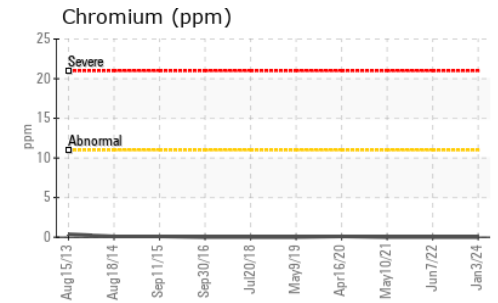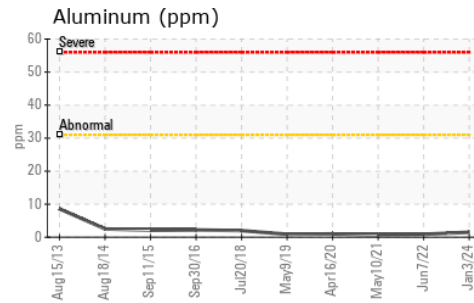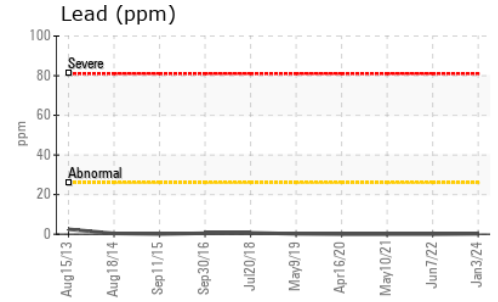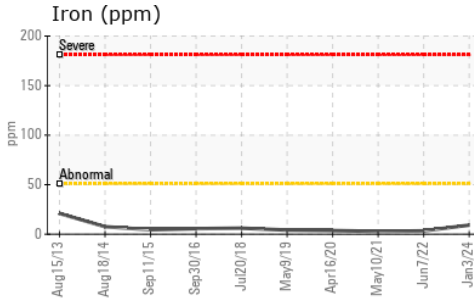

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0021028 **Received** : 16 Jan 2024
Lab Number : 02608947 **Diagnosed** : 16 Jan 2024
Unique Number : 5710033 **Diagnostician** : Wes Davis
Test Package : MOB 1

Wajax Power Systems
 70 Raddall Avenue
 Dartmouth, NS
 CA B3B 1T7
 Contact: Danelle Hoffman
 dhoffman@wajax.com
 T: (902)468-6200
 F: (902)468-3325

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.