

OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



DODGE CVI-I

Component

Gasoline Engine

MOBIL 1 5W30 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.


▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 20 range, advise investigate. The condition of the oil is suitable for further service.

				Dec2023		
0.11101 5 1115001						
SAMPLE INFORM	TATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0779301		
Sample Date		Client Info		23 Dec 2023		
Machine Age	kms	Client Info		176000		
Oil Age	kms	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
MEADMETALC		mathad	limit/hooo	ou was not	hiotomid	biotom/0
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	8		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>5	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)	>2	0		
Aluminum	ppm	ASTM D5185(m)	>40	2		
Lead	ppm	ASTM D5185(m)	>50	<1		
Copper	ppm	ASTM D5185(m)	>155	12		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	94	52		
Barium	ppm	ASTM D5185(m)	0.0	0		
Molybdenum	ppm	ASTM D5185(m)	0.0	94		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	1388	659		
Calcium	ppm	ASTM D5185(m)	820	706		
Phosphorus	ppm	ASTM D5185(m)	720	623		
Zinc	ppm	ASTM D5185(m)	780	715		
Sulfur	ppm	ASTM D5185(m)	2240	1758		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	11		
Sodium	ppm	ASTM D5185(m)	>400	3		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Fuel	%	ASTM D7593*	>4.0	0.2		
INFRA-RED		method	limit/base	current	history1	history2
	0/		minu base			
Soot %	%	ASTM D7844*	00	0		
Nitration	Abs/cm	ASTM D7624*	>20	10.8		
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.8		



OIL ANALYSIS REPORT

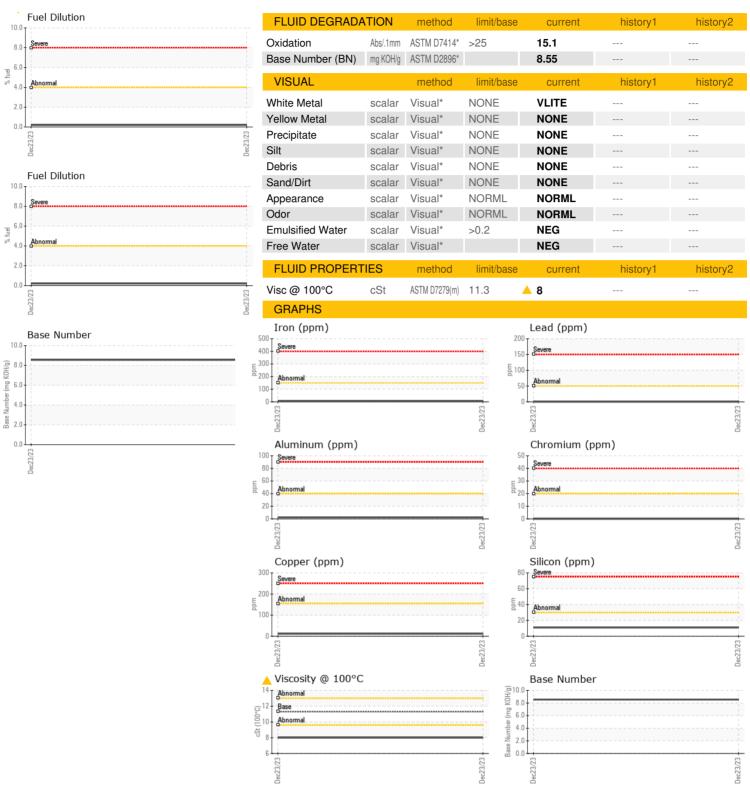



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0779301

: 02608977

: 5710063

Recieved : 16 Jan 2024 Diagnosed : 18 Jan 2024 Diagnostician : Kevin Marson

Test Package: MOB 2 (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Colosi Vehicle Investigations

6029 Pitton Rd Niagara Falls, ON **CA L2H 1S2** Contact: Russ Colosi russ@colosi.ca T: (289)294-0702