




# OIL ANALYSIS REPORT

Sample Rating Trend

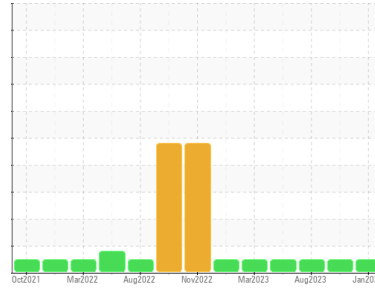

**NORMAL**



Area  
**(C-GQNJ)**  
Machine Id  
**[C-GQNJ] BEECHCRAFT KING AIR 200 PCE-PJ1306**  
Component  
**Left Jet Turbine**  
Fluid  
**EASTMAN TURBO OIL 2380 (12 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

### Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0887240</b>   | WC0866217   | WC0844513   |
| Sample Date   | Client Info |             | <b>08 Jan 2024</b> | 30 Oct 2023 | 16 Aug 2023 |
| TSN           | hrs         | Client Info | <b>5330</b>        | 5102        | 4902        |
| TSO           | hrs         | Client Info | <b>5330</b>        | 5102        | 4902        |
| Oil Age       | hrs         | Client Info | <b>600</b>         | 372         | 1954        |
| Oil Changed   |             | Client Info | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## WEAR METALS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >8 | <b>0</b>     | 0        | 0        |
| Chromium  | ppm    | ASTM D5185(m) >2 | <b>0</b>     | 0        | 0        |
| Nickel    | ppm    | ASTM D5185(m) >2 | <b>&lt;1</b> | <1       | <1       |
| Titanium  | ppm    | ASTM D5185(m) >2 | <b>0</b>     | 0        | 0        |
| Silver    | ppm    | ASTM D5185(m) >2 | <b>0</b>     | <1       | 0        |
| Aluminum  | ppm    | ASTM D5185(m) >2 | <b>&lt;1</b> | 0        | <1       |
| Lead      | ppm    | ASTM D5185(m) >3 | <b>0</b>     | <1       | <1       |
| Copper    | ppm    | ASTM D5185(m) >3 | <b>0</b>     | <1       | <1       |
| Tin       | ppm    | ASTM D5185(m) >2 | <b>0</b>     | 0        | 0        |
| Antimony  | ppm    | ASTM D5185(m)    | <b>0</b>     | 0        | 0        |
| Vanadium  | ppm    | ASTM D5185(m)    | <b>0</b>     | 0        | 0        |
| Beryllium | ppm    | ASTM D5185(m)    | <b>0</b>     | 0        | 0        |
| Cadmium   | ppm    | ASTM D5185(m)    | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base         | current      | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) 0    | <b>0</b>     | <1       | 0        |
| Barium     | ppm    | ASTM D5185(m) 0    | <b>0</b>     | <1       | 0        |
| Molybdenum | ppm    | ASTM D5185(m) 0    | <b>0</b>     | 0        | 0        |
| Manganese  | ppm    | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Magnesium  | ppm    | ASTM D5185(m) 0    | <b>&lt;1</b> | 0        | 0        |
| Calcium    | ppm    | ASTM D5185(m) 0    | <b>0</b>     | <1       | <1       |
| Phosphorus | ppm    | ASTM D5185(m) 2500 | <b>2708</b>  | 2641     | 2692     |
| Zinc       | ppm    | ASTM D5185(m) 0    | <b>1</b>     | 1        | 2        |
| Sulfur     | ppm    | ASTM D5185(m) 0    | <b>0</b>     | 2        | 2        |
| Lithium    | ppm    | ASTM D5185(m)      | <b>&lt;1</b> | <1       | <1       |

## CONTAMINANTS





|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >8  | <b>0</b>     | 2        | 2        |
| Sodium    | ppm    | ASTM D5185(m)     | <b>0</b>     | <1       | 0        |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | 0        | <1       |
| Water     | %      | ASTM D6304* >0.1  | <b>0.015</b> | 0.043    | 0.045    |
| ppm Water | ppm    | ASTM D6304* >1000 | <b>157</b>   | 437.1    | 456.3    |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* 0.43 | <b>0.31</b> | 0.27     | 0.25     |



# OIL ANALYSIS REPORT

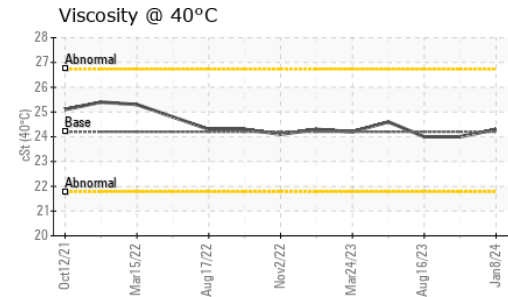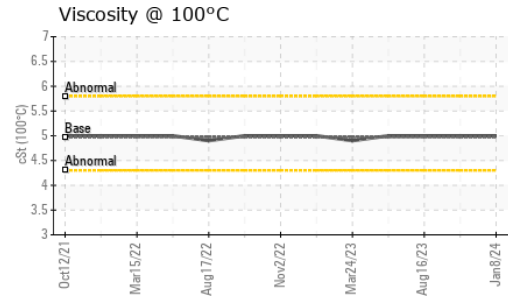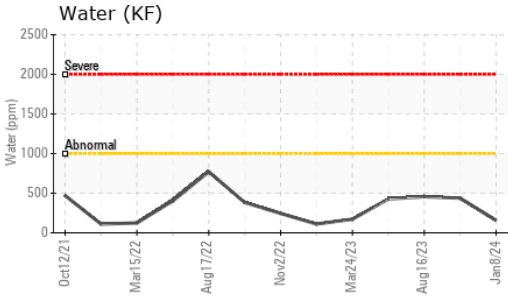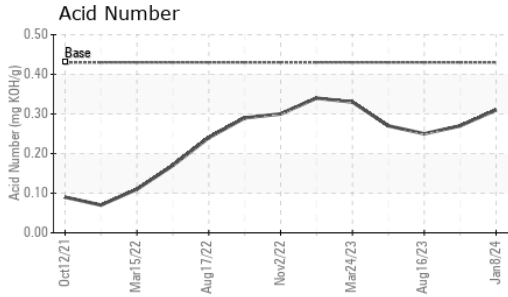

| VISUAL           | method | limit/base | current | history1     | history2 |       |
|------------------|--------|------------|---------|--------------|----------|-------|
| White Metal      | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Yellow Metal     | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Precipitate      | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Silt             | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Debris           | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Sand/Dirt        | scalar | Visual*    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Appearance       | scalar | Visual*    | NORML   | <b>NORML</b> | NORML    | NORML |
| Odor             | scalar | Visual*    | NORML   | <b>NORML</b> | NORML    | NORML |
| Emulsified Water | scalar | Visual*    | >0.1    | <b>NEG</b>   | NEG      | NEG   |
| Free Water       | scalar | Visual*    |         | <b>NEG</b>   | NEG      | NEG   |

| FLUID PROPERTIES     | method | limit/base    | current | history1    | history2 |      |
|----------------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 40°C          | cSt    | ASTM D7279(m) | 24.2    | <b>24.3</b> | 24.0     | 24.0 |
| Visc @ 100°C         | cSt    | ASTM D7279(m) | 4.97    | <b>5</b>    | 5        | 5    |
| Viscosity Index (VI) | Scale  | ASTM D2270*   | 134     | <b>135</b>  | 138      | 138  |

| SAMPLE IMAGES | method | limit/base | current  | history1 | history2 |
|---------------|--------|------------|----------|----------|----------|
| Color         |        |            |          |          |          |
| Bottom        |        |            |          |          |          |
| PrtFilter     |        |            | no image | no image |          |



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0887240  
**Lab Number** : **02608979**  
**Unique Number** : 5710065  
**Test Package** : AVI 3

**Recieved** : 16 Jan 2024  
**Diagnosed** : 17 Jan 2024  
**Diagnostician** : Kevin Marson

**FAST AIR LTD**  
 80 HANGAR LINE ROAD  
 WINNIPEG, MB  
 CA R3J 3Y7

Contact: Denis Bourgouin  
 denis.bourgouin@flyfastair.com  
 T: (204)772-7622  
 F: (204)783-2483


To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.




# FERROGRAPHY REPORT

Area  
**(C-GQNJ)**  
 Machine Id  
**[C-GQNJ] BEECHCRAFT KING AIR 200 PCE-PJ1306**  
 Component  
**Left Jet Turbine**  
 Fluid  
**EASTMAN TURBO OIL 2380 (12 QTS)**


Magn: 200x Illum: BC

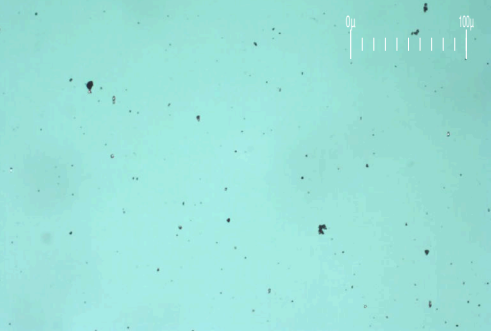

Magn: 50x Illum: RW

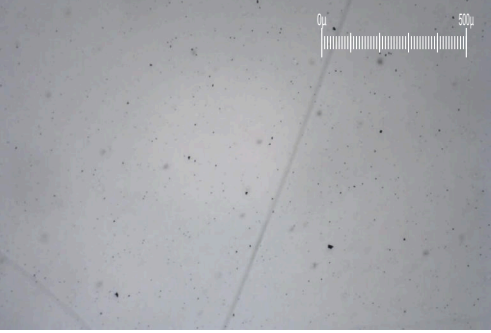

Magn: 100x Illum: RW

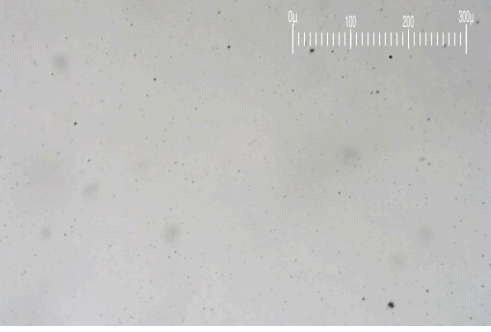


| DR-FERROGRAPHY             |   | method   | limit/base | current     | history1 | history2 |
|----------------------------|---|----------|------------|-------------|----------|----------|
| Large Particles            |   | DR-Ferr* |            | <b>1.0</b>  | 3.5      | 1.4      |
| Small Particles            |   | DR-Ferr* |            | <b>0.8</b>  | 3.7      | 0.6      |
| Total Particles            |   | DR-Ferr* | >---       | <b>1.8</b>  | 7.2      | 2        |
| Large Particles Percentage | % | DR-Ferr* |            | <b>11.1</b> | 0        | 40       |
| Severity Index             |   | DR-Ferr* |            | <b>0</b>    | 1        | 1        |

| FERROGRAPHY           |            | method      | limit/base | current | history1 | history2 |
|-----------------------|------------|-------------|------------|---------|----------|----------|
| Ferrous Rubbing       | Scale 0-10 | ASTM D7684* |            | 1       | 2        | 1        |
| Ferrous Sliding       | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Ferrous Cutting       | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Ferrous Rolling       | Scale 0-10 | ASTM D7684* |            | 1       | 1        | 1        |
| Ferrous Break-in      | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Ferrous Spheres       | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Ferrous Black Oxides  | Scale 0-10 | ASTM D7684* |            |         | 1        |          |
| Ferrous Red Oxides    | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Ferrous Corrosive     | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Ferrous Other         | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Nonferrous Rubbing    | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Nonferrous Sliding    | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Nonferrous Cutting    | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Nonferrous Rolling    | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Nonferrous Other      | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Carbonaceous Material | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Lubricant Degradation | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Sand/Dirt             | Scale 0-10 | ASTM D7684* |            | 1       | 2        | 1        |
| Fibres                | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Spheres               | Scale 0-10 | ASTM D7684* |            |         |          |          |
| Other                 | Scale 0-10 | ASTM D7684* |            | 1       |          | 1        |

### WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

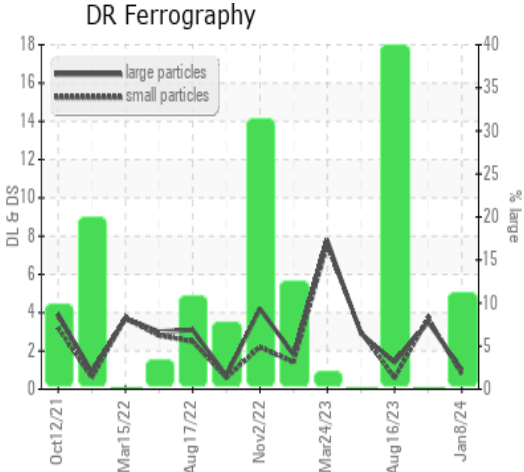

*This page left intentionally blank*