




# OIL ANALYSIS REPORT

Sample Rating Trend

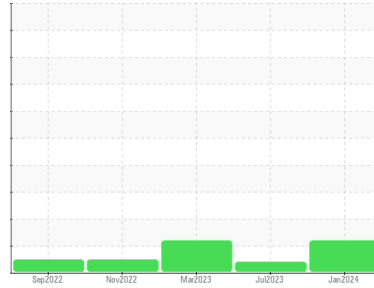

FUEL



Area  
**[42858069]**  
 Machine Id  
**424122**

Component  
**Diesel Engine**  
 Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Light fuel dilution occurring.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0853072</b>	WC0796415	WC0796315
Sample Date	Client Info		<b>12 Jan 2024</b>	28 Jul 2023	16 Mar 2023
Machine Age	kms	Client Info	<b>285904</b>	203990	190471
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	0.0	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>24</b>	8	44
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	3
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>7</b>	5	11
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185(m)	>330	<b>3</b>	1	42
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	<b>21</b>	57	21
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>7</b>	2	10
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185(m)	450	<b>690</b>	729	738
Calcium	ppm	ASTM D5185(m)	3000	<b>1406</b>	1335	1413
Phosphorus	ppm	ASTM D5185(m)	1150	<b>724</b>	728	775
Zinc	ppm	ASTM D5185(m)	1350	<b>799</b>	776	838
Sulfur	ppm	ASTM D5185(m)	4250	<b>2691</b>	2541	2435
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>8</b>	6	10
Sodium	ppm	ASTM D5185(m)	>158	<b>4</b>	3	4
Potassium	ppm	ASTM D5185(m)	>20	<b>12</b>	20	28
Fuel	%	ASTM D7593*	>5	<b>▲ 2.7</b>	0.6	0.7


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>1</b>	0.4	▲ 3
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.4</b>	7.5	11.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.9</b>	18.2	27.4



# OIL ANALYSIS REPORT

▲ Viscosity @ 100°C

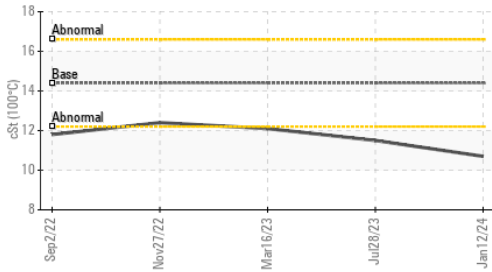

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.2	11.1	17.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.7	▲ 11.5	▲ 12.1

▲ Fuel Dilution

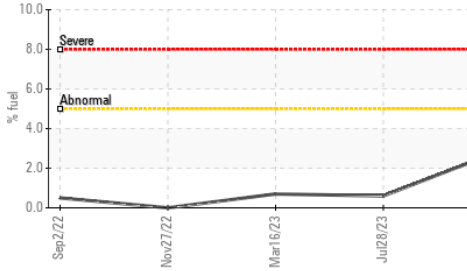


GRAPHS


Iron (ppm)

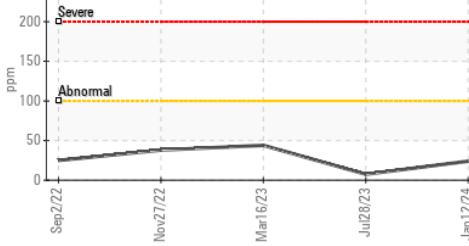


Lead (ppm)

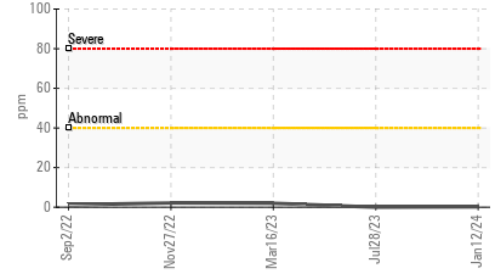


Aluminum (ppm)

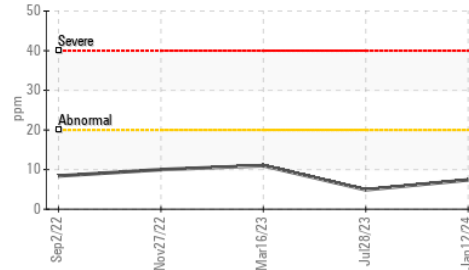


Chromium (ppm)

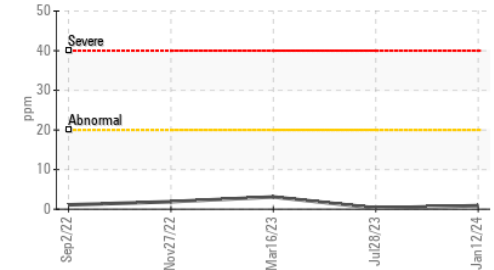


Copper (ppm)

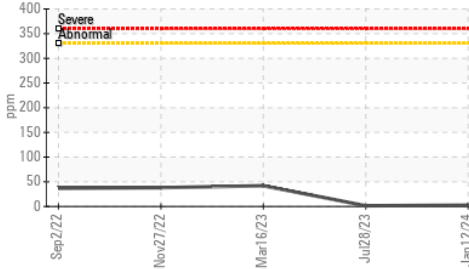


Silicon (ppm)

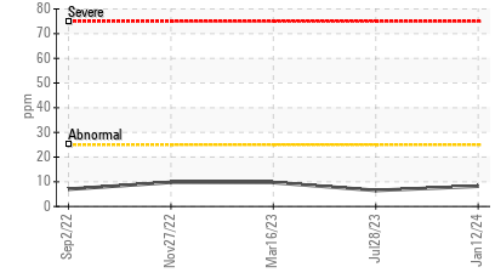

▲ Viscosity @ 100°C

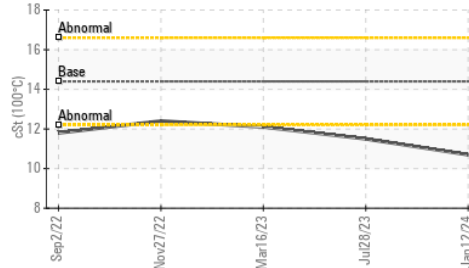

▲ Fuel Dilution

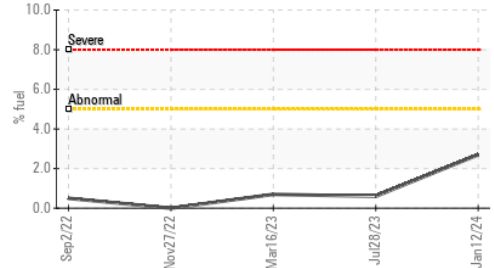

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0853072 **Received** : 17 Jan 2024  
**Lab Number** : 02609194 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 5710280 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.