




OIL ANALYSIS REPORT

Sample Rating Trend

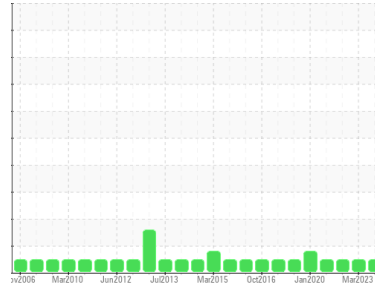

NORMAL



Area
(CFROA)
Machine Id
[CFROA] NORTH AMERICAN HARVARD MK IV 41-11158
Component
Piston Aircraft Engine
Fluid
PHILLIPS 66 AVIATION X/C SAE 25W60 (36 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0879760	WC0566094	WC0566097
Sample Date	Client Info		16 Jan 2024	01 Mar 2023	07 Feb 2022
TSN	hrs	Client Info	0	1355	1349
TSO	hrs	Client Info	1361	686	680
Oil Age	hrs	Client Info	6	6	9
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	6	6	9
Chromium	ppm	ASTM D5185(m)	>40	2	3	2
Nickel	ppm	ASTM D5185(m)	>15	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	2	2	3
Lead	ppm	ASTM D5185(m)	>20000	409	502	729
Copper	ppm	ASTM D5185(m)	>25	4	4	8
Tin	ppm	ASTM D5185(m)	>30	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	1	<1

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		0	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		0	<1	<1
Calcium	ppm	ASTM D5185(m)		3	13	78
Phosphorus	ppm	ASTM D5185(m)		5	18	135
Zinc	ppm	ASTM D5185(m)		1	2	4
Sulfur	ppm	ASTM D5185(m)		1247	1402	1902
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	4	4	5
Sodium	ppm	ASTM D5185(m)		0	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1






OIL ANALYSIS REPORT

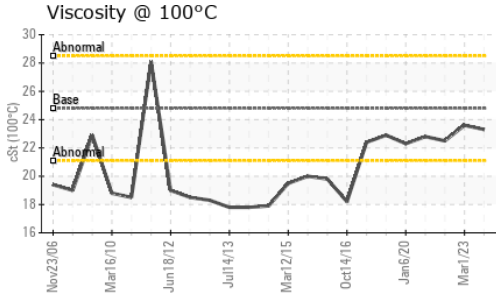

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	VLITE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	24.8	23.3	23.6	22.5

GRAPHS

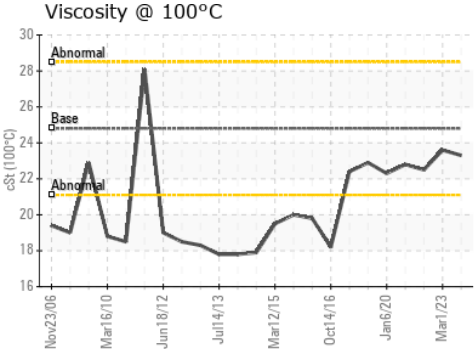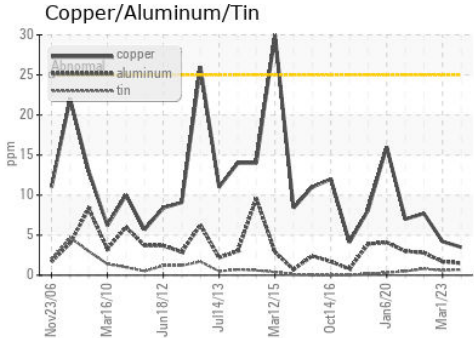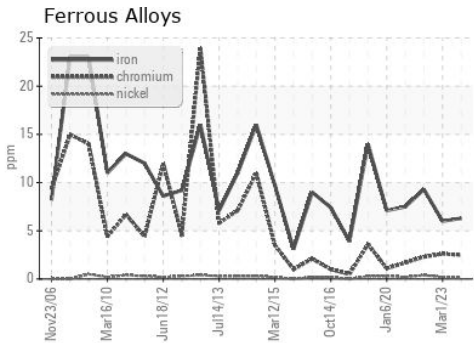

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 7088302 CANADA INC - VINTECH AERO
Sample No. : WC0879760 **Received** : 17 Jan 2024 1699 ARTHUR-FECTEAU ST.
Lab Number : **02609295** **Diagnosed** : 17 Jan 2024 GATINEAU, QC
Unique Number : 5710381 **Diagnostician** : Kevin Marson CA J8R 2Z9
Test Package : AVI 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Andre Laviolette
 andre@vintechaero.ca
 T: (819)669-9603 x:239
 F: (819)669-9608