




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area
(T-21914)
 Machine Id
[T-21914] 8589191201
 Component
Hydraulic System
 Fluid
MIL-PRF-5606H (--- GAL)

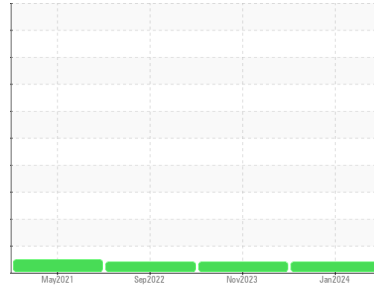

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

Contaminants

There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Oil Condition

Viscosity of sample indicates oil is within ISO 10 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0833068	WC0833089	WC0744603
Sample Date	Client Info	12 Jan 2024	08 Nov 2023	27 Sep 2022
TSN	hrs	0	0	0
TSO	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	<1	<1	<1
Chromium	ppm ASTM D5185(m) >10	0	0	0
Nickel	ppm ASTM D5185(m) >10	0	<1	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	0	<1	0
Aluminum	ppm ASTM D5185(m) >10	<1	<1	<1
Lead	ppm ASTM D5185(m) >20	0	0	<1
Copper	ppm ASTM D5185(m) >20	<1	<1	<1
Tin	ppm ASTM D5185(m) >10	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	0	<1	0
Barium	ppm ASTM D5185(m)	0	<1	0
Molybdenum	ppm ASTM D5185(m)	0	0	0
Manganese	ppm ASTM D5185(m)	0	0	0
Magnesium	ppm ASTM D5185(m)	<1	0	0
Calcium	ppm ASTM D5185(m)	<1	<1	0
Phosphorus	ppm ASTM D5185(m)	391	389	426
Zinc	ppm ASTM D5185(m)	8	8	6
Sulfur	ppm ASTM D5185(m)	104	117	117
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	2	2	2
Sodium	ppm ASTM D5185(m)	0	<1	0
Potassium	ppm ASTM D5185(m) >20	<1	0	<1


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles 5-15µm	count NAS 1638 >128000	77779	73765	42140
Particles 15-25µm	count NAS 1638 >22800	1660	2282	2253
Particles 25-50µm	count NAS 1638 >4050	567	510	1000
Particles 50-100µm	count NAS 1638 >720	14	0	114
Particles >100µm	count NAS 1638 >128	13	75	33
NAS 1638	Class NAS 1638 >9	9	9	8




OIL ANALYSIS REPORT


▲ Viscosity @ 40°C

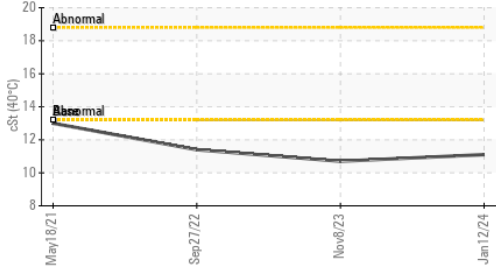

Particle Count

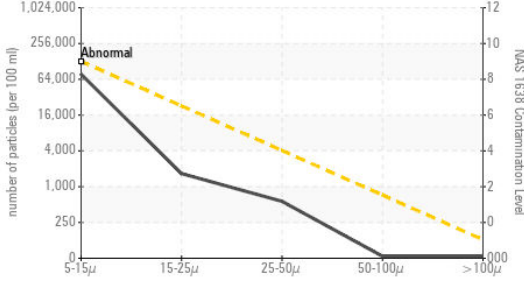

Acid Number

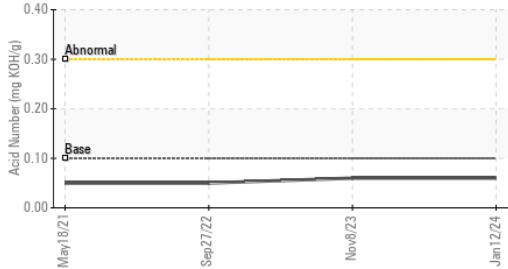

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.1	0.06	0.06	0.05

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	13.2	▲ 11.1	▲ 10.7	▲ 11.4

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

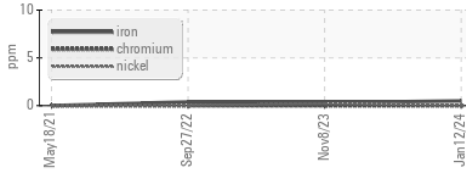


Non-ferrous Metals

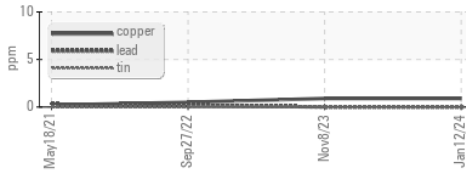


▲ Viscosity @ 40°C

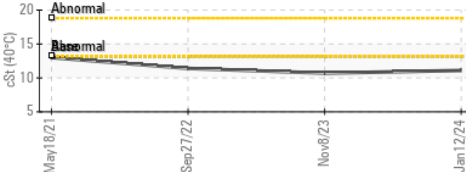

Particle Count

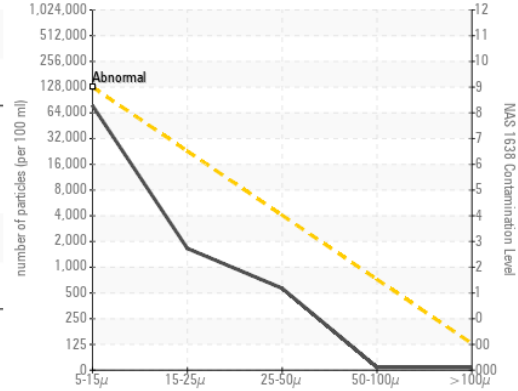

Acid Number

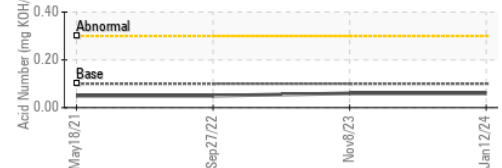

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **SKYSERVICE BUSINESS AVIATION INC**
Sample No. : WC0833068 **Received** : 17 Jan 2024 **6120 MIDFIELD ROAD**
Lab Number : **02609300** **Diagnosed** : 23 Jan 2024 **MISSISSAUGA, ON**
Unique Number : 5710386 **Diagnostician** : Kevin Marson **CA L4W 2P7**
Test Package : AVI 3 (Additional Tests: PrtCount) **Contact: Crew Chief**


To discuss this sample report, contact Customer Service at 1-800-268-2131. **maintenance_yyz@skyservice.com**
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **T: (416)399-4437**
 Validity of results and interpretation are based on the sample and information as supplied. **F:**



FERROGRAPHY REPORT

Area
(T-21914)
 Machine Id
[T-21914] 8589191201
 Component
Hydraulic System
 Fluid
MIL-PRF-5606H (--- GAL)


Magn: 200x Illum: BC

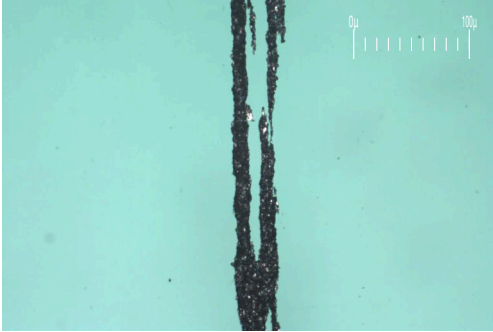

Magn: 50x Illum: RW



Magn: 100x Illum: RW

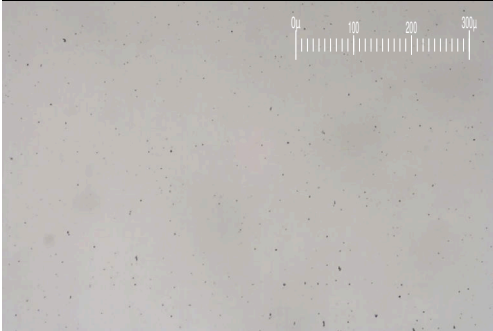


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		8.6	---	2.1
Small Particles		DR-Ferr*		3.2	---	1.7
Total Particles		DR-Ferr*	>---	11.8	---	3.8
Large Particles Percentage	%	DR-Ferr*		45.8	---	10.5
Severity Index		DR-Ferr*		46	---	1

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		3		2
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		2
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1		

WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

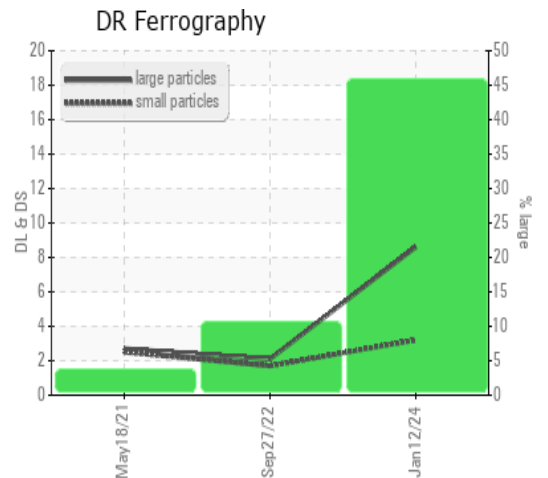

This page left intentionally blank