



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**TOT-231218-7739**

Component  
**Unknown Component**

Fluid  
**VALVOLINE I205 TRACTION OIL (50 GAL)**

## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please provide more complete information on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the sample. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The sample is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0741977</b>	---	---
Sample Date	Client Info	<b>16 Jan 2024</b>	---	---
Machine Age	hrs	<b>7739</b>	---	---
Oil Age	hrs	<b>7739</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	<b>4</b>	---	---
Chromium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	<b>6</b>	---	---
Copper	ppm	ASTM D5185(m)	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	190	<b>182</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)	75	<b>90</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	450	<b>483</b>	---	---
Zinc	ppm	ASTM D5185(m)	10	<b>11</b>	---	---
Sulfur	ppm	ASTM D5185(m)	1250	<b>1342</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

## CONTAMINANTS





method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)		<b>13</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>5</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>1300	<b>▲ 4788</b>	---	---
Particles >6µm	ASTM D7647	>320	<b>▲ 618</b>	---	---
Particles >14µm	ASTM D7647	>80	<b>15</b>	---	---
Particles >21µm	ASTM D7647	>20	<b>2</b>	---	---
Particles >38µm	ASTM D7647	>4	<b>0</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>17/15/13	<b>▲ 19/16/11</b>	---	---



# OIL ANALYSIS REPORT

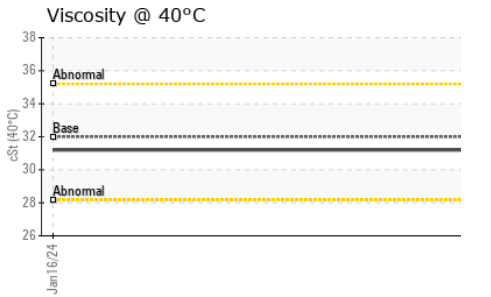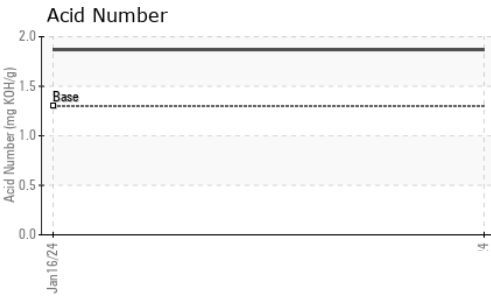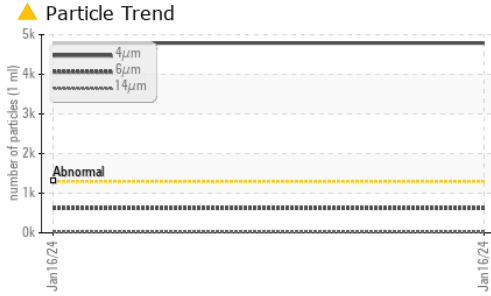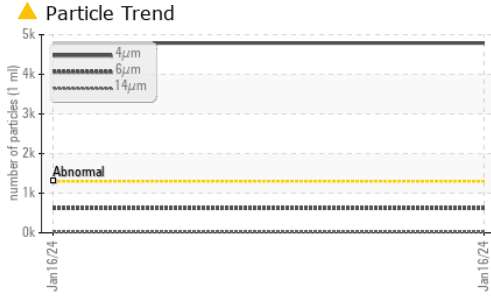

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.3	<b>1.87</b>	---	---




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*		<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	<b>31.2</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			<i>no image</i>	<i>no image</i>
Bottom			<i>no image</i>	<i>no image</i>

### GRAPHS

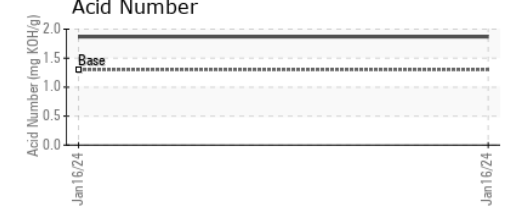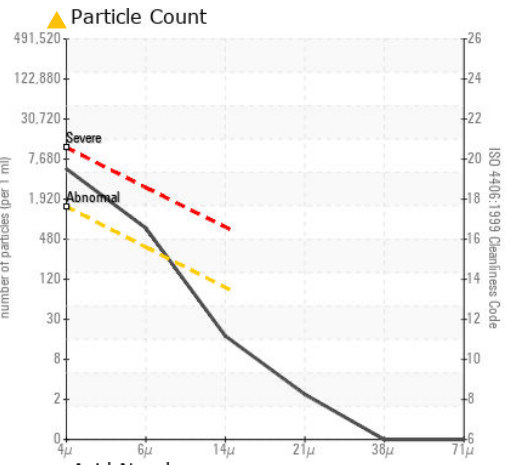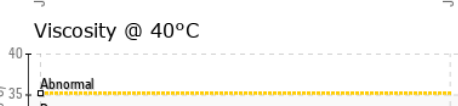

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0741977 **Received** : 17 Jan 2024  
**Lab Number** : **02609323** **Diagnosed** : 18 Jan 2024  
**Unique Number** : 5710409 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: PrtCount, TAN Man )

**CVT Corp.**  
 2101 Nobel, Suite N  
 Sainte-Julie, QC  
 CA J3E 1Z8  
 Contact: Christian McMahon  
 cmcmahon@cvtcorp.com  
 T: (450)922-2225  
 F: (450)922-0335

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.