




# OIL ANALYSIS REPORT

Sample Rating Trend

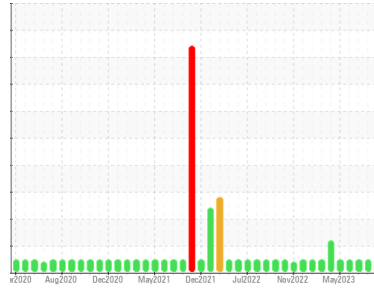

**NORMAL**



Area  
**M11**  
 Machine Id  
**44-P-2540B WATER INJECTION PUMP (44-T-2550B) (S/N Maint Plan 22480)**  
 Component  
**Pump**  
 Fluid  
**MOBIL DTE 832 (2271 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PP</b>	PP	PP
Sample Date	Client Info	<b>19 Dec 2023</b>	14 Nov 2023	11 Sep 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >75	<b>0</b>	<1	<1
Chromium	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m)	<b>0</b>	0	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185(m) >5	<b>&lt;1</b>	<1	<1
Lead	ppm ASTM D5185(m) >10	<b>0</b>	0	0
Copper	ppm ASTM D5185(m) >15	<b>0</b>	<1	<1
Tin	ppm ASTM D5185(m)	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>0</b>	0	<1
Barium	ppm ASTM D5185(m)	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	0
Calcium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Phosphorus	ppm ASTM D5185(m)	<b>1191</b>	1157	1201
Zinc	ppm ASTM D5185(m)	<b>2</b>	2	2
Sulfur	ppm ASTM D5185(m)	<b>2</b>	18	22
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS





method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	<b>0</b>	0	3
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	0	<1
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	<1

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>2054</b>	4916	1218
Particles >6µm	ASTM D7647 >1300	<b>389</b>	1146	355
Particles >14µm	ASTM D7647 >160	<b>26</b>	37	26
Particles >21µm	ASTM D7647 >40	<b>10</b>	8	6
Particles >38µm	ASTM D7647 >10	<b>1</b>	2	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	2	1
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>18/16/12</b>	19/17/12	17/16/12



# OIL ANALYSIS REPORT

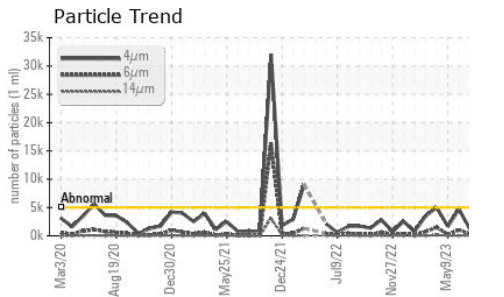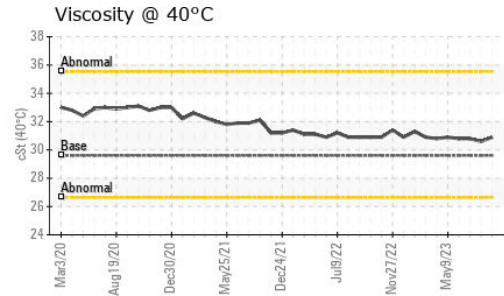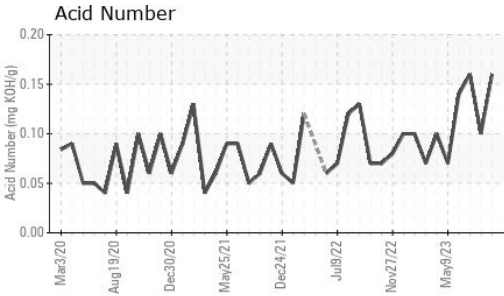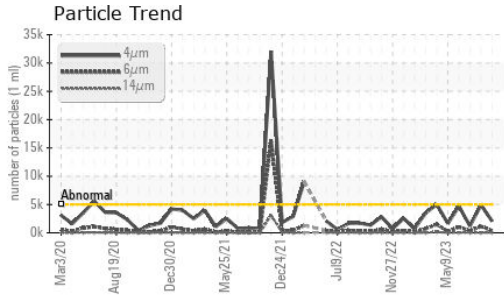


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.16</b>	0.10	0.16






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	29.6	<b>30.9</b>	30.6	30.8

### SAMPLE IMAGES

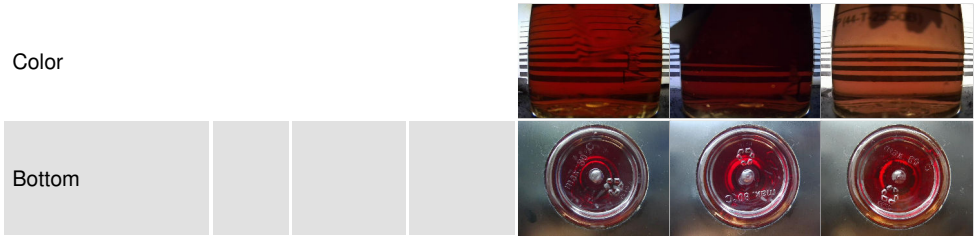

### GRAPHS

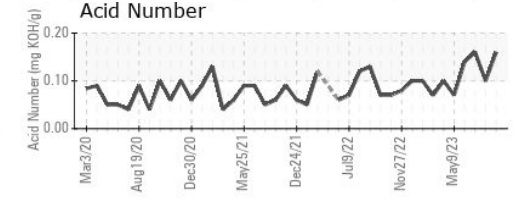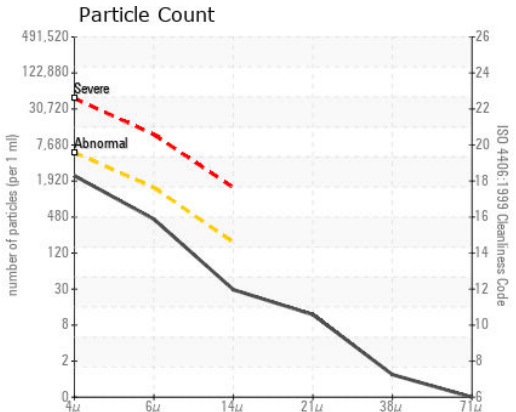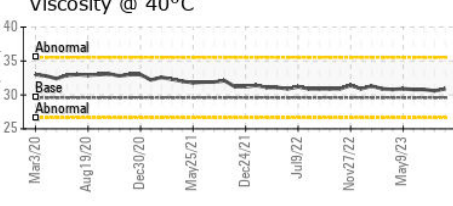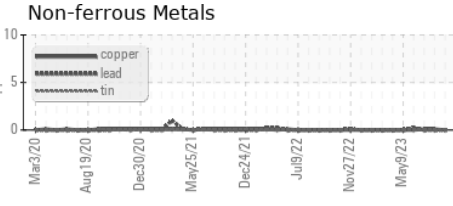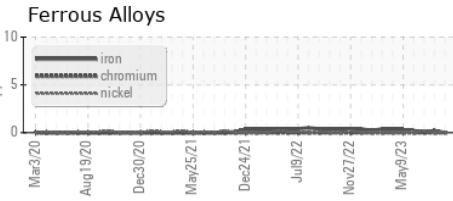

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 HUSKY SEA ROSE /AKER SOLUTIONS  
**Sample No.** : PP **Received** : 17 Jan 2024  
**Lab Number** : 02609339 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 5710425 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Maintenance Supervisor  
 maintsuper.searose@huskyenergy.ca  
 T: x:  
 F: x: