


OIL ANALYSIS REPORT

Mako Plastics - 888067 **AG233**

Component **Hydraulic System**

AW HYDRAULIC OIL ISO 46 (--- LTR)





| D | IΑ | GI | V | O | SI | S |
|---|----|----|---|---|----|---|
| | | | | | | |

Recommendation

This is a baseline read-out on the submitted sample.

Wear

{not applicable}

Contamination

Water and ppm water contamination levels are abnormal. Particles >4µm are abnormally high. Particles >6µm and oil cleanliness are abnormally high. Silicon ppm levels are notably high.

Fluid Condition

{not applicable}

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|------------------|--------|-------------|------------|-------------|----------|----------|
| Machine ID | | Client Info | | Tote 2 | | |
| Department | | Client Info | | Sales | | |
| Sample From | | Client Info | | Tote | | |
| Production Stage | | Client Info | | Initial | | |
| Sent to WC | | Client Info | | 01/15/2024 | | |
| Sample Number | | Client Info | | E30001147 | | |
| Sample Date | | Client Info | | 11 Jan 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |


| WEAR METALS | | metnoa | ilmit/base | current | nistory i | nistory2 |
|-------------|-----|---------------|------------|---------|-----------|----------|
| Iron | ppm | ASTM D5185(m) | >20 | 9 | | |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | | |
| Nickel | ppm | ASTM D5185(m) | >20 | <1 | | |
| Titanium | ppm | ASTM D5185(m) | | <1 | | |
| Silver | ppm | ASTM D5185(m) | | 0 | | |
| Aluminum | ppm | ASTM D5185(m) | >20 | 2 | | |
| Lead | ppm | ASTM D5185(m) | >20 | 2 | | |
| Copper | ppm | ASTM D5185(m) | >20 | 8 | | |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | | |
| Antimony | ppm | ASTM D5185(m) | | 0 | | |
| Vanadium | ppm | ASTM D5185(m) | | 0 | | |
| Beryllium | ppm | ASTM D5185(m) | | 0 | | |
| Cadmium | ppm | ASTM D5185(m) | | <1 | | |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|---------|----------|----------|
| Boron | ppm | ASTM D5185(m) | 5 | <1 | | |
| Barium | ppm | ASTM D5185(m) | 5 | 0 | | |
| Molybdenum | ppm | ASTM D5185(m) | 5 | 0 | | |
| Manganese | ppm | ASTM D5185(m) | | 0 | | |
| Magnesium | ppm | ASTM D5185(m) | 25 | 2 | | |
| Calcium | ppm | ASTM D5185(m) | 200 | 42 | | |
| Phosphorus | ppm | ASTM D5185(m) | 300 | 332 | | |
| Zinc | ppm | ASTM D5185(m) | 370 | 358 | | |
| Sulfur | ppm | ASTM D5185(m) | 2500 | 1003 | | |
| Lithium | ppm | ASTM D5185(m) | | <1 | | |
| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |

| CONTAMINANTS | 3 | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|----------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >15 | 1 0 | | |
| Sodium | ppm | ASTM D5185(m) | | 3 | | |
| Potassium | ppm | ASTM D5185(m) | >20 | 2 | | |
| Water | % | ASTM D6304* | >0.05 | △ 0.327 | | |
| ppm Water | ppm | ASTM D6304* | >500 | ▲ 3273 | | |



OIL ANALYSIS REPORT

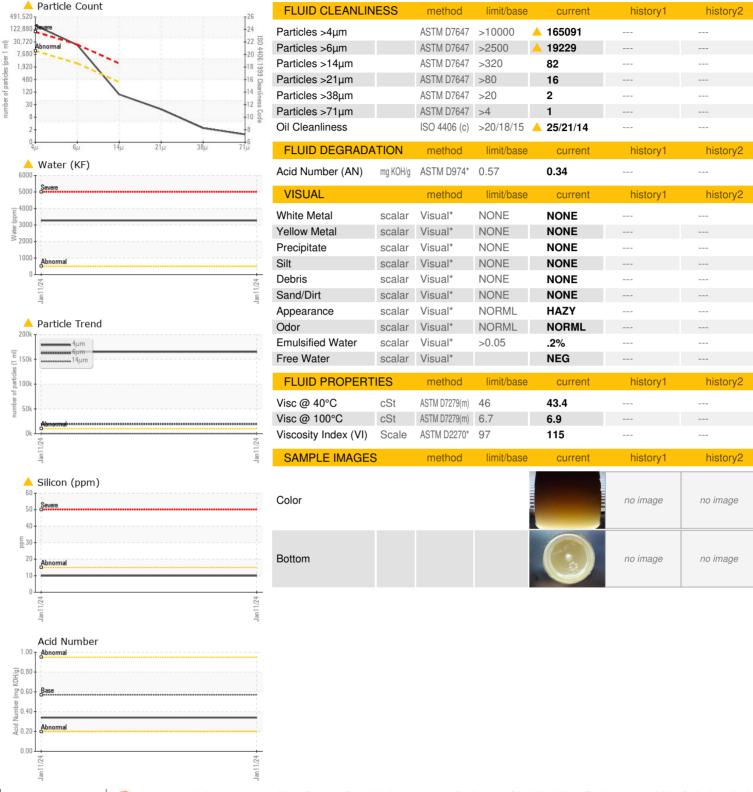



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: E30001147

: 5710489

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Recieved +02609403

Diagnosed Diagnostician

: 19 Jan 2024 : Tatiana Sorkina

: 17 Jan 2024

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON **CA K9A 5H5** Contact: Tatiana Sorkina

tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950