




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

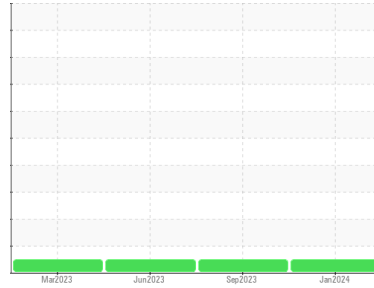

Area
PRESS 3/Press 8
Machine Id
SMS Extrusion Press (S/N #8)
Component
Hydraulic Extruder
Fluid
PETRO CANADA HYDREX AW 46 (20000 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed).

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0828662	WC0828648	WC0796104
Sample Date	Client Info		16 Jan 2024	20 Sep 2023	12 Jun 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	<1
Chromium	ppm	ASTM D5185(m)	>20	0	0
Nickel	ppm	ASTM D5185(m)	>20	<1	0
Titanium	ppm	ASTM D5185(m)		0	0
Silver	ppm	ASTM D5185(m)		0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	0
Lead	ppm	ASTM D5185(m)	>20	2	2
Copper	ppm	ASTM D5185(m)	>20	16	15
Tin	ppm	ASTM D5185(m)	>20	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0
Vanadium	ppm	ASTM D5185(m)		0	0
Beryllium	ppm	ASTM D5185(m)		0	0
Cadmium	ppm	ASTM D5185(m)		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	0	<1
Barium	ppm	ASTM D5185(m)	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	2	1
Calcium	ppm	ASTM D5185(m)	50	59	55
Phosphorus	ppm	ASTM D5185(m)	330	332	352
Zinc	ppm	ASTM D5185(m)	430	408	426
Sulfur	ppm	ASTM D5185(m)	760	784	746
Lithium	ppm	ASTM D5185(m)		<1	<1

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	0
Sodium	ppm	ASTM D5185(m)		0	<1
Potassium	ppm	ASTM D5185(m)	>20	1	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	900	1385	3243
Particles >6µm	ASTM D7647	>1300	241	376	295
Particles >14µm	ASTM D7647	>160	23	40	13
Particles >21µm	ASTM D7647	>40	7	12	3
Particles >38µm	ASTM D7647	>10	2	1	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/12	18/16/12	19/15/11



OIL ANALYSIS REPORT

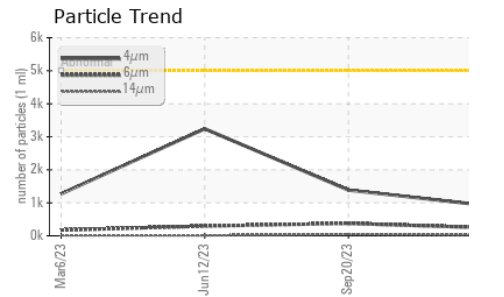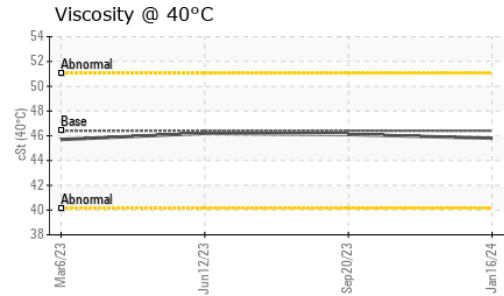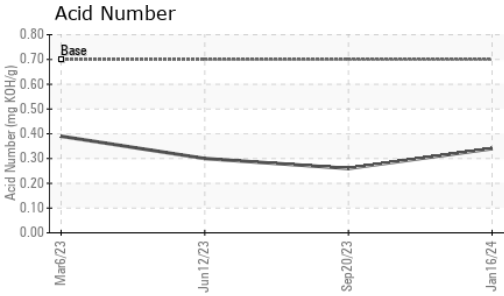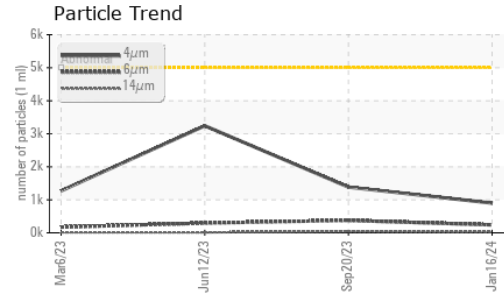


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	0.34	0.26	0.30


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	45.8	46.1	46.2

SAMPLE IMAGES

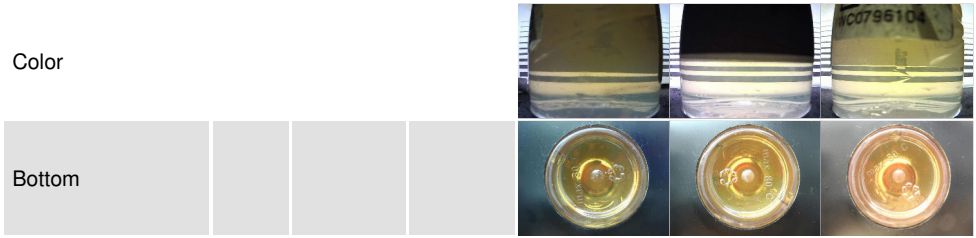

GRAPHS

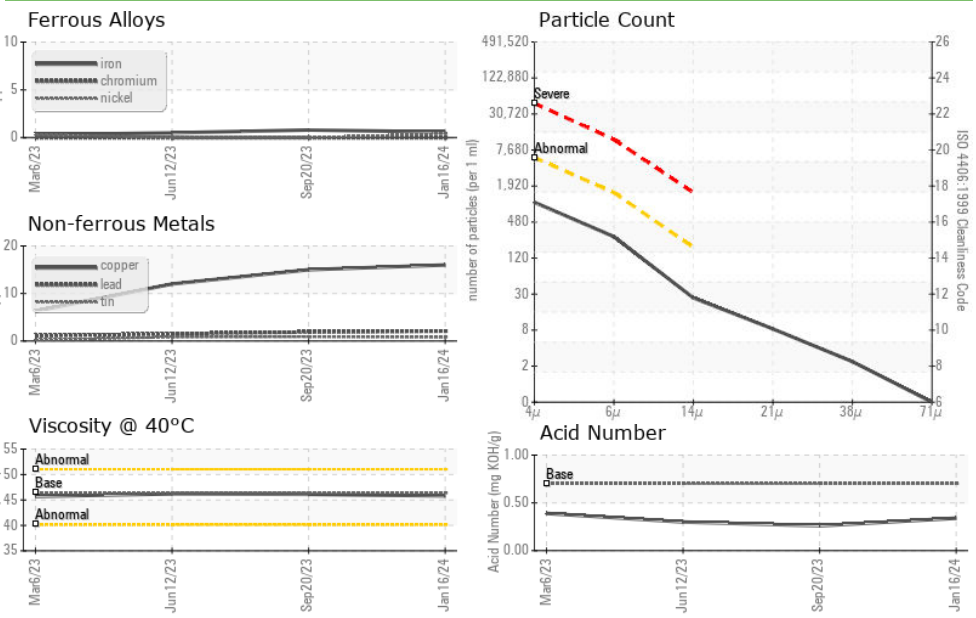

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **CAN ART ALUMINUM EXTRUSION INC**
Sample No. : WC0828662 **Received** : 18 Jan 2024 **428 JUTRAS DRIVE SOUTH**
Lab Number : **02609705** **Diagnosed** : 19 Jan 2024 **TECUMSEH, ON**
Unique Number : 5710791 **Diagnostician** : Kevin Marson **CA N8N 5C5**
Test Package : IND 2 (Additional Tests: TAN Man) **Contact: Angelo Bertoia**
To discuss this sample report, contact Customer Service at 1-800-268-2131. **angelo@canart.com**
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **T: (519)727-4399**
Validity of results and interpretation are based on the sample and information as supplied. **F: (519)727-6434**