




# OIL ANALYSIS REPORT

Sample Rating Trend

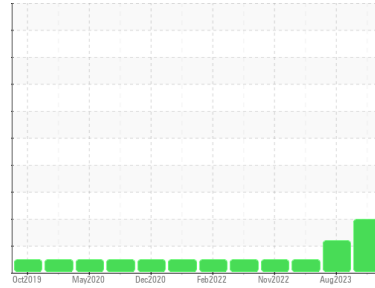

**WEAR**



Machine Id  
**9548**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

Iron ppm levels are abnormal. Cylinder, crank, or cam shaft wear is indicated.

### Contamination

Light fuel dilution occurring.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0853257</b>	WC0702956	WC0796243
Sample Date	Client Info		<b>08 Dec 2023</b>	06 Aug 2023	22 Apr 2023
Machine Age	kms	Client Info	<b>387689</b>	354430	338484
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >100	<b>▲ 101</b>	50	34
Chromium	ppm	ASTM D5185(m) >20	<b>3</b>	2	1
Nickel	ppm	ASTM D5185(m) >4	<b>1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m) >20	<b>13</b>	9	11
Lead	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m) >330	<b>7</b>	4	5
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	<b>17</b>	25	28
Barium	ppm	ASTM D5185(m) 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 100	<b>2</b>	2	4
Manganese	ppm	ASTM D5185(m)	<b>1</b>	1	<1
Magnesium	ppm	ASTM D5185(m) 450	<b>744</b>	743	718
Calcium	ppm	ASTM D5185(m) 3000	<b>1359</b>	1466	1389
Phosphorus	ppm	ASTM D5185(m) 1150	<b>706</b>	744	709
Zinc	ppm	ASTM D5185(m) 1350	<b>788</b>	806	758
Sulfur	ppm	ASTM D5185(m) 4250	<b>2621</b>	2496	2492
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>10</b>	8	9
Sodium	ppm	ASTM D5185(m) >158	<b>6</b>	4	3
Potassium	ppm	ASTM D5185(m) >20	<b>12</b>	8	12
Fuel	%	ASTM D7593* >5	<b>▲ 3.8</b>	▲ 2.5	<1.0
Glycol	%	ASTM D7922*	<b>0.0</b>	NEG	NEG


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>1.1</b>	0.6	0.7
Nitration	Abs/cm	ASTM D7624* >20	<b>15.9</b>	12.3	13.4
Sulfation	Abs.1mm	ASTM D7415* >30	<b>30.9</b>	25.5	26.1



# OIL ANALYSIS REPORT

### ▲ Ferrous Alloys

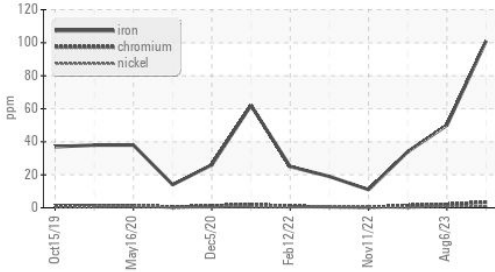

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	21.1	21.2

### VISUAL


method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG
scalar	Visual*	NEG	NEG	NEG

### FLUID PROPERTIES


method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	14.4	11.3	11.0

### GRAPHS


### ● Glycol Contamination

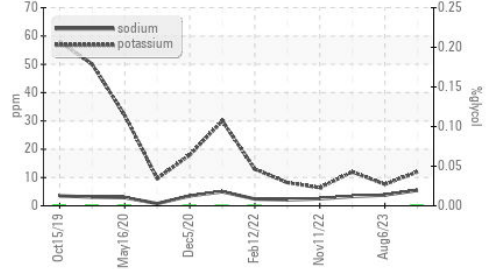


### ▲ Iron (ppm)

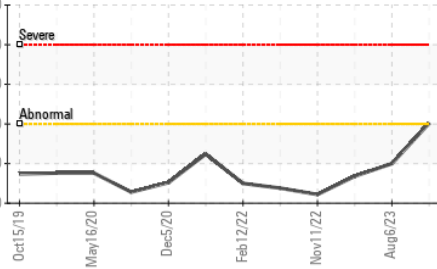


### Lead (ppm)

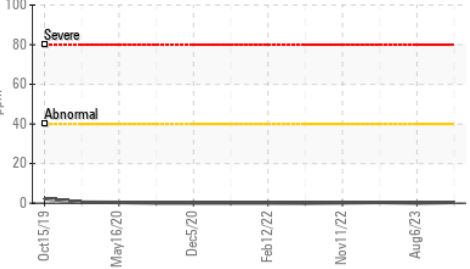


### ● PQ

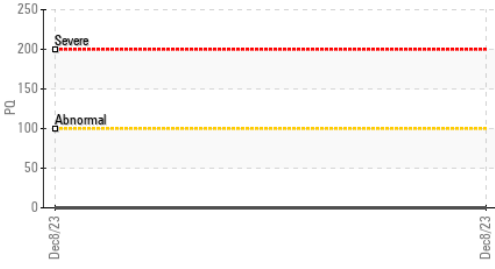


### Aluminum (ppm)

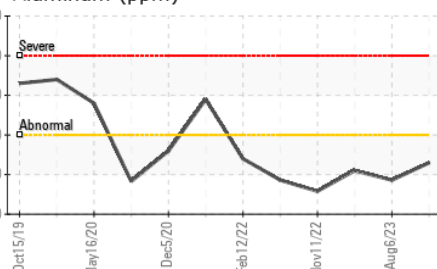


### Chromium (ppm)

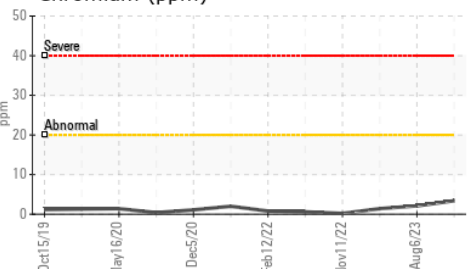


### ● Glycol Contamination

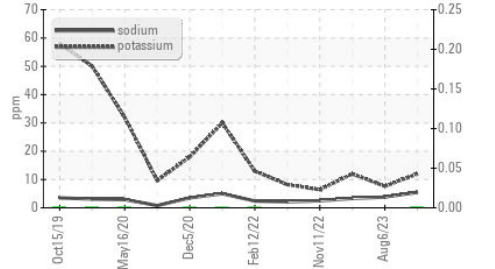


### Copper (ppm)

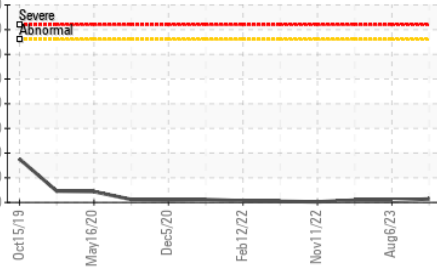


### Silicon (ppm)

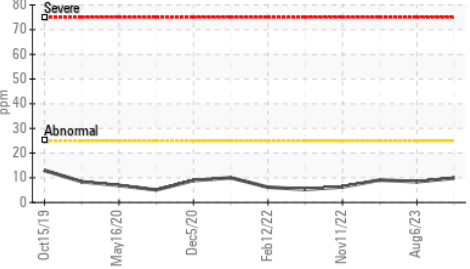


### ● PQ

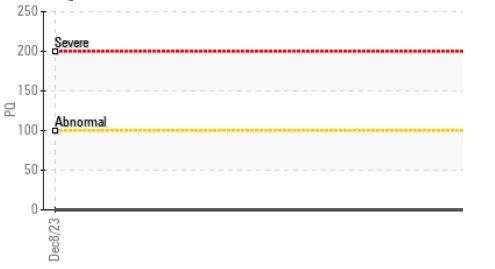

### ▲ Viscosity @ 100°C

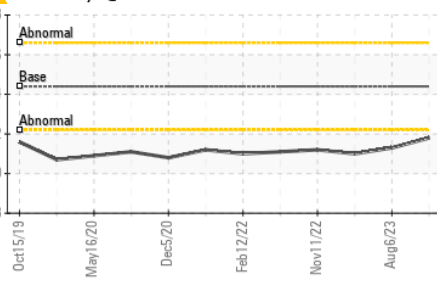

### ▲ Fuel Dilution

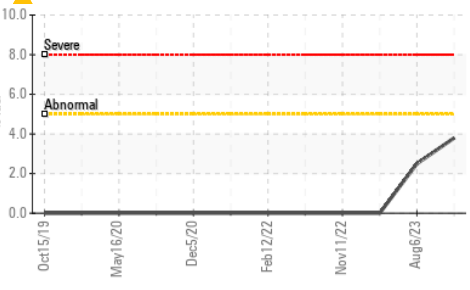

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0853257 **Received** : 19 Jan 2024  
**Lab Number** : 02609838 **Diagnosed** : 22 Jan 2024  
**Unique Number** : 5710924 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, Glycol, PercentFuel, PQ )

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.