




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

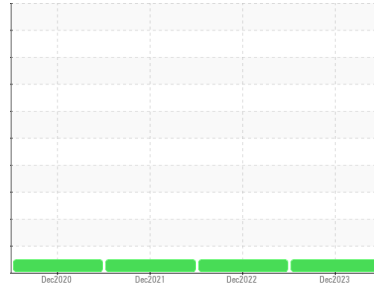

Area  
**TORONTO CONDO CORP [150253]**  
 Machine Id  
**79447522**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>CU0022296</b>	CU0020556	CU0017613
Sample Date	Client Info			<b>06 Dec 2023</b>	21 Dec 2022	14 Dec 2021
Machine Age	hrs	Client Info		<b>305</b>	275	249
Oil Age	hrs	Client Info		<b>1</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>2</b>	2	2
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	39	<b>40</b>	40	40
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	49	<b>46</b>	43	41
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	616	<b>790</b>	735	739
Calcium	ppm	ASTM D5185(m)	1554	<b>1155</b>	1298	1184
Phosphorus	ppm	ASTM D5185(m)	899	<b>715</b>	793	728
Zinc	ppm	ASTM D5185(m)	1069	<b>800</b>	833	818
Sulfur	ppm	ASTM D5185(m)	2624	<b>2051</b>	2102	1968
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	4	6
Sodium	ppm	ASTM D5185(m)		<b>3</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.5</b>	6.8	6.0
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>20.3</b>	21.5	21.1



# OIL ANALYSIS REPORT

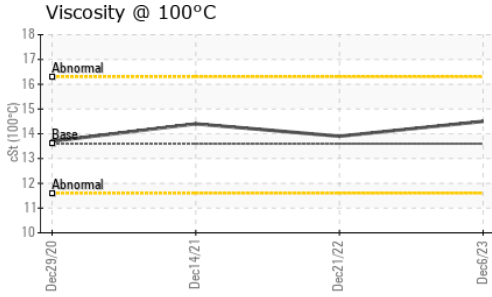

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	17.3	15.9









### VISUAL

method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG
scalar	Visual*	NEG	NEG	NEG

### FLUID PROPERTIES

method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	13.6	13.9	14.4

### GRAPHS

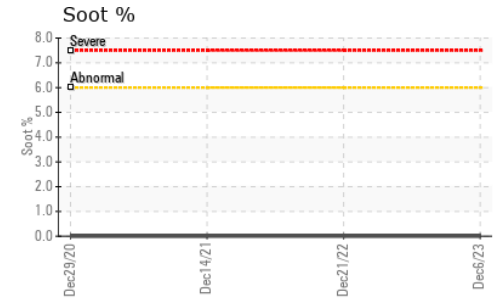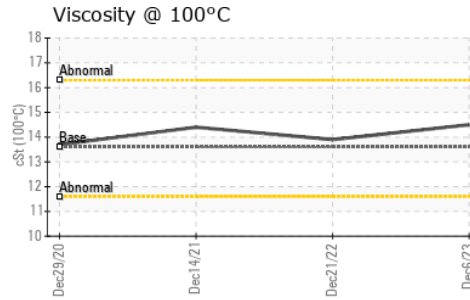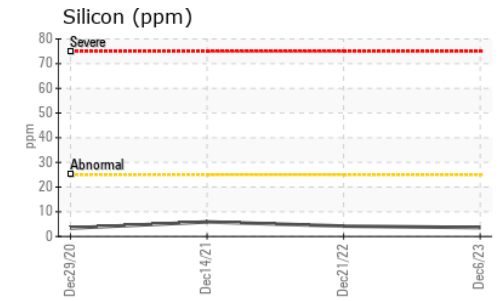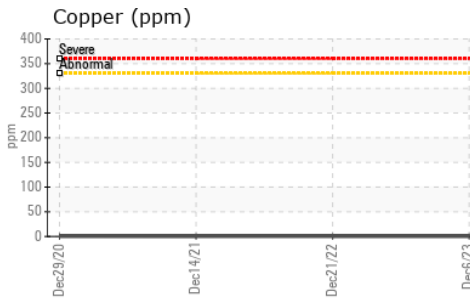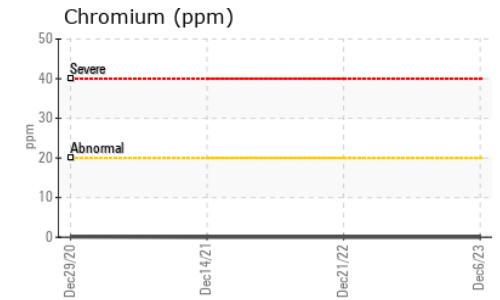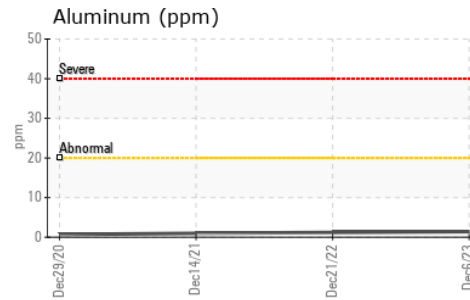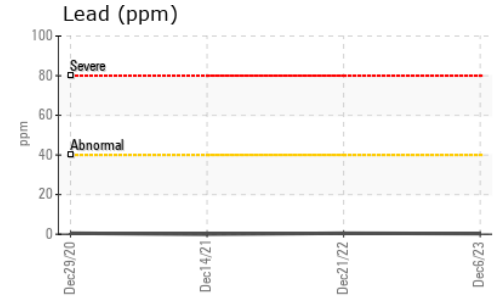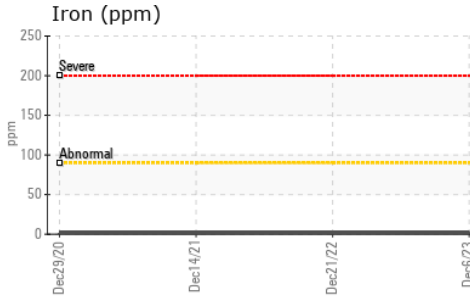

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CUMMINS CANADA ULC - GENERATOR DIVISION  
**Sample No.** : CU0022296 **Received** : 19 Jan 2024  
**Lab Number** : 02609910 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 5710996 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

7175 PACIFIC CIRCLE  
 MISSISSAUGA, ON  
 CA L5T 2A5  
 Contact: Elisia Johnson  
 elisia.johnson@cummins.com  
 T: (905)795-0050  
 F: (905)795-9252