




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

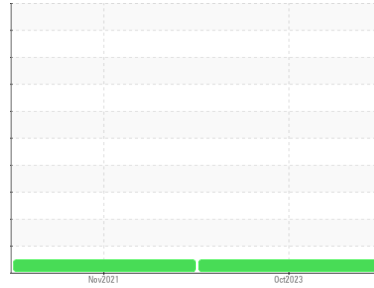

Machine Id  
**7470**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0853443</b>	WC0625026	---
Sample Date	Client Info			<b>31 Oct 2023</b>	10 Nov 2021	---
Machine Age	kms	Client Info		<b>137740</b>	39008	---
Oil Age	kms	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>Not Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	0.5	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>165	<b>21</b>	68	---
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	24	---
Lead	ppm	ASTM D5185(m)	>150	<b>3</b>	4	---
Copper	ppm	ASTM D5185(m)	>90	<b>2</b>	27	---
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	3	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>32</b>	50	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	5	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>5</b>	58	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	4	---
Magnesium	ppm	ASTM D5185(m)	450	<b>646</b>	445	---
Calcium	ppm	ASTM D5185(m)	3000	<b>1287</b>	1624	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>647</b>	989	---
Zinc	ppm	ASTM D5185(m)	1350	<b>722</b>	1160	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2443</b>	2479	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>35	<b>5</b>	38	---
Sodium	ppm	ASTM D5185(m)	>75	<b>2</b>	5	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	80	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>7.5	<b>0.1</b>	0	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.6</b>	8.1	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.7</b>	22.3	---











# OIL ANALYSIS REPORT

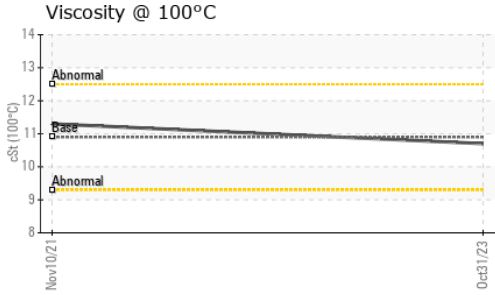

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>26.7</b>	17.5	---
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>10.7</b>	11.3	---

## GRAPHS

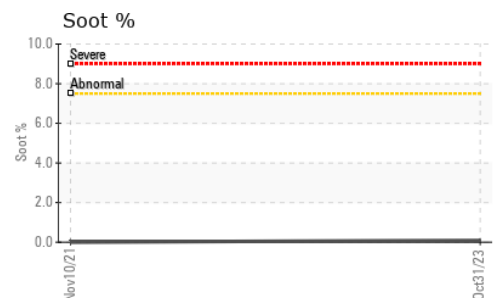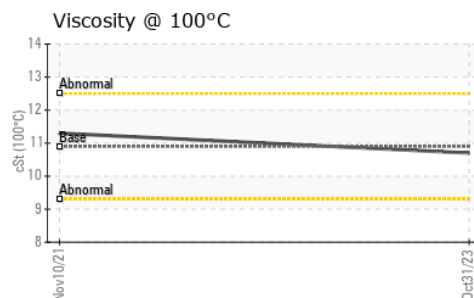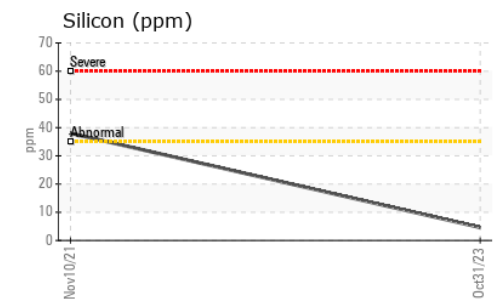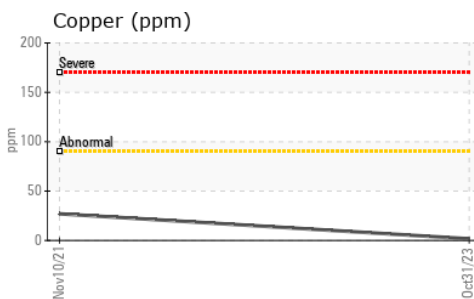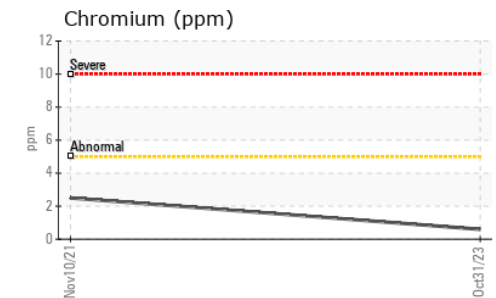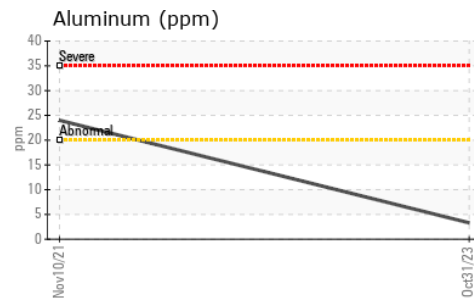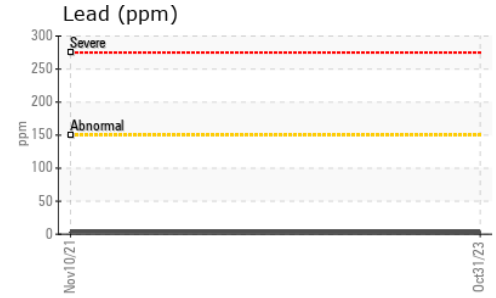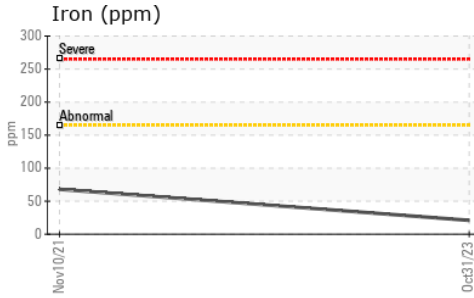

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0853443      **Received** : 19 Jan 2024  
**Lab Number** : **02609914**      **Diagnosed** : 19 Jan 2024  
**Unique Number** : 5711000      **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.