


OIL ANALYSIS REPORT







Machine Id Component **Hydraulic System**

SMITH FUELS AW 32 (5000 LTR)

וט	A١	Ġľ	ИO	SI	S

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan2024		
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0712438		
Sample Date		Client Info		16 Jan 2024		
Machine Age	yrs	Client Info		0		
Oil Age	yrs	Client Info		2		
Oil Changed		Client Info		Filtered		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
_ead	ppm	ASTM D5185(m)	>10	<1		
Copper	ppm	ASTM D5185(m)	>75	1		
Γin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		7		
Calcium	ppm	ASTM D5185(m)		29		
Phosphorus	ppm	ASTM D5185(m)		336		
Zinc	ppm	ASTM D5185(m)		401		
Sulfur	ppm	ASTM D5185(m)		826		
_ithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185(m)	>20	0		
Sodium	ppm		>20	0		
Sodium Potassium	ppm	ASTM D5185(m) ASTM D5185(m)	>20	0 <1		
	ppm					
FLUID CLEANLIN	VESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1868		
Particles >6µm		ASTM D7647	>1300	105		
Particles >14µm		ASTM D7647	>160	5		
Particles >21µm		ASTM D7647	>40	1		
			. 10	^		
Particles >38µm		ASTM D7647	>10	0		
Particles >38µm Particles >71µm Dil Cleanliness		ASTM D7647 ASTM D7647 ISO 4406 (c)	>10 >3 >19/17/14	0 0 18/14/10		



OIL ANALYSIS REPORT

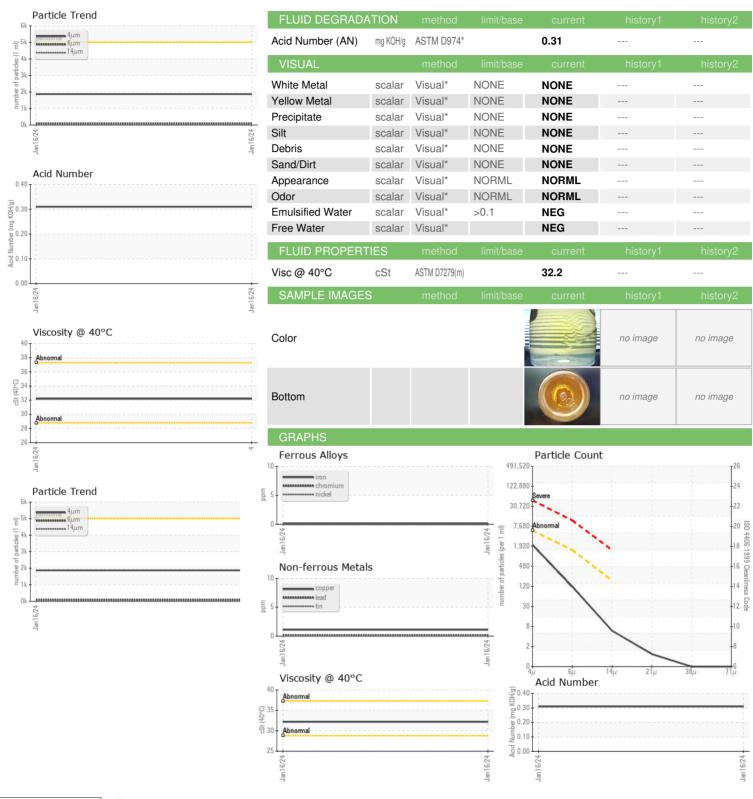



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WC0712438 : 02609970

: 5711056 Test Package : IND 2

Recieved : 19 Jan 2024 Diagnosed Diagnostician

: 22 Jan 2024 : Wes Davis

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 MAX DIE GROUP - SIGMA ENGINEERING 5101 URE STREET OLD CASTLE, ON **CA N9G 0B8** Contact: Kevin Glasier kglasier@maxdie.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T:

F: