




OIL ANALYSIS REPORT

Sample Rating Trend

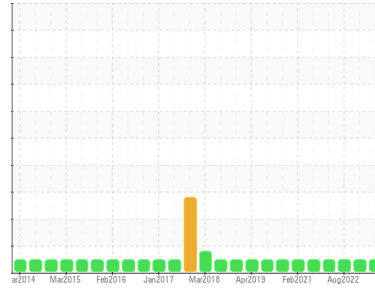

NORMAL



Machine Id
NOVA 60060
 Component
Rear Diesel Engine
 Fluid
VALVOLINE 15W40 (24 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0887278	WC0734918	WC0700639
Sample Date	Client Info		11 Jan 2024	07 Dec 2022	09 Aug 2022
Machine Age	kms	Client Info	600879	557703	535081
Oil Age	kms	Client Info	10000	10000	10000
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	22	17	22
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>15	3	2	3
Lead	ppm	ASTM D5185(m)	>25	<1	<1	2
Copper	ppm	ASTM D5185(m)	>100	4	3	4
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Antimony	ppm	ASTM D5185(m)		0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	39	4	4	1
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	49	60	60	61
Manganese	ppm	ASTM D5185(m)	1	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	616	987	994	1040
Calcium	ppm	ASTM D5185(m)	1554	1139	1141	1150
Phosphorus	ppm	ASTM D5185(m)	899	1022	1095	1047
Zinc	ppm	ASTM D5185(m)	1069	1228	1244	1278
Sulfur	ppm	ASTM D5185(m)	2624	2638	2527	2462
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	6	5	6
Sodium	ppm	ASTM D5185(m)		6	7	10
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	0.4	0.4	0.4
Nitration	Abs/cm	ASTM D7624*	>20	10.6	10.5	10.3
Sulfation	Abs./1mm	ASTM D7415*	>30	22.1	23.3	22.2











OIL ANALYSIS REPORT

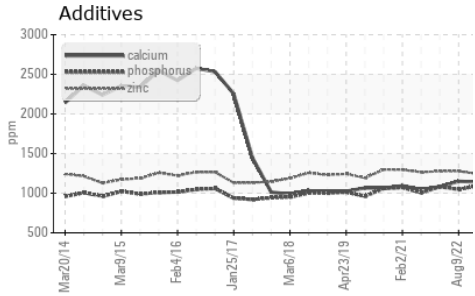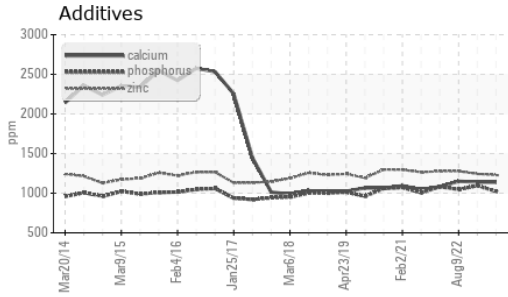

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.5	20.9	20.1
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	14.1	13.4	13.9

GRAPHS

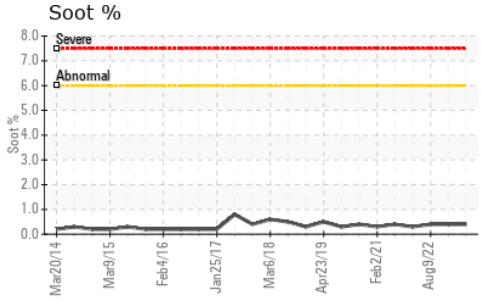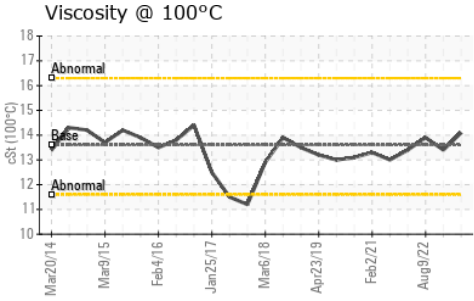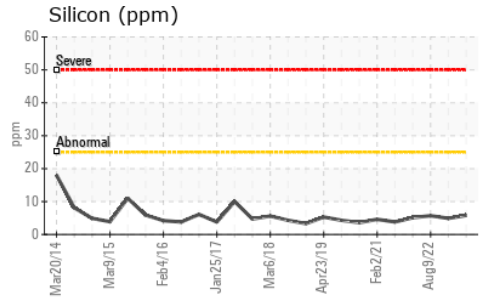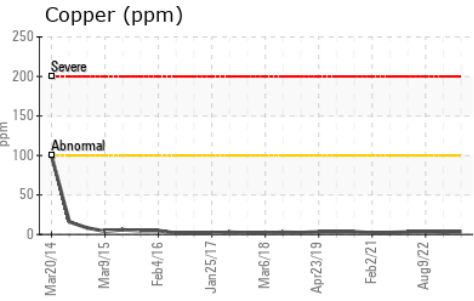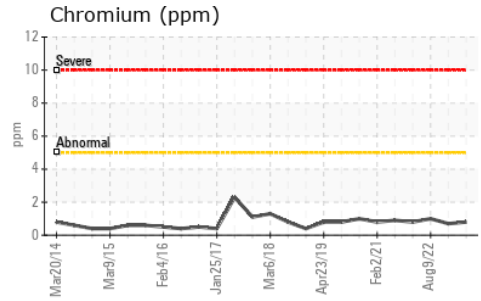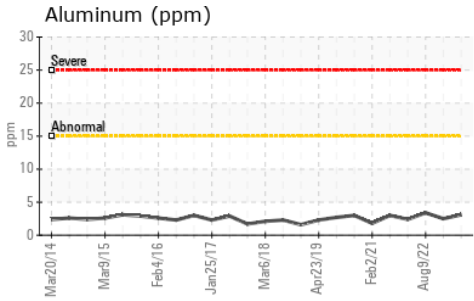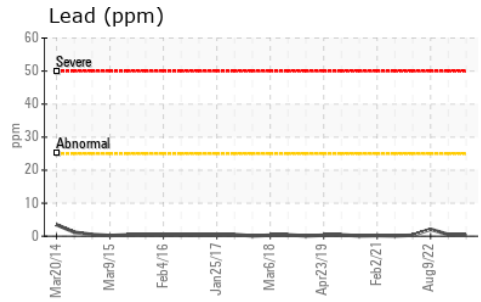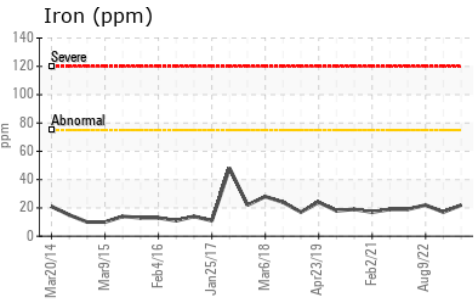

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0887278
Lab Number : **02610134**
Unique Number : 5711220
Test Package : MOB 1
Received : 22 Jan 2024
Diagnosed : 22 Jan 2024
Diagnostician : Wes Davis

CITY OF PETERBOROUGH
 791 WEBBER AVENUE., MUNICIPAL OPERATIONS CENTRE
 PETERBOROUGH, ON
 CA K9J 8N3
 Contact: Frank Curran
 fcurran@peterborough.ca
 T: (705)742-7777
 F: (705)743-3223

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.