

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

T001407 (S/N 24-M-01-2593)

Hydraulic System

PETRO CANADA HYDREX XV ALL SEASON H

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition


The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

) 						
YDRAULIC OIL (
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0848445		
Sample Date		Client Info		18 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1		
Barium	ppm	ASTM D5185(m)	0	<1		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)	1	0		
Magnesium	ppm	ASTM D5185(m)	0	1		
Calcium	ppm	ASTM D5185(m)	100	113		
Phosphorus	ppm	ASTM D5185(m)	670	699		
Zinc	ppm	ASTM D5185(m)	850	897		
Sulfur	ppm	ASTM D5185(m)	1600	1719		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2		

Lithium	ppm	ASTM D5185(m)		<	1		
CONTAMINANTS		method	limit/base		current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2	2		
Sodium	ppm	ASTM D5185(m)		0)		
Potassium	ppm	ASTM D5185(m)	>20	<	:1		
FLUID CLEANLIN	ESS	method	limit/base		current	history1	history2
Particles >4µm		ASTM D7647	>5000	<u>^</u> 2	23250		
Particles >6µm		ASTM D7647	>1300	<u> </u>	1631		
Particles >14μm		ASTM D7647	>160	1	194		
Particles >21µm		ASTM D7647	>40	▲ 6	64		
Particles >38μm		ASTM D7647	>10	5	5		
Particles >71μm		ASTM D7647	>3	1			
Oil Cleanliness 9:45:43) Rev: 1		ISO 4406 (c)	>19/17/14		2 2/19/15 Contact/Loca	 ation: Tami Arno	Id - RWFWOO



OIL ANALYSIS REPORT

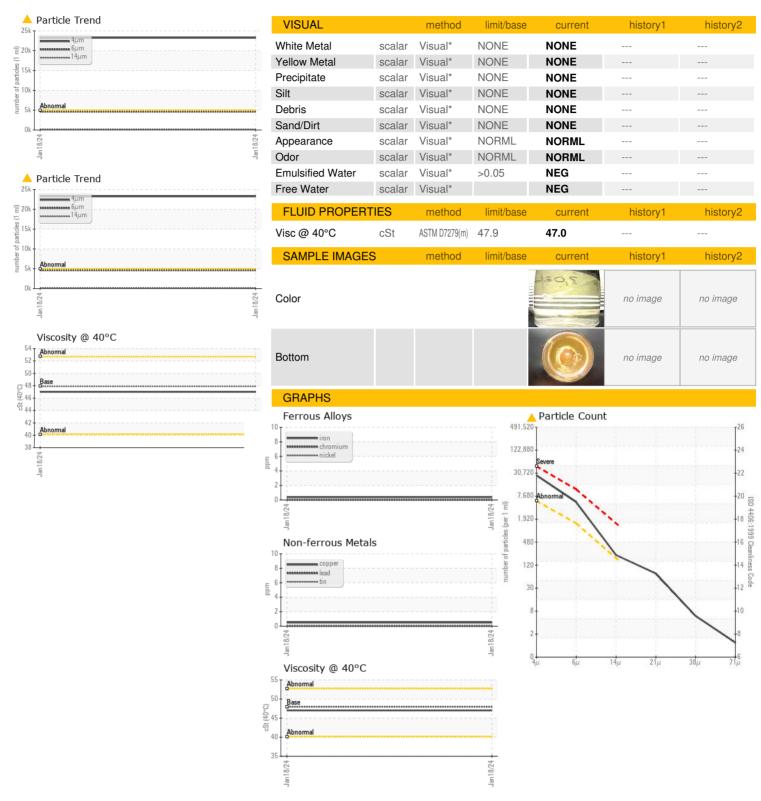



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number

: WC0848445 : 02610303 : 5711389 Test Package : MOB 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Recieved Diagnosed Diagnostician

: 22 Jan 2024 : 23 Jan 2024 : Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

RWF Industries 873 Devonshire Ave. Woodstock, ON **CA N4S 8Z4** Contact: Tami Arnold tamia@rwfbron.com

F: (519)421-0028

T: