




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**John Deere 210G JM210G**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 46 (--- LTR)**

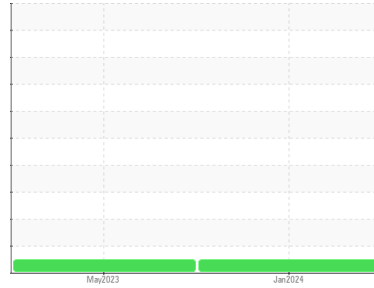

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0818955</b>	WC0818949	---
Sample Date	Client Info		<b>10 Jan 2024</b>	12 May 2023	---
Machine Age	hrs	Client Info	<b>5619</b>	5228	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<b>16</b>	11	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m) >10	<b>4</b>	3	---
Lead	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185(m) >75	<b>3</b>	2	---
Tin	ppm	ASTM D5185(m) >10	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	---

## ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185(m) 5	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m) 25	<b>&lt;1</b>	<1	---
Calcium	ppm	ASTM D5185(m) 200	<b>5</b>	2	---
Phosphorus	ppm	ASTM D5185(m) 300	<b>514</b>	554	---
Zinc	ppm	ASTM D5185(m) 370	<b>65</b>	41	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>201</b>	182	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	1	---
Sodium	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Potassium	ppm	ASTM D5185(m) >20	<b>3</b>	0	---




# OIL ANALYSIS REPORT

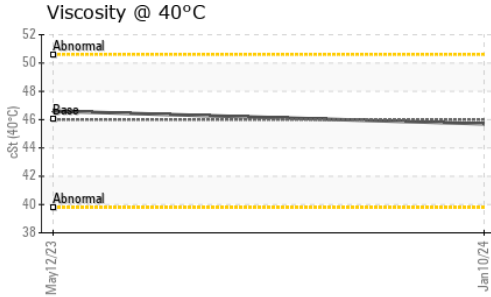









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	45.7	46.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

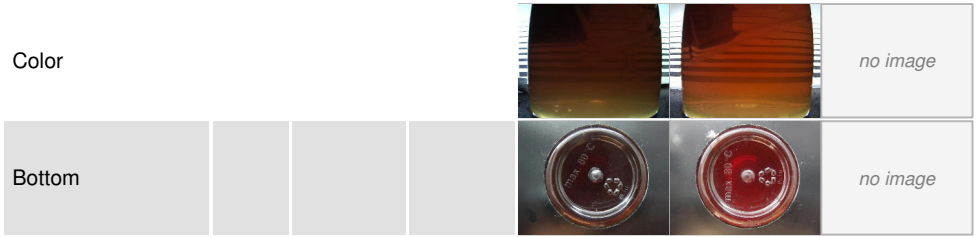

## GRAPHS

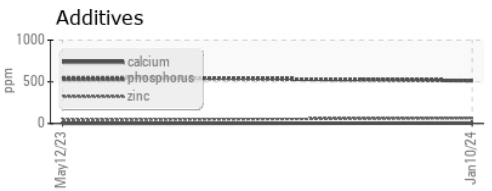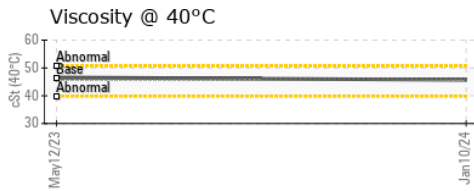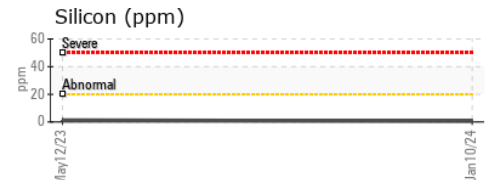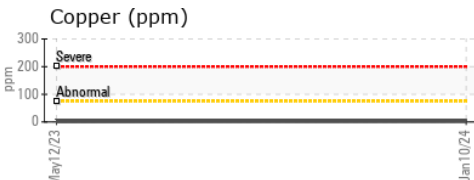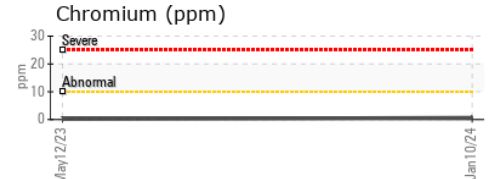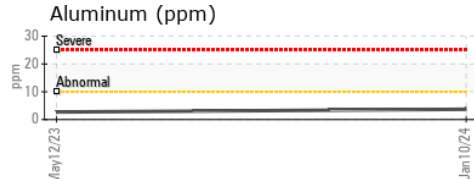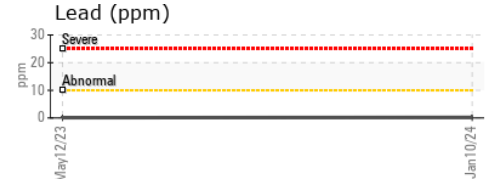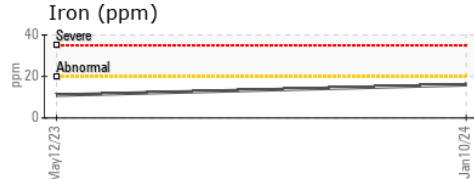

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0818955 **Received** : 22 Jan 2024  
**Lab Number** : 02610341 **Diagnosed** : 23 Jan 2024  
**Unique Number** : 5711427 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 1

**JD MOBILE REPAIR SERVICE**  
 183841 GREY ROAD #9  
 HOLSTEIN, ON  
 CA N0G 2A0  
 Contact: John Dowling  
 dozerdoctor@hotmail.com  
 T: (519)604-8247  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.