

OIL ANALYSIS REPORT

Machine Id AG236-R

Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS


Recommendation

This is a baseline read-out on the submitted sample.

Wear {not applicable}

Contamination {not applicable}

Fluid Condition {not applicable}






NORMAL


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Machine ID		Client Info		Tosh. Inj. Moul		
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage		Client Info		Lab Reclaim		
Sent to WC		Client Info		01/19/2024		
Sample Number		Client Info		E30001209		
Sample Date		Client Info		19 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	5		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	6		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	1		
Barium	ppm	ASTM D5185(m)	5	0		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	4		
Calcium	ppm	ASTM D5185(m)	200	61		
Phosphorus	ppm	ASTM D5185(m)	300	338		
Zinc	ppm	ASTM D5185(m)	370	398		
Sulfur	ppm	ASTM D5185(m)	2500	1157		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*	>0.05	0.002		
ppm Water	ppm	ASTM D6304*	>500	25		




OIL ANALYSIS REPORT

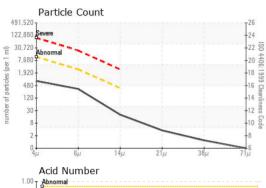



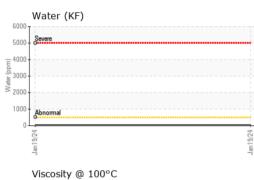

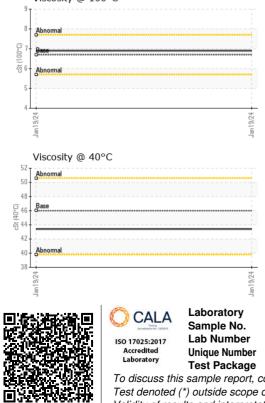

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	698		
Particles >6µm		ASTM D7647	>2500	291		
Particles >14µm		ASTM D7647	>320	17		
Particles >21µm		ASTM D7647	>80	3		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.37		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	43.4		
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	6.9		
Viscosity Index (VI)	Scale	ASTM D2270*	97	115		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

164:347:368.171	🔿 CALA	Laboratory	: WearCheck - C8	3-1175 Appleby Lin	Environmental 360 Solutions Ltd.	
永不均 回	Accreditation No. 1205279	Sample No.	: E30001209	Recieved	: 23 Jan 2024	640 Victoria Street
	ISO 17025:2017	Lab Number	: 02610588	Diagnosed	: 24 Jan 2024	Cobourg, ON
	Accredited	Unique Number	: 5711674	Diagnostician	: Tatiana Sorkina	CA K9A 5H5
	Laboratory	Test Package	: IND 2 (Addition	al Tests: KF, KV10	D, VI)	Contact: Tatiana Sorkina
	To discuss this	tsorkina@e360s.ca				
	Test denoted (*) outside scope	T: (800)263-3939			
JZYNCOMTHP	Validity of resu	lts and interpreta	F: (905)373-4950			