


OIL ANALYSIS REPORT

BUILDING 63 - CENTRAL DRAIN & FILL BARREL VAN 9 (S/N BULBULB)

Bulk Fluid Tank

{not provided} (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

Viscosity of sample indicates oil is within ISO 32 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			,	Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		wc		
Sample Date		Client Info		22 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	0	Client Info		N/A		
Sample Status		Chorte trillo		NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185(m)		0		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	. ,		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0 <1		
	ppm	ASTM D5185(m)				
Lead	ppm	ASTM D5185(m) ASTM D5185(m)		0 <1		
Copper	ppm	. ,		0		
	ppm	ASTM D5185(m)		-		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		78		
Phosphorus	ppm	ASTM D5185(m)		582		
Zinc	ppm	ASTM D5185(m)		731		
Sulfur	ppm	ASTM D5185(m)		1991		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2978		
Particles >6µm		ASTM D7647	>1300	693		
Particles >14µm		ASTM D7647	>160	49		
Particles >21µm		ASTM D7647	>40	11		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/13		



OIL ANALYSIS REPORT

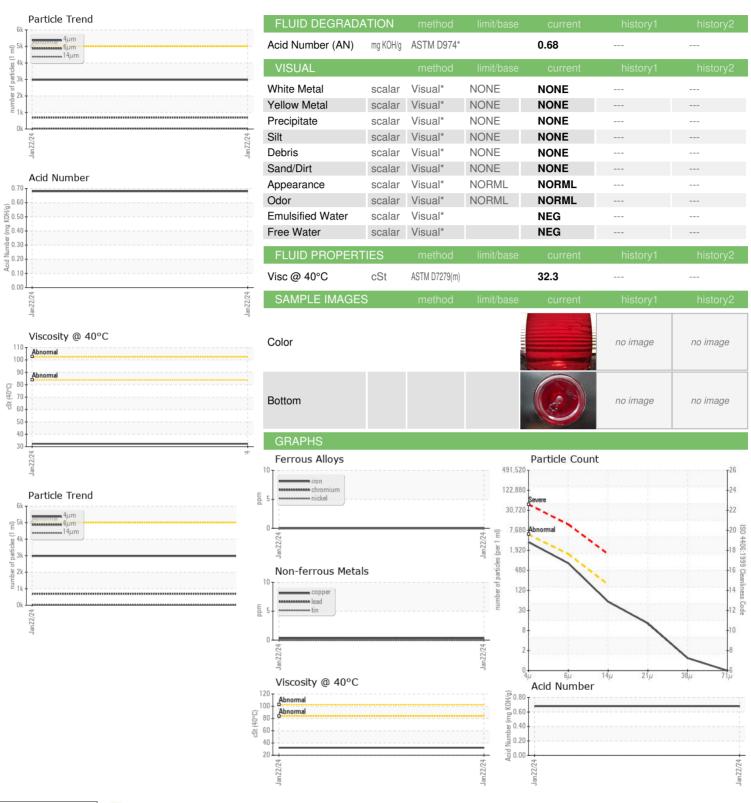



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number

: WC

: 02610602 : 5711688 Test Package : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 23 Jan 2024 Recieved Diagnosed : 25 Jan 2024

: Kevin Marson Diagnostician

HIRAM WALKER & SONS LTD. 2072 RIVERSIDE DRIVE EAST, BOX 2518 WINDSOR, ON

> CA N8Y 4S5 Contact: Matt Morand

matt.morand@pernod-ricard.com T: (519)561-5359 F: (519)971-5719

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.