

# FUEL REPORT

Sample Rating Trend



#### Area [312930] Machine Id **YY8600165** Component

Diesel Fuel

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)

### DIAGNOSIS

#### Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. We advise that you filter this fluid before use. We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Corrosion

{not applicable}

#### Contaminants

There is a light amount of silt (particulates < 14 microns in size) present in the fuel. The water content is negligible.

## **Fuel Condition**


All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel (US EPA/CGSB-3.517-3 type B).

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KT0000993		
Sample Date		Client Info		22 Jan 2024		
Machine Age	hrs	Client Info		0		
Sample Status				ATTENTION		
PHYSICAL PROP	FRTIFS	method	limit/base	current	history1	history2
			0.839	0.844		
Specific Gravity Fuel Color	tout	ASTM D1298* Visual Screen*	Vllow	DkYlw		
Visc @ 40°C	text cSt	ASTM D7279(m)	3.0	2.6		
Pensky-Martens Flash Point	°C	ASTM D7215(III)	52	60.6		
SULFUR CONTEN	-	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	10	13		matoryz
	ррпі	( )		-		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	165	172		
5% Distillation Point	°C	ASTM D2887*	0.0.4	195		
10% Distill Point	°C	ASTM D2887*	201	206		
15% Distillation Point	°C	ASTM D2887*	0.1.0	214		
20% Distill Point	°C	ASTM D2887*	216	222		
30% Distill Point	°C	ASTM D2887*	230	237		
40% Distill Point	°C	ASTM D2887*	243	249		
50% Distill Point	°C	ASTM D2887*	255	261		
60% Distill Point	°C	ASTM D2887*	267	274		
70% Distill Point	°C	ASTM D2887*	280	287		
80% Distill Point	°C	ASTM D2887*	295	302		
85% Distillation Point	°C	ASTM D2887*	010	314		
90% Distill Point	°C	ASTM D2887*	310	325		
95% Distillation Point	°C	ASTM D2887*	0.44	345		
Final Boiling Point	°C	ASTM D2887*	341	377		
IGNITION QUALIT	٦Y	method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	37.7	36		
Cetane Index		ASTM D4737*	<40.0	47		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0		
Sodium	ppm	ASTM D5185(m)	<0.1	<1		
<b>D</b> · · ·						
Potassium	ppm	ASTM D5185(m)	<0.1	0		
Potassium Water	ppm %	ASTM D5185(m) ASTM D6304*	<0.1 <0.05	0 0.003		
Water				-		
Water	% ppm	ASTM D6304*	<0.05	0.003		
Water ppm Water FLUID CLEANLIN	% ppm	ASTM D6304* ASTM D6304*	<0.05 <500	0.003 28		
Water ppm Water FLUID CLEANLIN Particles >4µm	% ppm	ASTM D6304* ASTM D6304* method	<0.05 <500 limit/base	0.003 28 current	  history1	  history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	% ppm	ASTM D6304* ASTM D6304* method ASTM D7647	<0.05 <500 limit/base >2500	0.003 28 current 2514	  history1 	  history2
Water ppm Water	% ppm	ASTM D6304* ASTM D6304* <b>method</b> ASTM D7647 ASTM D7647	<0.05 <500 limit/base >2500 >640	0.003 28 current 2514 587	 history1 	 history2 
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	% ppm	ASTM D6304* ASTM D6304* <b>method</b> ASTM D7647 ASTM D7647 ASTM D7647	<0.05 <500 limit/base >2500 >640 >80	0.003 28 current ▲ 2514 587 26	 history1  	 history2  
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	% ppm	ASTM D6304* ASTM D6304* Method ASTM D7647 ASTM D7647 ASTM D7647	<0.05 <500 <b>limit/base</b> >2500 >640 >80 >20	0.003 28	 history1  	 history2  

Contact/Location: PAUL COOTE - VESYOR



# **FUEL REPORT**

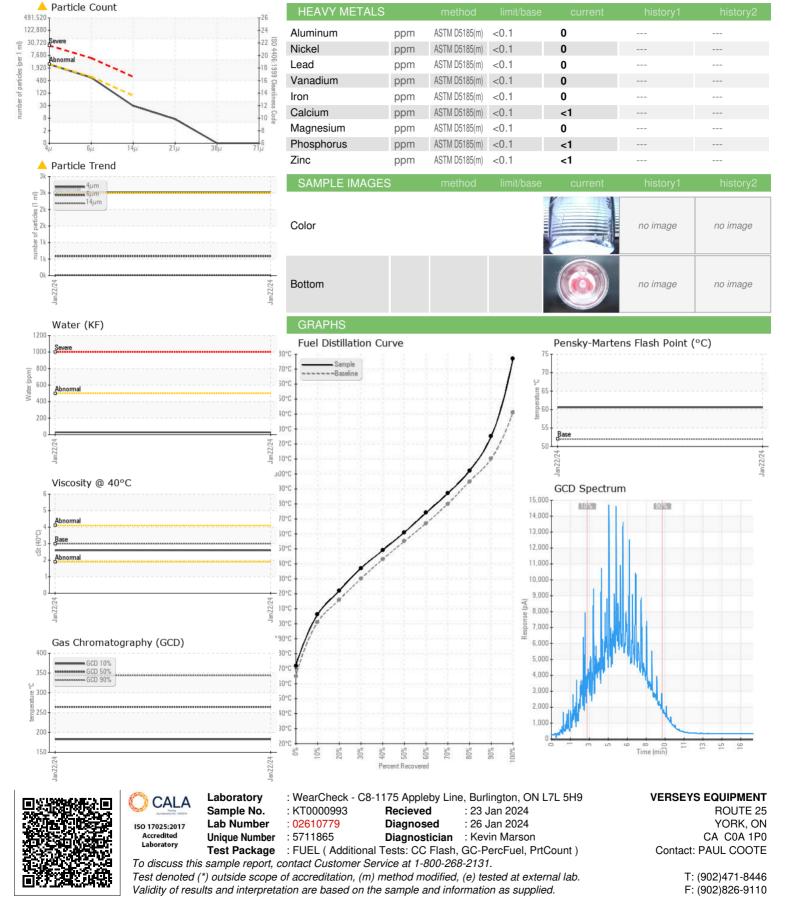

Contact/Location: PAUL COOTE - VESYOR