



GREASE ANALYSIS

Sample Rating Trend

NORMAL



Area
ONE-TIME TEST POINTS
 Machine Id
1275 ALMAPLEX

Component
Grease
 Fluid
LUBRICATION ENG ALMAPLEX 1275 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Not enough sample submitted to perform particle count, therefore fluid cleanliness levels were not determined.

Wear

All component wear rates are normal.

Grease Condition

The condition of the grease is acceptable for the time in service.

Contaminants

There is no indication of any contamination in the grease. There is no indication of any contamination in the component(unconfirmed).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC	---	---
Sample Date	Client Info			22 Jan 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Grease Age	hrs	Client Info		0	---	---
Grease Serviced	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*	>200	0	---	---
Iron	ppm	ASTM D5185(m)	>250	18	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Lead	ppm	ASTM D5185(m)	>25	<1	---	---
Copper	ppm	ASTM D5185(m)	>75	0	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	20	17	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Phosphorus	ppm	ASTM D5185(m)	0	0	---	---
Zinc	ppm	ASTM D5185(m)	5	5	---	---
Antimony	ppm	ASTM D5185(m)	350	344	---	---


THICKENER/SOAP		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)	200	207	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Calcium	ppm	ASTM D5185(m)	15	14	---	---
Sodium	ppm	ASTM D5185(m)	0	<1	---	---
Lithium	ppm	ASTM D5185(m)	0	<1	---	---
Sulfur	ppm	ASTM D5185(m)	700	708	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>150	29	---	---
Potassium	ppm	ASTM D5185(m)		6	---	---

GREASE CONDITION		method	limit/base	current	history1	history2
Grease Color	Visual*	Orange		Brown	---	---
Texture	In-house*	Smooth		Buttery	---	---
NLGI Consistency	NLGI Scale	SKF Method*	2	3	---	---







GREASE ANALYSIS

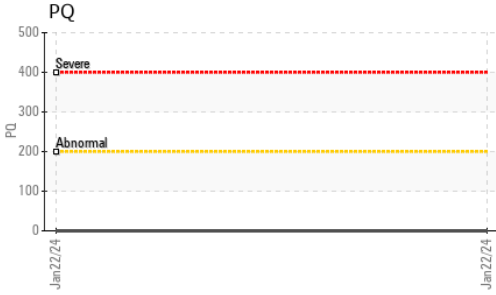

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

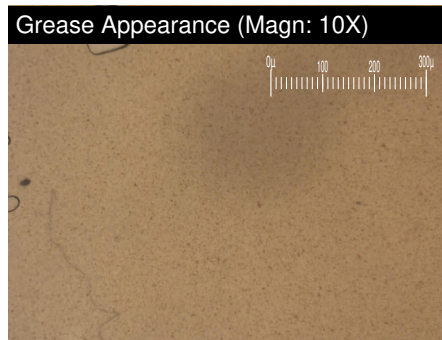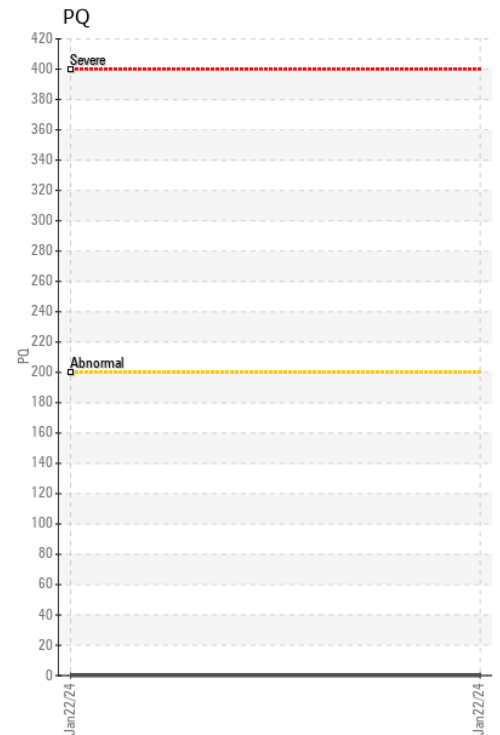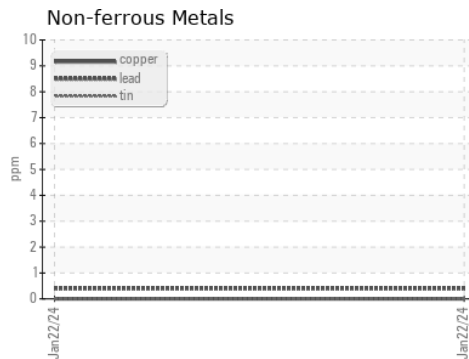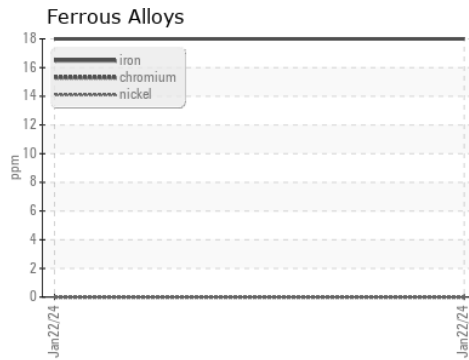

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC **Received** : 23 Jan 2024
Lab Number : 02610789 **Diagnosed** : 26 Jan 2024
Unique Number : 5711875 **Diagnostician** : Bill Quesnel
Test Package : GRS 1 (Additional Tests: BottomAnalysis, PrtCount, PrtFilter, TAN Auto, TAN Man)

HIRAM WALKER & SONS LTD.
 2072 RIVERSIDE DRIVE EAST, BOX 2518
 WINDSOR, ON
 CA N8Y 4S5
 Contact: Matt Morand
 matt.morand@pernod-ricard.com
 T: (519)561-5359
 F: (519)971-5719

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.