




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

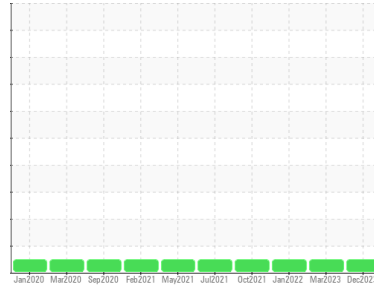

Machine Id

**1083**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0853130</b>	WC0738007	WC0624706
Sample Date	Client Info			<b>15 Dec 2023</b>	08 Mar 2023	20 Jan 2022
Machine Age	kms	Client Info		<b>359276</b>	399328	225498
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>17</b>	17	31
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	3
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	2	4
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	1	7
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	<1	2
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>42</b>	46	26
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>2</b>	9	5
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>711</b>	712	759
Calcium	ppm	ASTM D5185(m)	3000	<b>1301</b>	1389	1418
Phosphorus	ppm	ASTM D5185(m)	1150	<b>689</b>	730	718
Zinc	ppm	ASTM D5185(m)	1350	<b>746</b>	747	812
Sulfur	ppm	ASTM D5185(m)	4250	<b>2602</b>	2530	2700
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	4	6
Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	4	11

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.3</b>	0	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.3</b>	10.2	10.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>21.3</b>	23.1	24.5











# OIL ANALYSIS REPORT

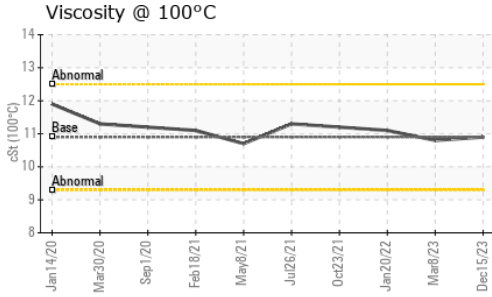

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.9</b>	17.2	20.2
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>10.9</b>	10.8	11.1

## GRAPHS

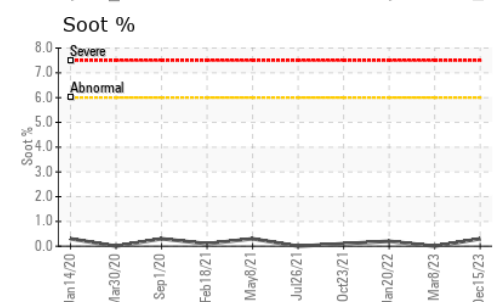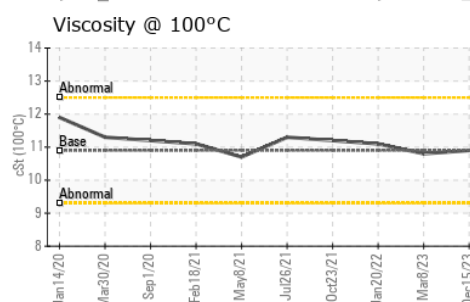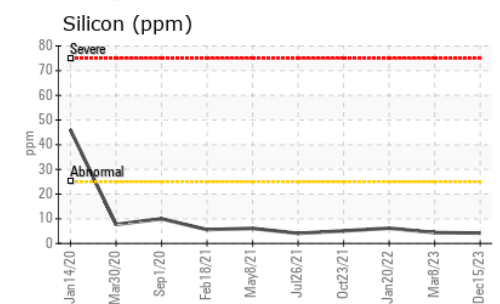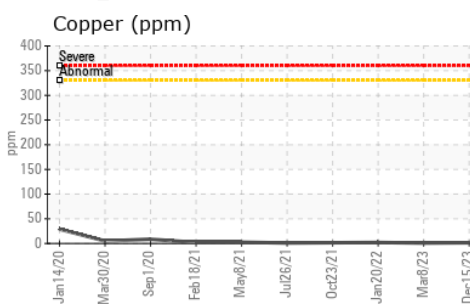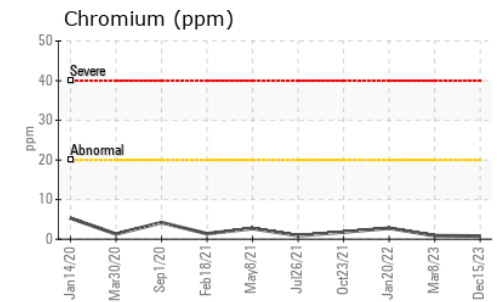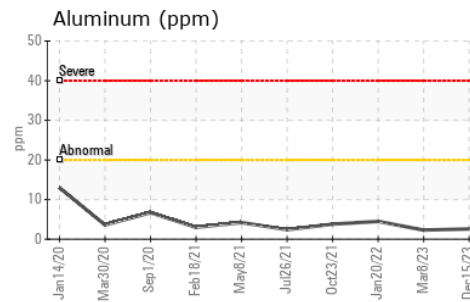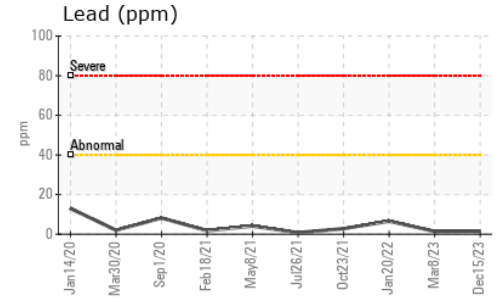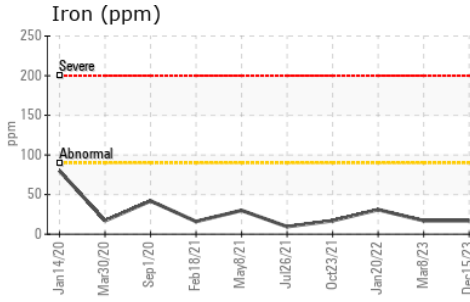

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0853130 **Received** : 24 Jan 2024  
**Lab Number** : **02610812** **Diagnosed** : 24 Jan 2024  
**Unique Number** : 5711898 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.