




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

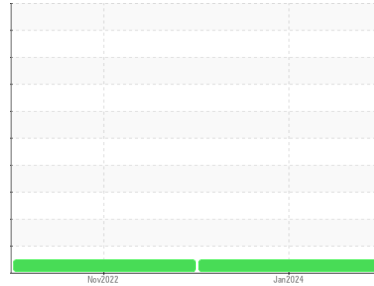

Area
[43008356]

Machine Id
9747

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0853156	WC0737983	---
Sample Date	Client Info		21 Jan 2024	27 Nov 2022	---
Machine Age	kms	Client Info	77860	24832	---
Oil Age	kms	Client Info	0	0	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	28	55	---
Chromium	ppm	ASTM D5185(m) >20	2	<1	---
Nickel	ppm	ASTM D5185(m) >4	1	<1	---
Titanium	ppm	ASTM D5185(m)	0	<1	---
Silver	ppm	ASTM D5185(m) >3	<1	0	---
Aluminum	ppm	ASTM D5185(m) >20	18	8	---
Lead	ppm	ASTM D5185(m) >40	2	3	---
Copper	ppm	ASTM D5185(m) >330	4	33	---
Tin	ppm	ASTM D5185(m) >15	<1	1	---
Antimony	ppm	ASTM D5185(m)	0	<1	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	33	53	---
Barium	ppm	ASTM D5185(m) 10	0	<1	---
Molybdenum	ppm	ASTM D5185(m) 100	2	61	---
Manganese	ppm	ASTM D5185(m)	<1	4	---
Magnesium	ppm	ASTM D5185(m) 450	724	395	---
Calcium	ppm	ASTM D5185(m) 3000	1344	1792	---
Phosphorus	ppm	ASTM D5185(m) 1150	699	1051	---
Zinc	ppm	ASTM D5185(m) 1350	772	1199	---
Sulfur	ppm	ASTM D5185(m) 4250	2584	2752	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	8	15	---
Sodium	ppm	ASTM D5185(m)	2	4	---
Potassium	ppm	ASTM D5185(m) >20	42	16	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.2	1.7	---
Nitration	Abs/cm	ASTM D7624* >20	9.9	8.9	---
Sulfation	Abs./1mm	ASTM D7415* >30	22.7	25.1	---




OIL ANALYSIS REPORT

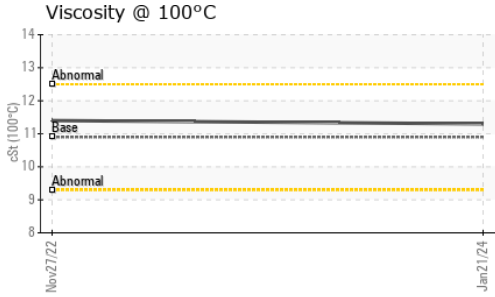

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.1	18.1	---
VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.3	11.4	---

GRAPHS

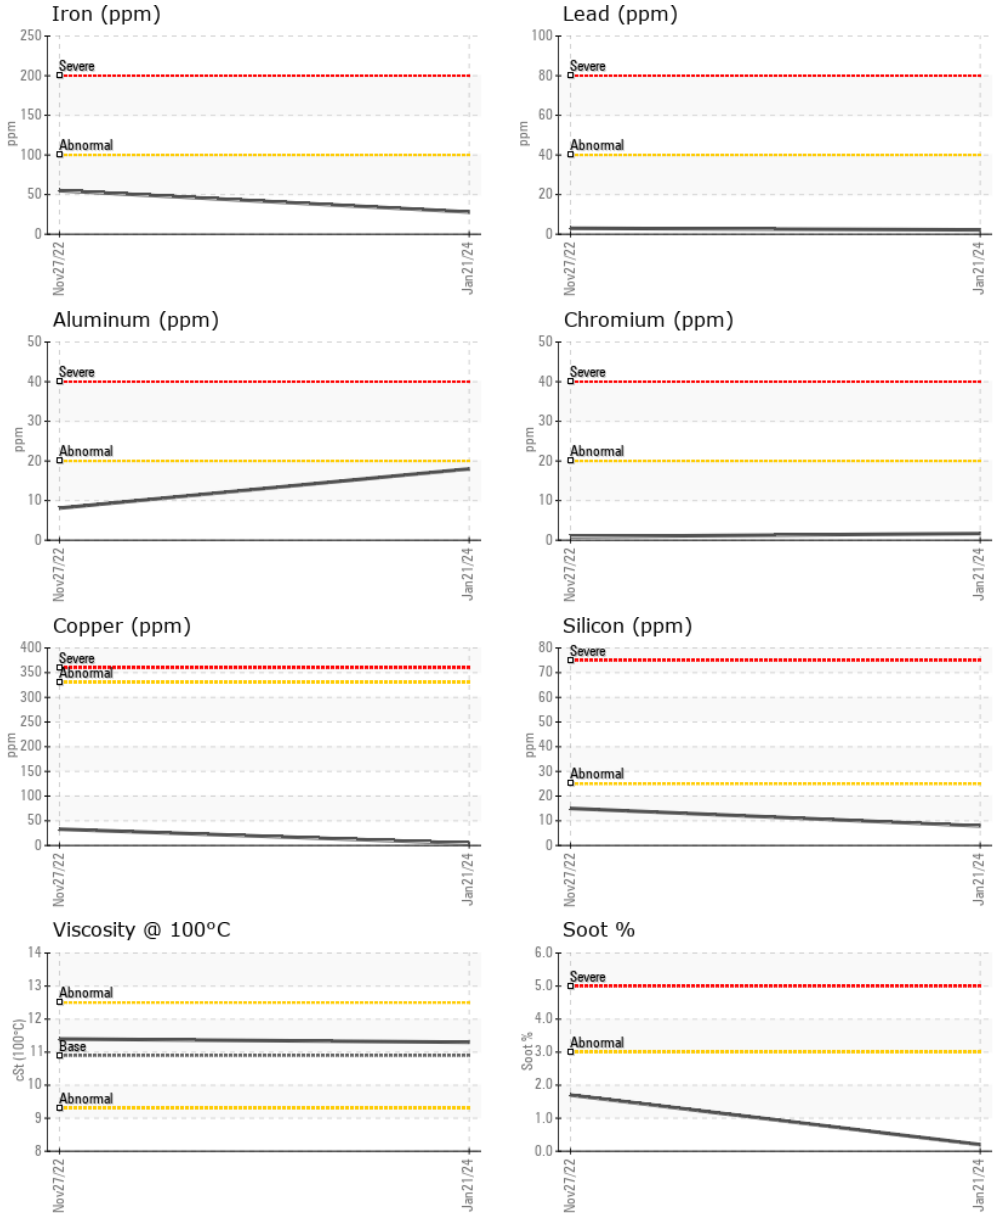

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853156 **Received** : 24 Jan 2024
Lab Number : **02610819** **Diagnosed** : 24 Jan 2024
Unique Number : 5711905 **Diagnostician** : Wes Davis
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.