OIL ANALYSIS REPORT

Area
[1-1OK0OT88]
Machine Id
YORK SLYM436600
Component
Chiller
Fluid
YORK TYPE K (--- GAL)

Sample Rating Trend

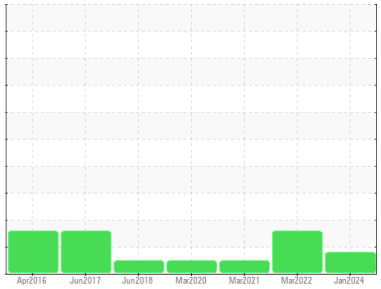

WEAR

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
Iron ppm levels are noted. All other component wear rates are normal. The high metal levels indicate corrosion in the system.

Contamination
The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**GTT0001828**	GTT68269	GTT68270
Sample Date		Client Info		**30 Jan 2024**	24 Mar 2022	22 Mar 2021
Machine Age	hrs	Client Info		**0**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**ATTENTION**	ATTENTION	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>8	**10**	<1	1
Chromium	ppm	ASTM D5185(m)	>2	**0**	<1	<1
Nickel	ppm	ASTM D5185(m)		**<1**	---	---
Titanium	ppm	ASTM D5185(m)		**0**	---	---
Silver	ppm	ASTM D5185(m)	>2	**0**	---	---
Aluminum	ppm	ASTM D5185(m)	>3	**<1**	<1	<1
Lead	ppm	ASTM D5185(m)	>2	**<1**	<1	<1
Copper	ppm	ASTM D5185(m)	>8	**<1**	<1	<1
Tin	ppm	ASTM D5185(m)	>4	**0**	<1	<1
Antimony	ppm	ASTM D5185(m)		**0**	---	---
Vanadium	ppm	ASTM D5185(m)		**0**	---	---
Beryllium	ppm	ASTM D5185(m)		**0**	---	---
Cadmium	ppm	ASTM D5185(m)		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	**0**	---	---
Barium	ppm	ASTM D5185(m)	0	**0**	---	---
Molybdenum	ppm	ASTM D5185(m)	0	**0**	---	---
Manganese	ppm	ASTM D5185(m)	0	**0**	---	---
Magnesium	ppm	ASTM D5185(m)	0	**<1**	---	---
Calcium	ppm	ASTM D5185(m)	0	**0**	---	---
Phosphorus	ppm	ASTM D5185(m)	5	**0**	---	---
Zinc	ppm	ASTM D5185(m)	0	**<1**	<1	<1
Sulfur	ppm	ASTM D5185(m)	10	**0**	---	---
Lithium	ppm	ASTM D5185(m)		**<1**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	**2**	---	---
Sodium	ppm	ASTM D5185(m)		**<1**	---	---
Potassium	ppm	ASTM D5185(m)	>20	**<1**	---	---
ppm Water	ppm	ASTM D6304*	>300	**16**	337	160

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.03	**0.07**	0.076	0.062

OIL ANALYSIS REPORT

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	---	---
Yellow Metal	scalar	Visual*	NONE	**NONE**	---	---
Precipitate	scalar	Visual*	NONE	**NONE**	---	---
Silt	scalar	Visual*	NONE	**NONE**	---	---
Debris	scalar	Visual*	NONE	**NONE**	---	---
Sand/Dirt	scalar	Visual*	NONE	**NONE**	---	---
Appearance	scalar	Visual*	NORML	**NORML**	---	---
Odor	scalar	Visual*	NORML	**NORML**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32.0	**61.1**	---	---

SAMPLE IMAGES				current	history1	history2
Color					*no image*	*no image*
Bottom					*no image*	*no image*

GRAPHS

Sample No. : GTT0001828
Lab Number : 02620991
Unique Number : 5746110
Test Package : IND 2 (Additional Tests: KV40)

Received : 08 Mar 2024
Tested : 11 Mar 2024
Diagnosed : 11 Mar 2024 - Bill Quesnel

To discuss this sample report, contact Customer Service at 1-905-847-9300 Ext 26.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Damages: Seller shall in no event be liable for special, incidental, or consequential damages, of a commercial nature, resulting from any cause.

Johnson Controls - Markham
Accounts Payable A-33, P.O. Box 2012
Milwaukee, WI
US 532012012
Contact: Service Manager
T:
F: