




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
RONI
 Machine Id
193
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

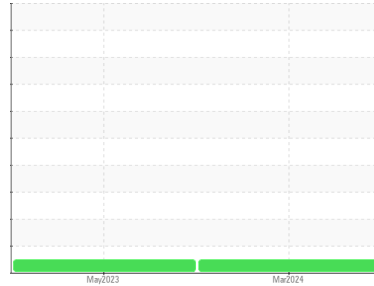

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 40 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0899441	LH0256798	---
Sample Date	Client Info		04 Mar 2024	24 May 2023	---
Machine Age	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	3	6	---
Chromium	ppm	ASTM D5185(m)	>5	0	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>15	1	2	---
Lead	ppm	ASTM D5185(m)	>30	0	0	---
Copper	ppm	ASTM D5185(m)	>125	1	2	---
Tin	ppm	ASTM D5185(m)	>5	<1	<1	---
Antimony	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	2	72	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	50	58	60	---
Manganese	ppm	ASTM D5185(m)	0	0	<1	---
Magnesium	ppm	ASTM D5185(m)	950	943	452	---
Calcium	ppm	ASTM D5185(m)	1050	1070	1857	---
Phosphorus	ppm	ASTM D5185(m)	995	1001	1104	---
Zinc	ppm	ASTM D5185(m)	1180	1173	1203	---
Sulfur	ppm	ASTM D5185(m)	2600	2707	2848	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>60	4	8	---
Sodium	ppm	ASTM D5185(m)		1	1	---
Potassium	ppm	ASTM D5185(m)	>20	0	1	---

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	6.2	7.5	---
Sulfation	Abs.1mm	ASTM D7415*	>30	18.0	19.3	---



OIL ANALYSIS REPORT

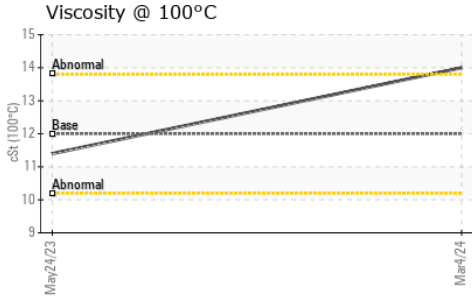

FLUID DEGRADATION		method	limit/base	current	history1	history2
-------------------	--	--------	------------	---------	----------	----------

Oxidation	Abs./1mm	ASTM D7414*	>25	14.1	15.9	---
-----------	----------	-------------	-----	-------------	------	-----

VISUAL		method	limit/base	current	history1	history2
--------	--	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
------------------	--------	---------	------	------------	-----	-----

Free Water	scalar	Visual*		NEG	NEG	---
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES		method	limit/base	current	history1	history2
------------------	--	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	12.00	14.0	11.4	---
--------------	-----	---------------	-------	-------------	------	-----

GRAPHS

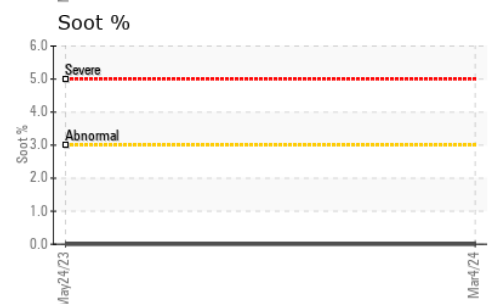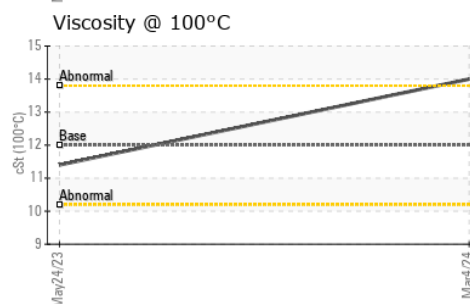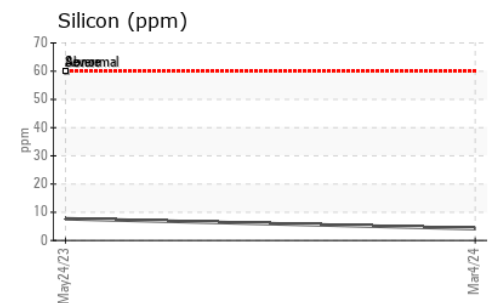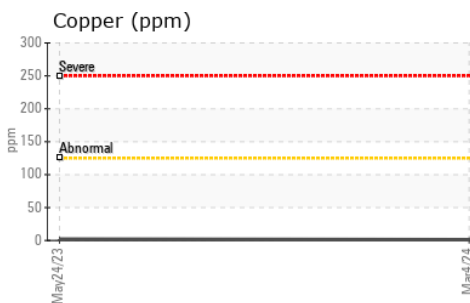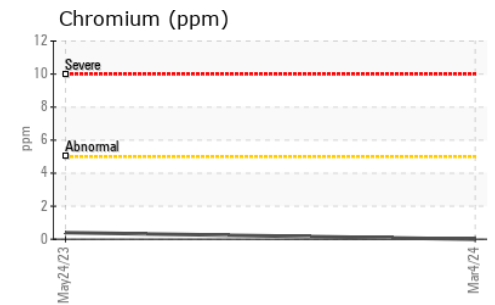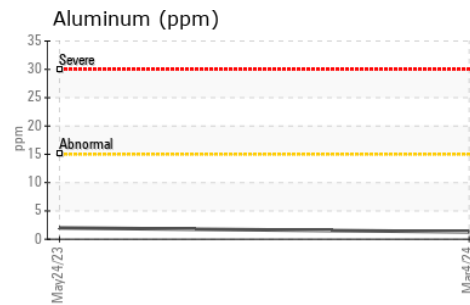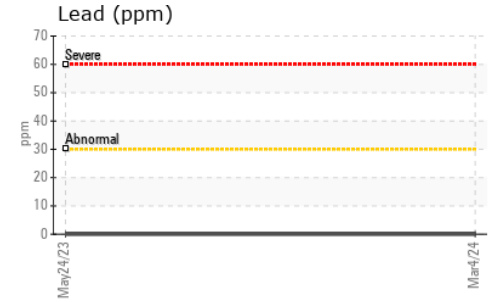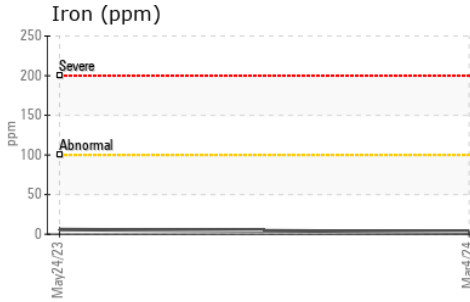

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0899441 **Received** : 11 Mar 2024
Lab Number : **02621035** **Tested** : 11 Mar 2024
Unique Number : 5746154 **Diagnosed** : 11 Mar 2024 - Kevin Marson
Test Package : MOBCE

RONI/IRON SHORE EXCAVATING LTD.
 100 MACINTOSH BLVD
 VAUGHAN, ON
 CA L4K 4P3
 Contact: Service Team
 service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.