



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**RONI**  
 Machine Id  
**459**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0899391</b>	---	---
Sample Date	Client Info		<b>06 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.21	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	<b>21</b>	---
Chromium	ppm	ASTM D5185(m)	>11	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---
Aluminum	ppm	ASTM D5185(m)	>31	<b>9</b>	---
Lead	ppm	ASTM D5185(m)	>26	<b>4</b>	---
Copper	ppm	ASTM D5185(m)	>26	<b>13</b>	---
Tin	ppm	ASTM D5185(m)	>4	<b>1</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>233</b>	---
Barium	ppm	ASTM D5185(m)		<b>4</b>	---
Molybdenum	ppm	ASTM D5185(m)		<b>247</b>	---
Manganese	ppm	ASTM D5185(m)		<b>5</b>	---
Magnesium	ppm	ASTM D5185(m)		<b>823</b>	---
Calcium	ppm	ASTM D5185(m)		<b>1472</b>	---
Phosphorus	ppm	ASTM D5185(m)		<b>909</b>	---
Zinc	ppm	ASTM D5185(m)		<b>1023</b>	---
Sulfur	ppm	ASTM D5185(m)		<b>2731</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	<b>10</b>	---
Sodium	ppm	ASTM D5185(m)	>31	<b>4</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.4</b>	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>21.4</b>	---



# OIL ANALYSIS REPORT








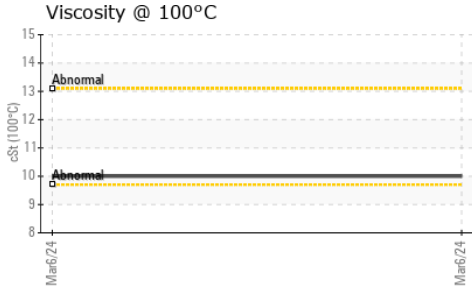


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.7	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)		10.0	---	---

## GRAPHS

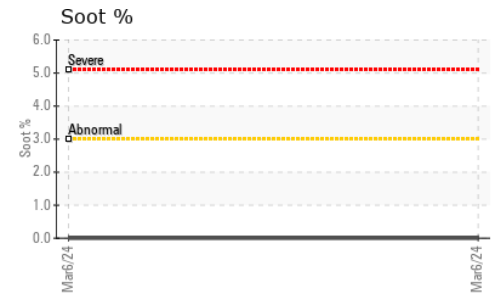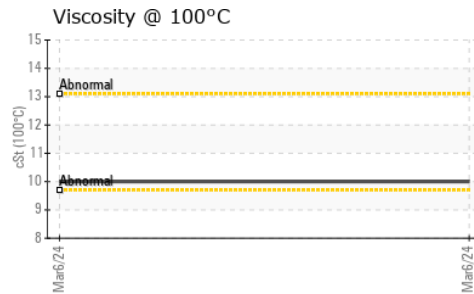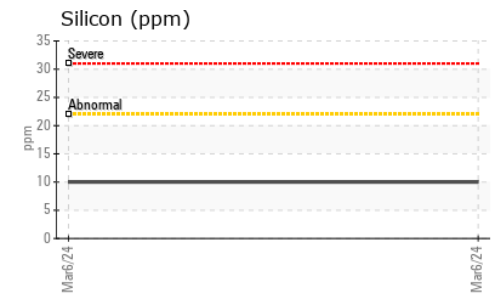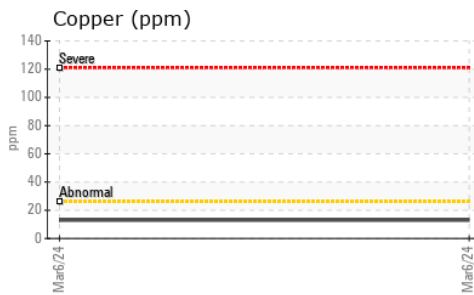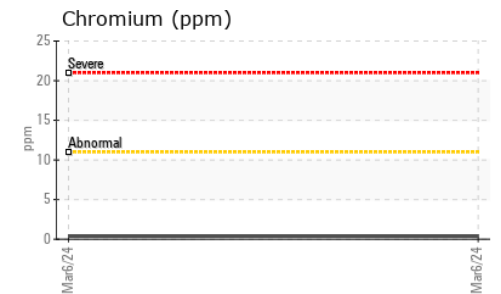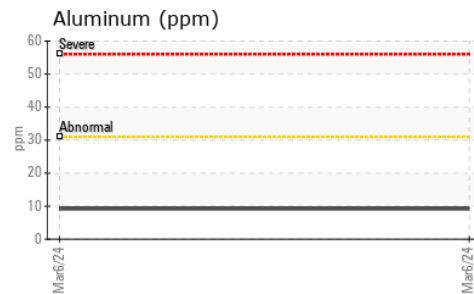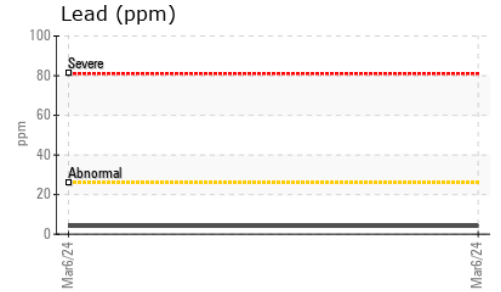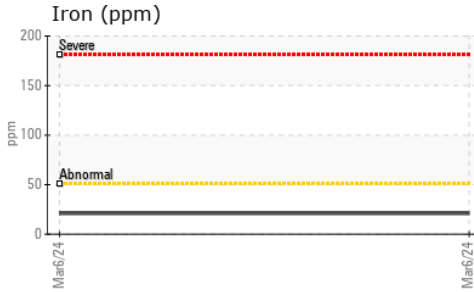

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0899391  
**Lab Number** : 02621061  
**Unique Number** : 5746180  
**Test Package** : MOBCE

**RONI/IRON SHORE EXCAVATING LTD.**  
 100 MACINTOSH BLVD  
 VAUGHAN, ON  
 CA L4K 4P3  
 Contact: Service Team  
 service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: