

OIL ANALYSIS REPORT

Chem-Ecol A2403039

Component **Unknown Component**

CHEM-ECOL GREENLUBE 68 (--- GAL)

Sample Rating Trend



Recommendation

We certify this oil to be clean, that the additives are at acceptable levels and the oil is suitable for use.

				Mar2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		3027-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/07/2024		
Sample Number		Client Info		E30001527		
Sample Date		Client Info		07 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
-		mathad	limit/booo	our wordt	hiotomit	history?
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		32		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		4		
Lead	ppm	ASTM D5185(m)		1		
Copper	ppm	ASTM D5185(m)		10		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		5		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		107		
Calcium	ppm	ASTM D5185(m)		88		
Phosphorus	ppm	ASTM D5185(m)		642		
Zinc	ppm	ASTM D5185(m)		677		
Sulfur	ppm	ASTM D5185(m)		1581		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		1		
Sodium	ppm	ASTM D5185(m)		8		
Potassium	ppm	ASTM D5185(m)	>20	1		
Water	%	ASTM D6304*		0.003		
		ACTM DCCC4*		00		

ppm Water


ASTM D6304*

ppm

36



OIL ANALYSIS REPORT

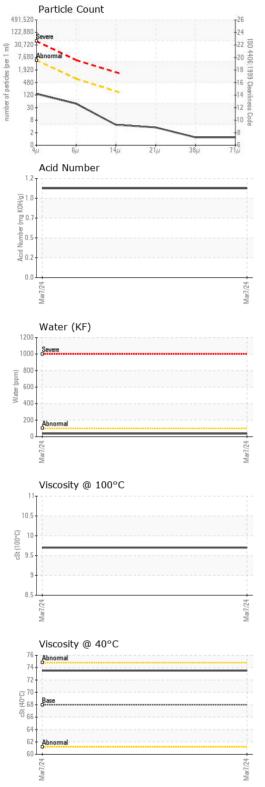

	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	121		
Particles >6µm		ASTM D7647	>640	41		
Particles >14µm		ASTM D7647	>160	4		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	14/13/9		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		1.08		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	73.5		
	cSt	ASTM D7279(m)		9.7		
Visc @ 100°C	COL					
Visc @ 100°C Viscosity Index (VI)	Scale	ASTM D2270*		111		
	Scale	, ,	limit/base	111 current	history1	history2
Viscosity Index (VI)	Scale	ASTM D2270*	limit/base	current		



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30001527 Lab Number : 02621097

Unique Number : 5746216

Received : 11 Mar 2024 **Tested** : 12 Mar 2024 Diagnosed

: 13 Mar 2024 - Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950