

OIL ANALYSIS REPORT

Bibby Ste-Croix - 888077 XB115-R

Component **Unknown Component**

CONDAT D 46 (--- GAL)

Sample Rating Trend NORMAL

Recommendation

We certify this oil to be clean, that the additives are at acceptable levels and the oil is suitable for use.

						`
			Mar2024			
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine ID		Client Info		560007M		
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage		Client Info		Lab Reclaim		
Sent to WC		Client Info		03/07/2024		
Sample Number		Client Info		E30001520		
Sample Date		Client Info		07 Mar 2024		
Machine Age	hrs	Client Info		0 Wai 2024		
Oil Age	hrs	Client Info		0		
Oil Changed	1115	Client Info		N/A		
ŭ		Cliefit IIIIO		NORMAL		
Sample Status				NORWAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		4		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		2		
Copper	ppm	ASTM D5185(m)		1		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1		
Barium	ppm	ASTM D5185(m)	40	0		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0	<1		
Calcium	ppm	ASTM D5185(m)		2		
Phosphorus	ppm	ASTM D5185(m)	1500	1384		
Zinc	ppm	ASTM D5185(m)	0	11		
Sulfur	ppm	ASTM D5185(m)	2100	2121		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.016		
Tatol	70	7.0 TW D0004		0.0.0		

ppm Water


ASTM D6304*

ppm

169



OIL ANALYSIS REPORT

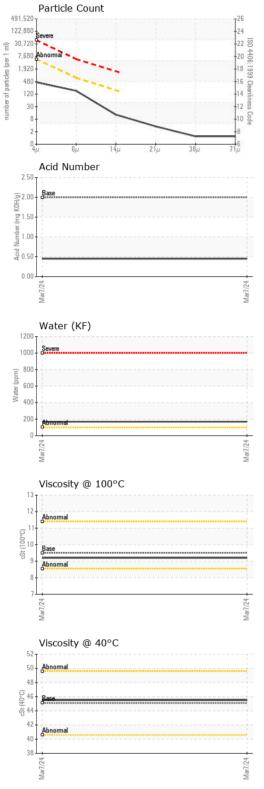

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	390		
Particles >6µm		ASTM D7647	>640	152		
Particles >14μm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	16/14/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	2.0	0.45		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	45.1	45.5		
Visc @ 100°C	cSt	ASTM D7279(m)	9.5	9.2		
Viscosity Index (VI)	Scale	ASTM D2270*	201	189		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30001520

Lab Number : 02621100 Unique Number : 5746219

Validity of results and interpretation are based on the sample and information as supplied.

Received : 11 Mar 2024 **Tested** : 12 Mar 2024 Diagnosed : 13 Mar 2024 - Tatiana Sorkina

Test Package: IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **Environmental 360 Solutions Ltd.**

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950