




# OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Area  
**1 White Oil/028 #1HTU/P Pump/201A 1 Stage HTU Charge**  
 Machine Id  
**N/A 28P201A (RECIP)**  
 Component  
**Pump**  
 Fluid  
**PETRO CANADA COMPRO COMPRESSOR OIL 150 (150 LTR)**

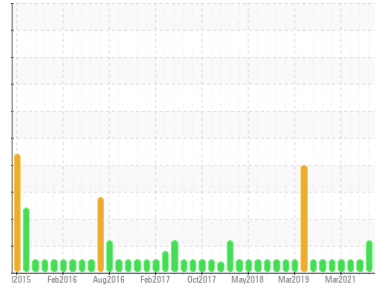

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0902154</b>	WC0783253	WC0301700
Sample Date	Client Info		<b>25 Feb 2024</b>	17 Feb 2023	06 Jan 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >90	<b>2</b>	2	<1
Chromium	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m) >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >7	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m) >12	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m) >30	<b>2</b>	2	2
Tin	ppm	ASTM D5185(m) >9	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 70	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185(m) 0	<b>0</b>	0	<1
Phosphorus	ppm	ASTM D5185(m) 60	<b>&lt;1</b>	2	3
Zinc	ppm	ASTM D5185(m) 2	<b>1</b>	<1	1
Sulfur	ppm	ASTM D5185(m) 5300	<b>3354</b>	3248	3279
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >60	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	<1


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>24182</b>	20617	296
Particles >6µm	ASTM D7647	>1300	<b>▲ 6370</b>	▲ 5237	62
Particles >14µm	ASTM D7647	>160	<b>● 273</b>	● 217	4
Particles >21µm	ASTM D7647	>40	<b>46</b>	40	1
Particles >38µm	ASTM D7647	>10	<b>2</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/14	<b>▲ 22/20/15</b>	▲ 22/20/15	15/13/9




# OIL ANALYSIS REPORT


▲ Particle Trend

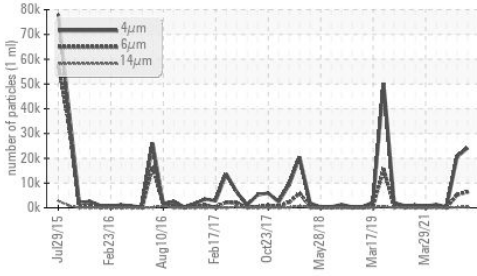


▲ Particle Trend

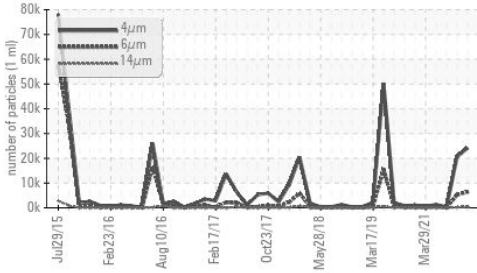

Acid Number

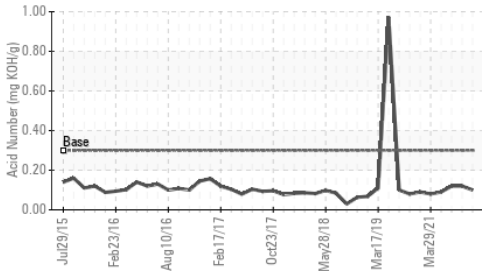

Viscosity @ 40°C

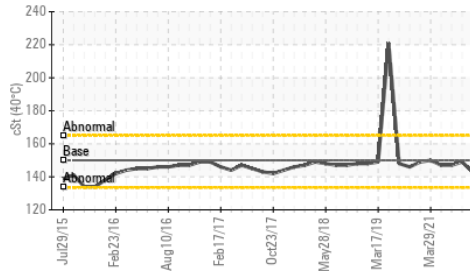

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.3	<b>0.10</b>	0.12	0.12


## VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	150	<b>143</b>	149	147

## SAMPLE IMAGES

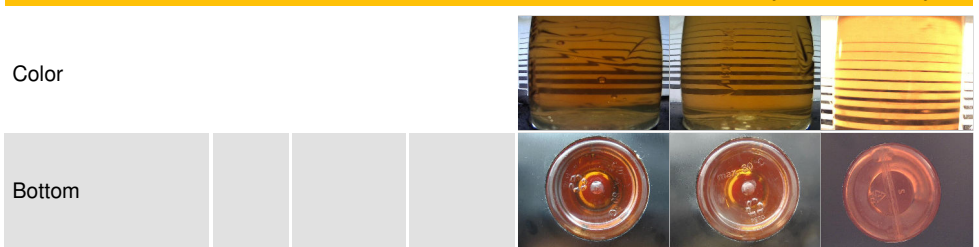


## GRAPHS


Ferrous Alloys

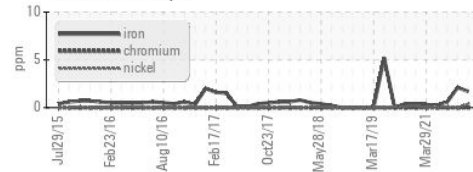


Non-ferrous Metals

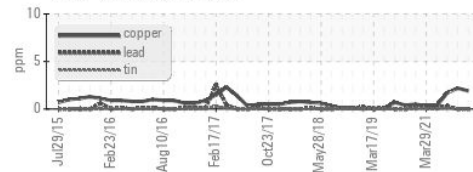


Viscosity @ 40°C

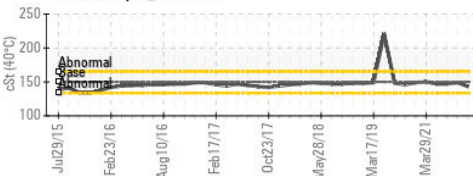

▲ Particle Count

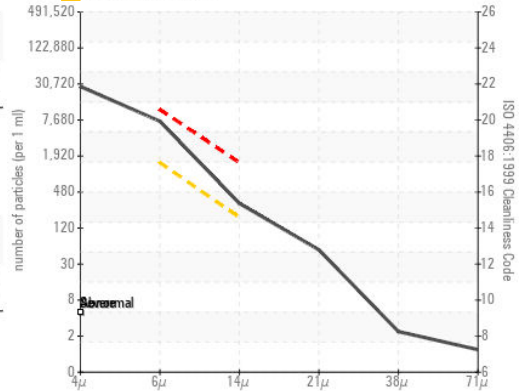

Acid Number

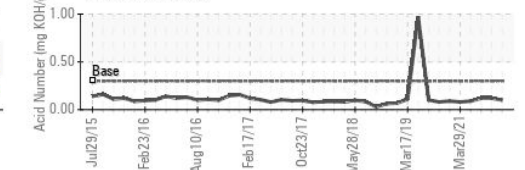

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0902154  
 Lab Number : 02621260  
 Unique Number : 5746379  
 Test Package : IND 2 ( Additional Tests: TAN Man )  
 Received : 11 Mar 2024  
 Tested : 12 Mar 2024  
 Diagnosed : 12 Mar 2024 - Wes Davis

**Petro Canada Lubricants Inc.**  
 385 Southdown Road  
 Mississauga, ON  
 CA L5J 2Y3  
 Contact: Kyle Blezard  
 kyle.blezard@HFSinclair.com  
 T: (905)403-6768  
 F: (905)822-6025

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.