

OIL ANALYSIS REPORT

Beryllium

Cadmium

ppm

ppm


ASTM D5185(m)

ASTM D5185(m)

Mi Metals - M05800 M1 3371

Component **Hydraulic System**

{not provided} (--- GAL)

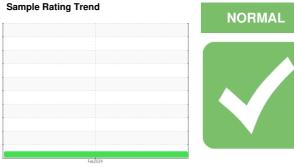

Recommendation

We certify this oil to be clean, that the additives are at acceptable levels and the oil is suitable for use.

Wear

Copper and iron ppm levels are noted.


				Feb 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		Mobile		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/08/2024		
Sample Number		Client Info		E30001548		
Sample Date		Client Info		27 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	17		
Chromium	ppm ppm	ASTM D5185(m) ASTM D5185(m)	>20 >20	17 0		
	• • • • • • • • • • • • • • • • • • • •	. ,				
Chromium	ppm	ASTM D5185(m)	>20	0		
Chromium Nickel	ppm ppm	ASTM D5185(m) ASTM D5185(m)	>20	0 <1		
Chromium Nickel Titanium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>20	0 <1 0		
Chromium Nickel Titanium Silver	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>20 >20	0 <1 0		
Chromium Nickel Titanium Silver Aluminum	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>20 >20 >20	0 <1 0 0		
Chromium Nickel Titanium Silver Aluminum Lead	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>20 >20 >20 >20 >20	0 <1 0 0 5		
Chromium Nickel Titanium Silver Aluminum Lead Copper	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	>20 >20 >20 >20 >20 >20	0 <1 0 0 5 4 29		

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		12		
Calcium	ppm	ASTM D5185(m)		41		
Phosphorus	ppm	ASTM D5185(m)		461		
Zinc	ppm	ASTM D5185(m)		380		
Sulfur	ppm	ASTM D5185(m)		2741		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANT	-S	method	limit/base	current	history1	history2

0



OIL ANALYSIS REPORT

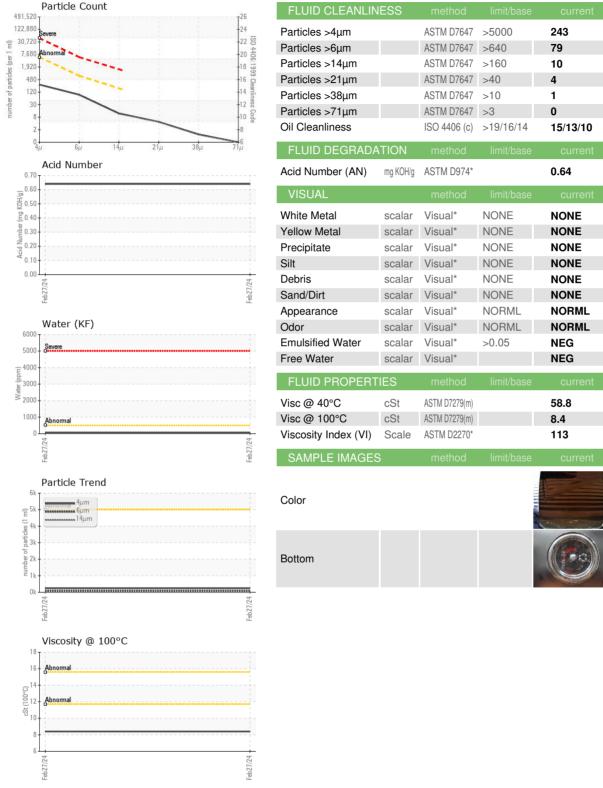

Environmental 360 Solutions Ltd.

no image

no image

no image

no image

640 Victoria Street Cobourg, ON CA K9A 5H5 Contact: Tatiana Sorkina

tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Test Package: IND 2 (Additional Tests: KF, KV100, VI)

: E30001548

: 02621443

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Received

Diagnosed

Tested

Validity of results and interpretation are based on the sample and information as supplied.

: 14 Mar 2024 - Tatiana Sorkina

: 12 Mar 2024

: 13 Mar 2024

CALA

ISO 17025:2017 Accredited

Laboratory

Laboratory

Sample No.

Lab Number

Unique Number : 5746562