


OIL ANALYSIS REPORT

Bibby Ste-Croix - 888077 XB118-R

Component **Unknown Component**

CONDAT D 46 (--- GAL)

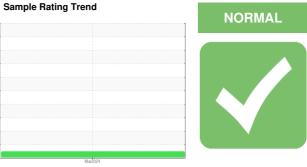

Recommendation

We certify this oil to be clean, that the additives are at acceptable levels and the oil is suitable for use.

						•	
			Mar2024				
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Machine ID		Client Info		560007			
Department		Client Info		Sales			
Sample From		Client Info		Machine			
Production Stage		Client Info		Lab Reclaim			
Sent to WC		Client Info		03/08/2024			
Sample Number		Client Info		E30001563			
Sample Date		Client Info		08 Mar 2024			
Machine Age	hrs	Client Info		0			
Oil Age	hrs	Client Info		0			
Oil Changed		Client Info		N/A			
Sample Status				NORMAL			
WEAR METALS		method	limit/base	current	history1	history2	
ron	ppm	ASTM D5185(m)		2			
Chromium	ppm	ASTM D5185(m)		1			
Nickel	ppm	ASTM D5185(m)		<1			
Titanium	ppm	ASTM D5185(m)		0			
Silver	ppm	ASTM D5185(m)		0			
Aluminum	ppm	ASTM D5185(m)		<1			
_ead	ppm	ASTM D5185(m)		0			
Copper	ppm	ASTM D5185(m)		<1			
Tin	ppm	ASTM D5185(m)		0			
Antimony	ppm	ASTM D5185(m)		0			
Vanadium	ppm	ASTM D5185(m)		0			
Beryllium	ppm	ASTM D5185(m)		0			
Cadmium	ppm	ASTM D5185(m)		0			
ADDITIVES	PPIII		limit/base		history1	history	
		method		current	· ·	history2	
Boron	ppm	ASTM D5185(m)	0	<1			
Barium	ppm	ASTM D5185(m)	40	0			
Molybdenum	ppm	ASTM D5185(m)	0	0			
Manganese	ppm	\ /	0	0			
Magnesium	ppm	ASTM D5185(m)	0	<1			
Calcium	ppm	ASTM D5185(m)		1			
Phosphorus	ppm	ASTM D5185(m)	1500	1479			
Zinc	ppm	ASTM D5185(m)	0	3			
Sulfur	ppm	ASTM D5185(m)	2100	2246			
Lithium	ppm	ASTM D5185(m)		<1			
CONTAMINANTS	3	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)		2			
Sodium	ppm	ASTM D5185(m)		<1			
Potassium	ppm	ASTM D5185(m)	>20	1			
Water	%	ASTM D6304*		0.013			
		ACTI A DAGE !!					

ppm Water


ASTM D6304*

ppm

140



OIL ANALYSIS REPORT

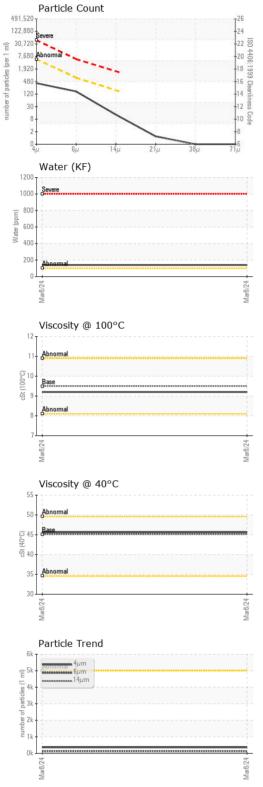

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	355		
Particles >6µm		ASTM D7647	>640	141		
Particles >14µm		ASTM D7647	>160	11		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	16/14/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	2.0	0.54		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	45.1	45.6		
Visc @ 100°C	cSt	ASTM D7279(m)	9.5	9.2		
Viscosity Index (VI)	Scale	ASTM D2270*	201	189		
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
				F30		
Color					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02621446

: E30001563 Unique Number : 5746565

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 12 Mar 2024 **Tested** : 13 Mar 2024

Diagnosed : 15 Mar 2024 - Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI)

To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950