



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
ES09

Component
Auxiliary Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- LTR)



DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

Copper ppm levels are noted. All other component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0914619	---	---
Sample Date	Client Info	11 Mar 2024	---	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ATTENTION	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<1	---
Chromium	ppm	ASTM D5185(m)	>20	0	---
Nickel	ppm	ASTM D5185(m)	>20	1	---
Titanium	ppm	ASTM D5185(m)		0	---
Silver	ppm	ASTM D5185(m)		0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---
Lead	ppm	ASTM D5185(m)	>20	1	---
Copper	ppm	ASTM D5185(m)	>20	33	---
Tin	ppm	ASTM D5185(m)	>20	0	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	5	0	---
Barium	ppm	ASTM D5185(m)	5	<1	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---
Manganese	ppm	ASTM D5185(m)		0	---
Magnesium	ppm	ASTM D5185(m)	25	<1	---
Calcium	ppm	ASTM D5185(m)	200	<1	---
Phosphorus	ppm	ASTM D5185(m)	300	351	---
Zinc	ppm	ASTM D5185(m)	370	268	---
Sulfur	ppm	ASTM D5185(m)	2500	803	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS






method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	0	---
Sodium	ppm	ASTM D5185(m)		0	---
Potassium	ppm	ASTM D5185(m)	>20	2	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	5249	---
Particles >6µm	ASTM D7647	>1300	1102	---
Particles >14µm	ASTM D7647	>160	49	---
Particles >21µm	ASTM D7647	>40	9	---
Particles >38µm	ASTM D7647	>10	1	---
Particles >71µm	ASTM D7647	>3	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	20/17/13	---



OIL ANALYSIS REPORT

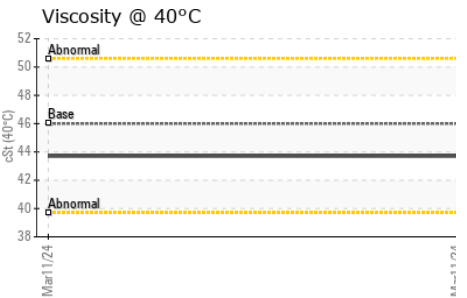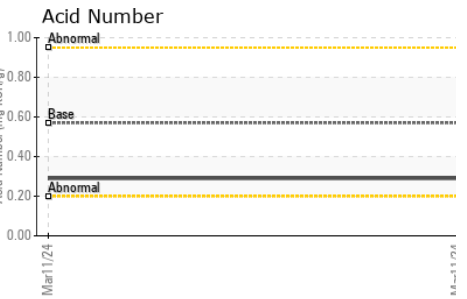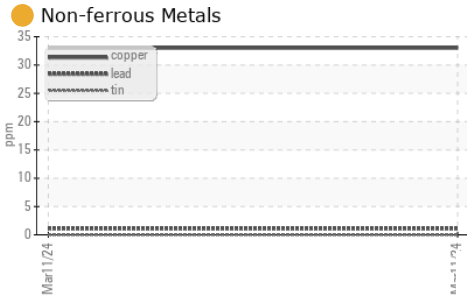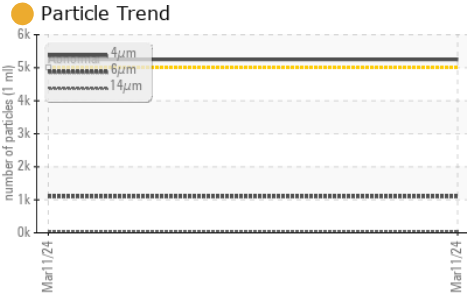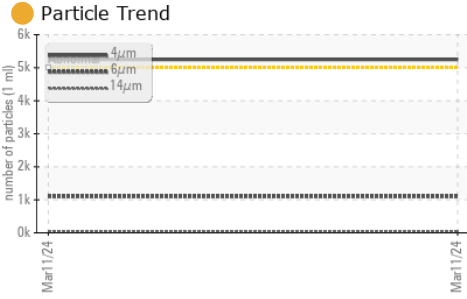

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.29	---	---





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	46	43.7	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

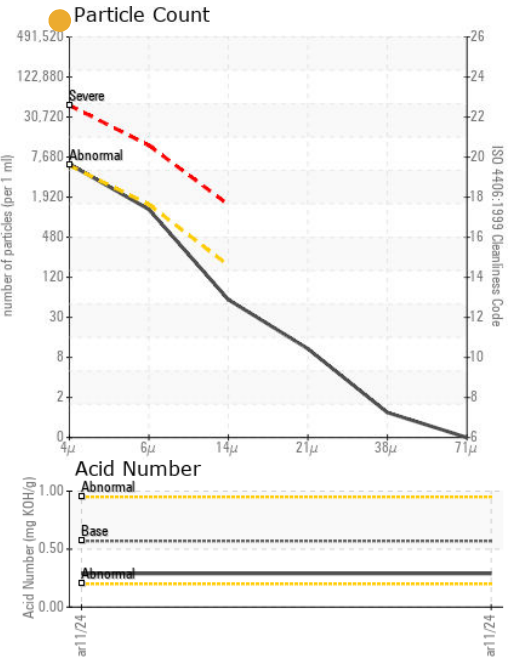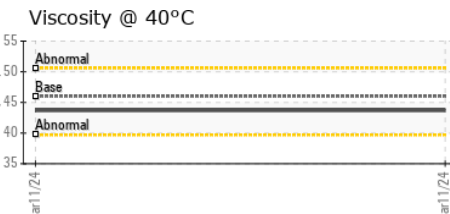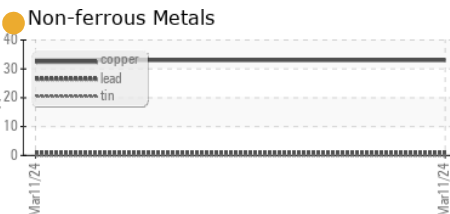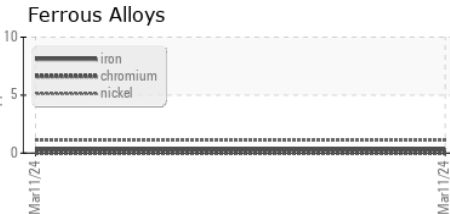

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0914619
Lab Number : **02621470**
Unique Number : 5746589
Test Package : IND 2
Received : 12 Mar 2024
Tested : 13 Mar 2024
Diagnosed : 13 Mar 2024 - Kevin Marson

Amcor Rigid Plastics North America
 245 Britannia Road East
 Mississauga, ON
 CA L4Z 4J3
 Contact: Tino Pennino
 tino.pennino@amcor.com
 T: (905)624-2337
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.