



OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Machine Id
ES0-1
 Component
Main Hydraulic System
 Fluid
{not provided} (--- LTR)

DIAGNOSIS

▲ Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0914587	---	---
Sample Date	Client Info	11 Mar 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >20	1	---	---
Chromium	ppm ASTM D5185(m) >20	0	---	---
Nickel	ppm ASTM D5185(m) >20	<1	---	---
Titanium	ppm ASTM D5185(m)	0	---	---
Silver	ppm ASTM D5185(m)	0	---	---
Aluminum	ppm ASTM D5185(m) >20	<1	---	---
Lead	ppm ASTM D5185(m) >20	<1	---	---
Copper	ppm ASTM D5185(m) >20	7	---	---
Tin	ppm ASTM D5185(m) >20	0	---	---
Antimony	ppm ASTM D5185(m)	0	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	0	---	---
Barium	ppm ASTM D5185(m)	13	---	---
Molybdenum	ppm ASTM D5185(m)	0	---	---
Manganese	ppm ASTM D5185(m)	0	---	---
Magnesium	ppm ASTM D5185(m)	<1	---	---
Calcium	ppm ASTM D5185(m)	8	---	---
Phosphorus	ppm ASTM D5185(m)	518	---	---
Zinc	ppm ASTM D5185(m)	556	---	---
Sulfur	ppm ASTM D5185(m)	1199	---	---
Lithium	ppm ASTM D5185(m)	<1	---	---

CONTAMINANTS





method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<1	---	---
Sodium	ppm ASTM D5185(m)	0	---	---
Potassium	ppm ASTM D5185(m) >20	1	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 10685	---	---
Particles >6µm	ASTM D7647 >1300	▲ 2794	---	---
Particles >14µm	ASTM D7647 >160	138	---	---
Particles >21µm	ASTM D7647 >40	21	---	---
Particles >38µm	ASTM D7647 >10	1	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 21/19/14	---	---



OIL ANALYSIS REPORT

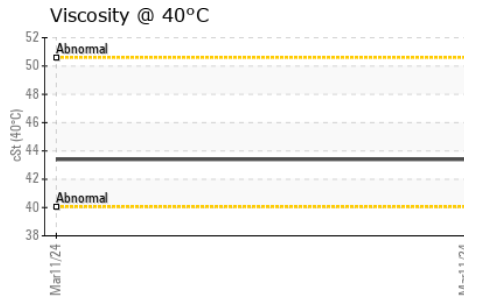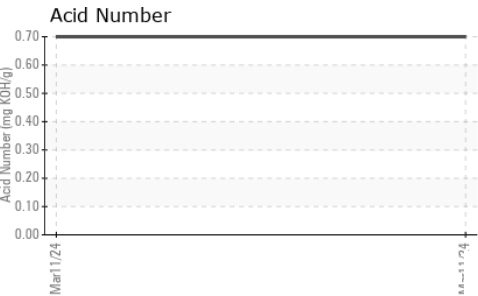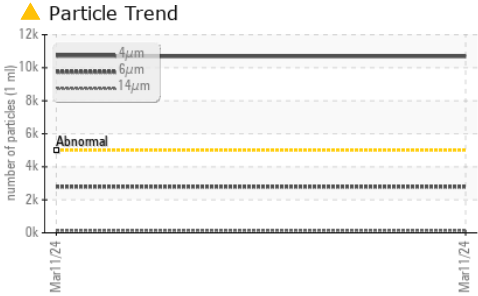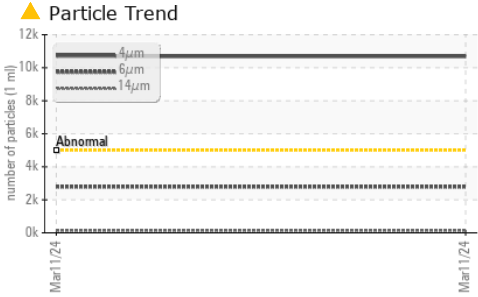

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	---	---





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	43.4	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

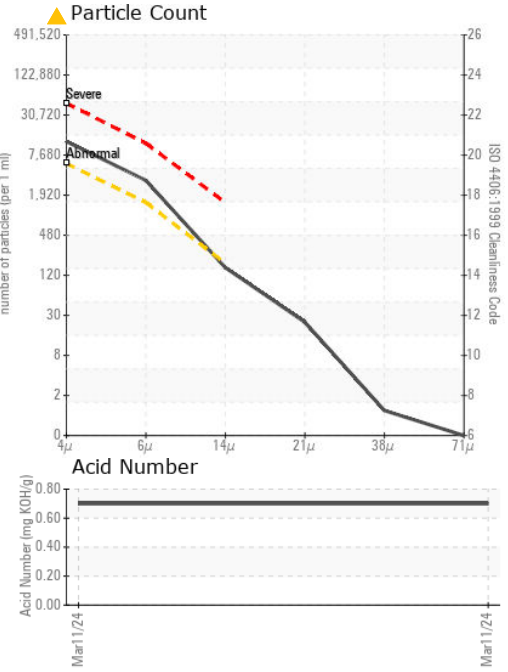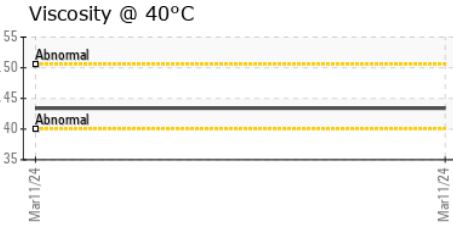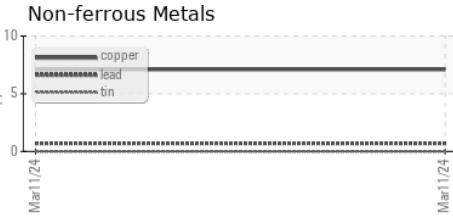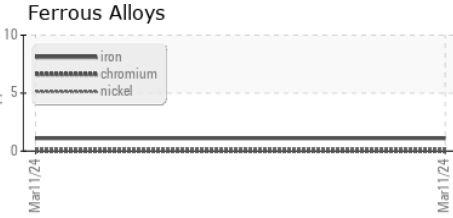

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0914587 **Received** : 12 Mar 2024
Lab Number : **02621489** **Tested** : 13 Mar 2024
Unique Number : 5746608 **Diagnosed** : 13 Mar 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: TAN Man)

Amcor Rigid Plastics North America
 245 Britannia Road East
 Mississauga, ON
 CA L4Z 4J3
 Contact: Tino Pennino
 tino.pennino@amcor.com
 T: (905)624-2337
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.