




COOLANT REPORT

Sample Rating Trend

NORMAL

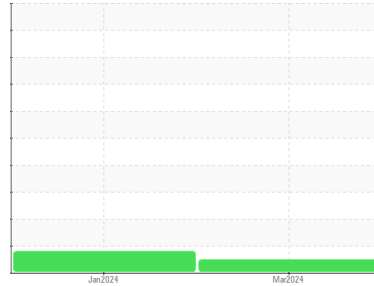

Machine Id
MERCEDES C6-B

Component
Coolant
Fluid
VALVOLINE ZEREX G-05 ANTI-FREEZE (--- GAL)

DIAGNOSIS

Recommendation

The fluid is suitable for further service. Resample at the next service interval to monitor.

Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

Contaminants

There is no indication of any contamination in the coolant.

Coolant Condition

The nitrite level is acceptable. The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0914019	WC0891338	---
Sample Date	Client Info			11 Mar 2024	03 Jan 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

PHYSICAL TEST RESULTS		method	limit/base	current	history1	history2
Glycol Type	FT-IR			UNK	---	---
Specific Gravity	ASTM D1298*	1.060		1.069	1.070	---
pH	Scale 0-14	ASTM D1287*	8.0	7.47	7.22	---
Nitrites	ppm	Alcan Test Kit*		1280	1080	---
Reserve Alkalinity	Scale 0-20	ASTM D1121*	10.0	7.2	6.9	---
Percentage Glycol	%	ASTM D3321*	50	51.9	52.7	---
Freezing Point	°C	ASTM D3321*	-36	-39	-40	---
Carboxylate				---	---	---

CORROSION INHIBITORS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	240	56	48	---
Phosphorus	ppm	ASTM D5185(m)	0	17	12	---
Boron	ppm	ASTM D5185(m)		1653	1626	---
Molybdenum	ppm	ASTM D5185(m)		11	0	---


CORROSION		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>15	0	0	---
Aluminum	ppm	ASTM D5185(m)	>10	1	<1	---
Copper	ppm	ASTM D5185(m)	>10	3	▲ 19	---
Lead	ppm	ASTM D5185(m)	>10	0	0	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Silver	ppm	ASTM D5185(m)	>10	<1	<1	---
Zinc	ppm	ASTM D5185(m)		2	0	---



CARRIER SALTS		method	limit/base	current	history1	history2
Sodium	ppm	ASTM D5185(m)		10455	10195	---
Potassium	ppm	ASTM D5185(m)		243	329	---

SCALE POTENTIAL		method	limit/base	current	history1	history2
Calcium	ppm	ASTM D5185(m)	>100	9	6	---
Magnesium	ppm	ASTM D5185(m)	>40	<1	2	---
Hardness	mg/L CaCO3	In-house*	<75	27	21	---









COOLANT REPORT

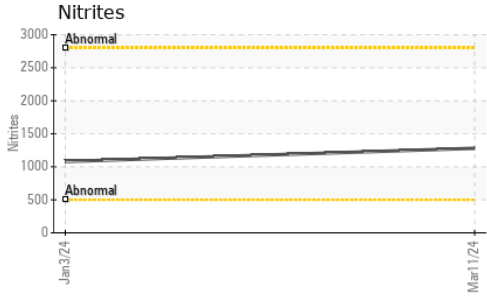

VISUAL	method	limit/base	current	history1	history2
Coolant Color	Visual*	Yello	Grn/Yellow	Green	---
Coolant Appearance	Visual*	Clear	Clear	Clear	---
Color					no image
Bottom					no image

GRAPHS

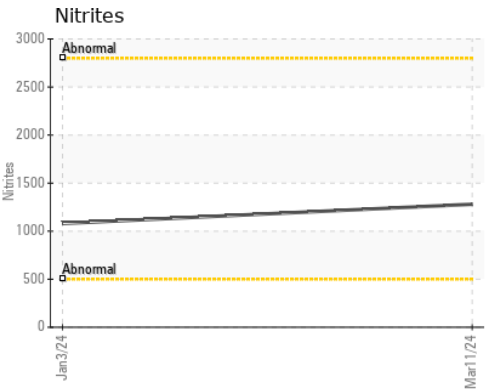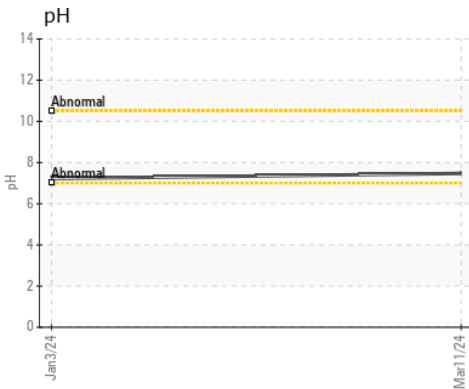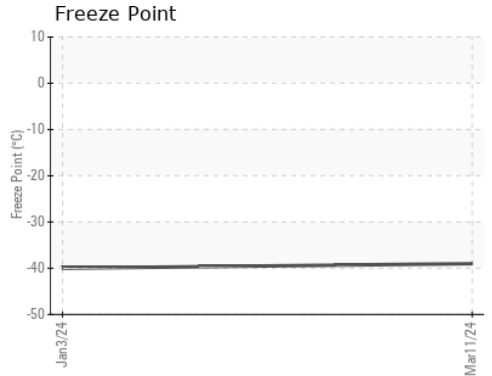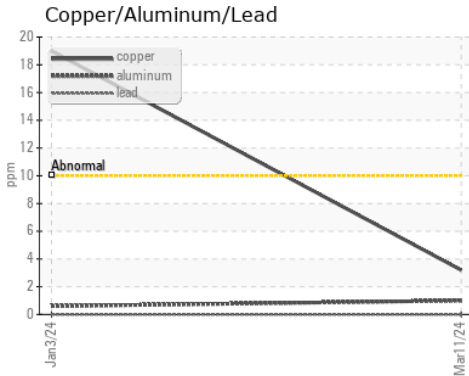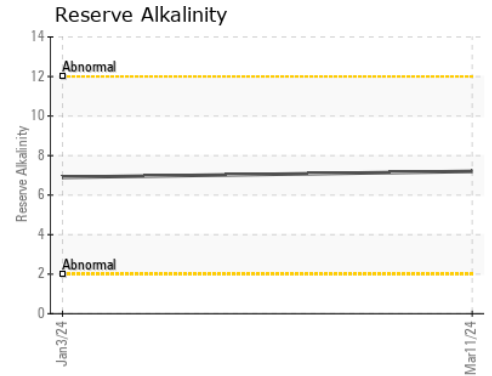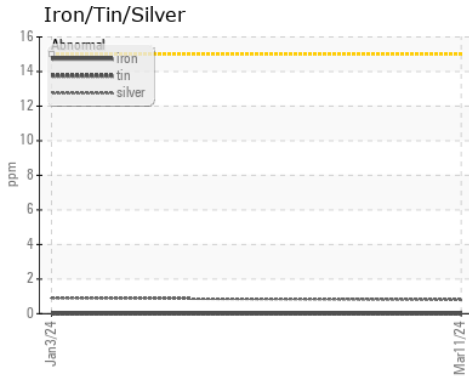

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0914019 **Received** : 12 Mar 2024
Lab Number : **02621611** **Tested** : 12 Mar 2024
Unique Number : 5746730 **Diagnosed** : 13 Mar 2024 - Kevin Marson
Test Package : COOL (Additional Tests: GlycolType)

TransitNext M&R Inc
 3110 Albion Road North
 Ottawa, ON
 CA K1V 9V9
 Contact: Glenn Skilton
 Glenn.Skilton@atkinsrealis.com
 T: (613)907-7100
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.