




# OIL ANALYSIS REPORT

Sample Rating Trend

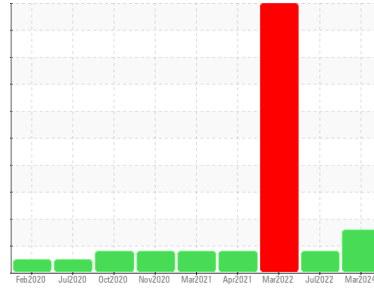

**WEAR**



Area  
**(C-GFNJ)**  
Machine Id  
**[C-GFNJ] AERO VODOCHODY L-39 7082524800026**  
Component  
**Jet Turbine**  
Fluid  
**ANDEROL ROYCO 481 (8 LTR)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. No other corrective action is recommended at this time.

### Wear

Iron ppm levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are marginal.

### Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0867858</b>	WC0611548	WC0669641
Sample Date	Client Info		<b>02 Mar 2024</b>	08 Jul 2022	23 Mar 2022
TSN	hrs	Client Info	<b>1654</b>	1548	1514
TSO	hrs	Client Info	<b>1654</b>	1548	1514
Oil Age	hrs	Client Info	<b>62</b>	34	55
Oil Changed		Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	SEVERE

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	13
Iron	ppm	ASTM D5185(m) >8	<b>▲ 11</b>	▲ 10	▲ 10
Chromium	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >2	<b>1</b>	<1	1
Lead	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m) >3	<b>2</b>	<1	1
Tin	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Calcium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185(m)	<b>20</b>	17	21
Zinc	ppm	ASTM D5185(m)	<b>1</b>	<1	<1
Sulfur	ppm	ASTM D5185(m)	<b>175</b>	194	194
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >8	<b>4</b>	<1	<1
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	0
Water	%	ASTM D6304* >0.1	<b>0.002</b>	0.002	0.002
ppm Water	ppm	ASTM D6304* >1000	<b>17</b>	24.5	20.8


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.01	<b>0.01</b>	0.01	0.01




# OIL ANALYSIS REPORT


## ▲ Ferrous Alloys

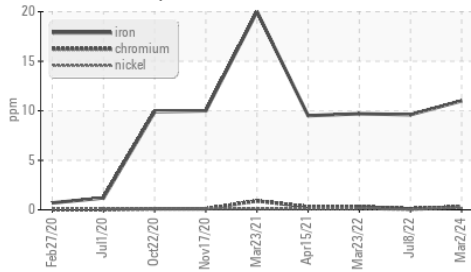


## Acid Number

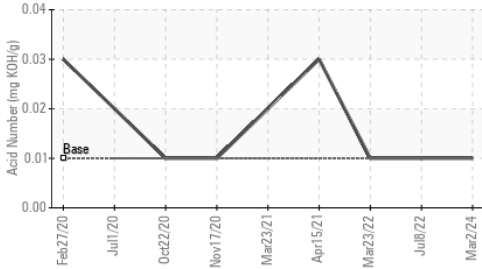


## Water (KF)

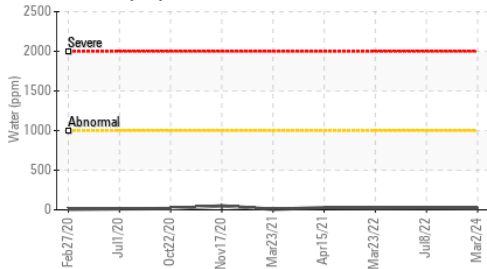

## Viscosity @ 100°C

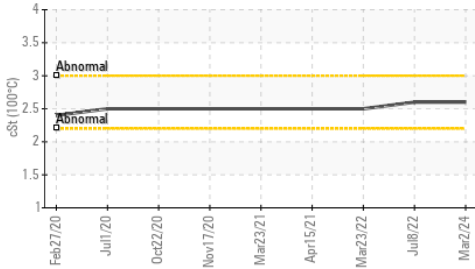

## Viscosity @ 40°C

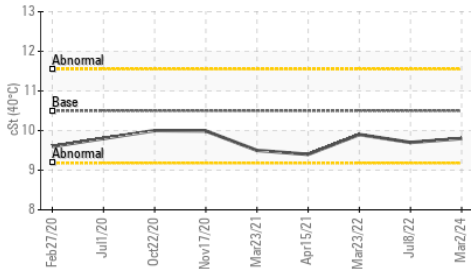

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	▲ LTMOD
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	10.5	9.8	9.7
Visc @ 100°C	cSt	ASTM D7279(m)		2.6	2.6
Viscosity Index (VI)	Scale	ASTM D2270*		94	97

## SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter			no image	no image	



ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0867858 **Received** : 12 Mar 2024  
**Lab Number** : 02621638 **Tested** : 13 Mar 2024  
**Unique Number** : 5746757 **Diagnosed** : 13 Mar 2024 - Kevin Marson  
**Test Package** : AVI 3 ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**ITPS Canada**  
 2465 Aviation Lane., Unit 1  
 London, ON  
 CA N5V 3Z9  
 Contact: Shannon Hickey  
 shannon.hickey@itpscanada.com


T:  
F:



# FERROGRAPHY REPORT

Area  
**(C-GFNJ)**  
 Machine Id  
**[C-GFNJ] AERO VODOCHODY L-39 7082524800026**  
 Component  
**Jet Turbine**  
 Fluid  
**ANDEROL ROYCO 481 (8 LTR)**


Magn: 200x Illum: BC

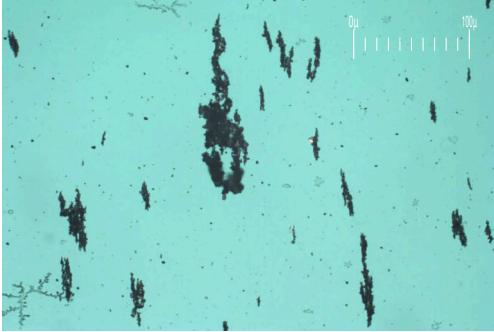

Magn: 50x Illum: RW



Magn: 100x Illum: RW

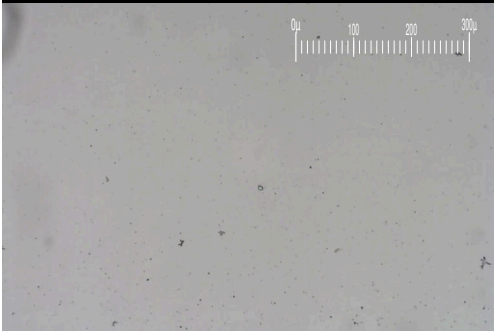


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>7.6</b>	7.5	54.3
Small Particles		DR-Ferr*		<b>6.1</b>	8.3	12.8
Total Particles		DR-Ferr*	>---	<b>13.7</b>	15.8	67.1
Large Particles Percentage	%	DR-Ferr*		<b>10.9</b>	0	61.8
Severity Index		DR-Ferr*		<b>11</b>	6	2253

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<span style="color: orange;">▲</span> <b>3</b>	<span style="color: green;">■</span> 2	<span style="color: green;">■</span> 3
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				<span style="color: red;">▲</span> 1
Ferrous Rolling	Scale 0-10	ASTM D7684*		<span style="color: green;">■</span> <b>1</b>		<span style="color: green;">■</span> 1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<span style="color: green;">■</span> <b>1</b>	<span style="color: green;">■</span> 3	<span style="color: green;">■</span> 1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<span style="color: green;">■</span> <b>1</b>		<span style="color: green;">■</span> 2

### WEAR

Iron ppm levels are abnormal. Wear particle analysis indicates that the ferrous rubbing particles are marginal.

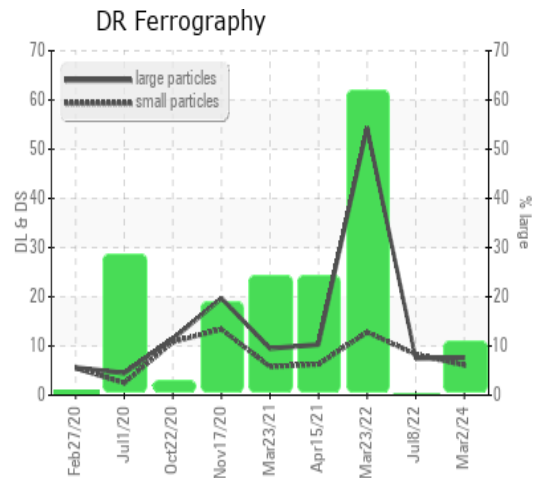

*This page left intentionally blank*