

# **OIL ANALYSIS REPORT**

# Assy F-18/Rig 11 Machine Id DEC 4296

Component

Hydraulic System

LANXESS ROYCO 308CA (--- GAL)

# Mar/224

Sample Rating Trend



### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## Wear

All component wear rates are normal.

## Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Mar2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0920414		
Sample Date		Client Info		12 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	0		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		3		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese						
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm ppm	ASTM D5185(m) ASTM D5185(m)	2	0 7		
-		,	2			
Magnesium	ppm	ASTM D5185(m)	2	7		
Magnesium Calcium	ppm	ASTM D5185(m) ASTM D5185(m)	2	7 1588		
Magnesium Calcium Phosphorus	ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	2	7 1588 72		
Magnesium Calcium Phosphorus Zinc	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		7 1588 72 4		
Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		7 1588 72 4 1418		
Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)		7 1588 72 4 1418 <1		
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT	ppm ppm ppm ppm ppm ppm	ASTM D5185(m)	limit/base	7 1588 72 4 1418 <1	    history1	    history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT Silicon	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  method  ASTM D5185(m)	limit/base	7 1588 72 4 1418 <1 current	    history1	   history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT Silicon Sodium	ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  METHOD  METHOD  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)	limit/base >15	7 1588 72 4 1418 <1 current 2	   history1	   history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT Silicon Sodium Potassium	ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  MEthod  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)	limit/base >15 >20	7 1588 72 4 1418 <1 current 2 2 2	    history1	history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT Silicon Sodium Potassium FLUID CLEANLI	ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  METHOD  ASTM D5185(m)	limit/base >15 >20 limit/base	7 1588 72 4 1418 <1 current 2 2 2	   history1	history2 history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT Silicon Sodium Potassium FLUID CLEANLI Particles >4µm	ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  METHOD  ASTM D5185(m)	limit/base >15 >20 limit/base >5000	7 1588 72 4 1418 <1 current 2 2 2 current 682	history1 history1	history2 history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANT Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm	ppm	ASTM D5185(m)  METHOD  ASTM D5185(m)	limit/base >15 >20 limit/base >5000 >1300	7 1588 72 4 1418 <1 current 2 2 2 current 682 179	history1 history1	history2 history2
Magnesium Calcium Phosphorus Zinc Sulfur Lithium  CONTAMINANT Silicon Sodium Potassium  FLUID CLEANLI Particles >4µm Particles >14µm	ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)  MASTM D5185(m)  METHOD  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D5185(m)  ASTM D7647 ASTM D7647	limit/base >15 >20 limit/base >5000 >1300 >160	7 1588 72 4 1418 <1 current 2 2 2 current 682 179 16	history1 history1	history2 history2

ISO 4406 (c) >19/17/14

Oil Cleanliness



# **OIL ANALYSIS REPORT**

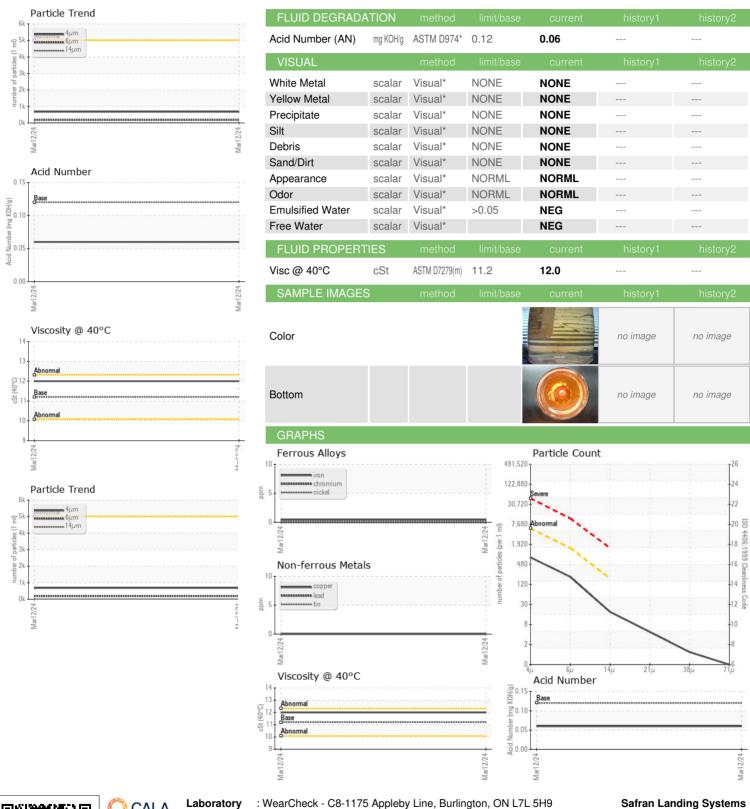



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number

: 02621773 Unique Number : 5746892 Test Package : IND 2

: WC0920414 Received **Tested** 

: 14 Mar 2024 Diagnosed

: 14 Mar 2024 - Wes Davis

: 13 Mar 2024

Contact: Stuart Potter stuart.potter@safrangroup.com T:

F: (905)683-6983

574 Monarch Ave

Ajax, ON

**CA L1S 2G8** 

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.