




# OIL ANALYSIS REPORT

Sample Rating Trend

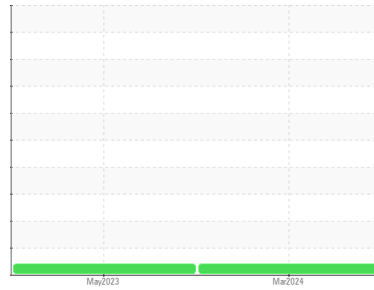

VISCOSITY



Machine Id  
**DWGCWLECAM1010072**

Component  
**Transmission (Auto)**  
Fluid  
**SAE 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### ▲ Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0890798</b>	WC0811279	---
Sample Date	Client Info		<b>01 Mar 2024</b>	04 May 2023	---
Machine Age	hrs	Client Info	<b>4500</b>	1041	---
Oil Age	hrs	Client Info	<b>1500</b>	750	---
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>160	<b>36</b>	17	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>2</b>	1	---
Lead	ppm	ASTM D5185(m)	>50	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>225	<b>3</b>	2	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES



	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>100</b>	62	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>72</b>	17	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)		<b>702</b>	775	---
Calcium	ppm	ASTM D5185(m)		<b>1335</b>	1280	---
Phosphorus	ppm	ASTM D5185(m)		<b>804</b>	970	---
Zinc	ppm	ASTM D5185(m)		<b>884</b>	976	---
Sulfur	ppm	ASTM D5185(m)		<b>3110</b>	2824	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>5</b>	4	---
Sodium	ppm	ASTM D5185(m)	>57	<b>6</b>	13	---
Potassium	ppm	ASTM D5185(m)	>20	<b>12</b>	1	---
Glycol	%	ASTM D7922*		<b>0.0</b>	---	---




# OIL ANALYSIS REPORT

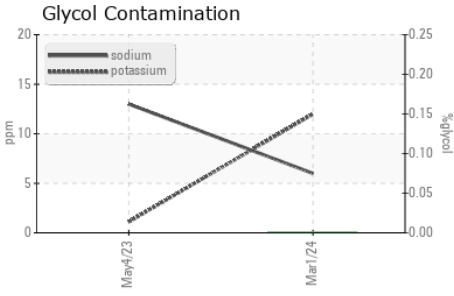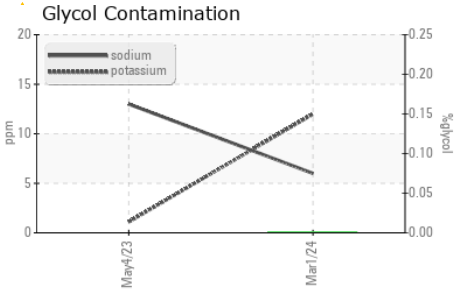









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115 ▲ 68.6	▲ 66.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

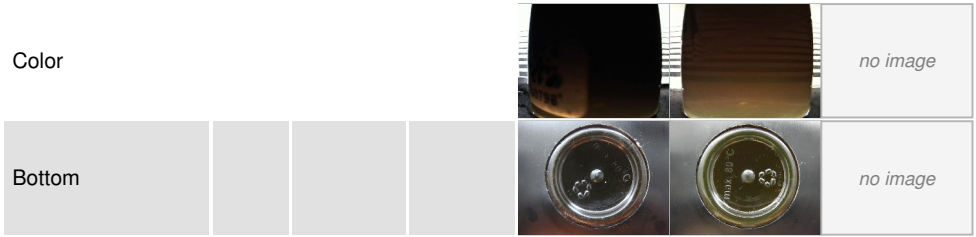

### GRAPHS

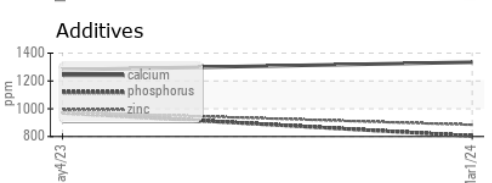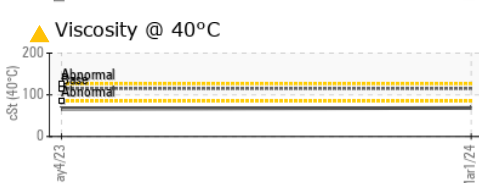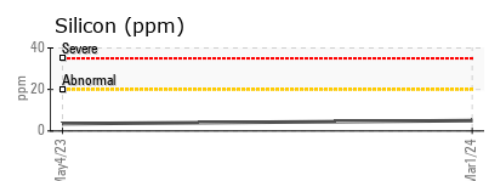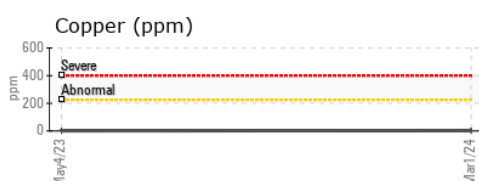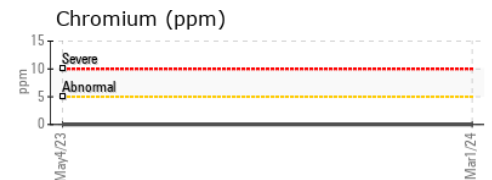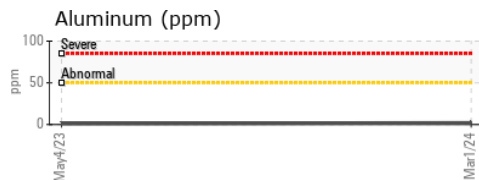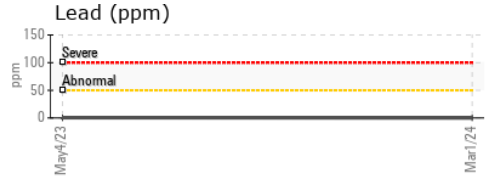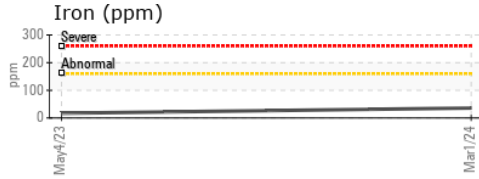

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0890798 **Received** : 13 Mar 2024  
**Lab Number** : 02621817 **Tested** : 14 Mar 2024  
**Unique Number** : 5746936 **Diagnosed** : 15 Mar 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: Glycol )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**C.G. EQUIPMENT**  
 7367 Wellington Rd. 30, Unit A  
 Guelph, ON  
 CA N0M 2T0  
 Contact: Maureen McDonald  
 mmcdonald@cgequipment.com  
 T:  
 F: (519)837-2055