



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**DWGCWLECAM1010072**

Component  
**Front Gearbox**  
Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0890796</b>	---	---
Sample Date	Client Info			<b>11 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>4500</b>	---	---
Oil Age	hrs	Client Info		<b>1500</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	<b>49</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>1</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>20</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>87</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>22</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>2795</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>1172</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>1362</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>7171</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>9</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>5</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---



# OIL ANALYSIS REPORT

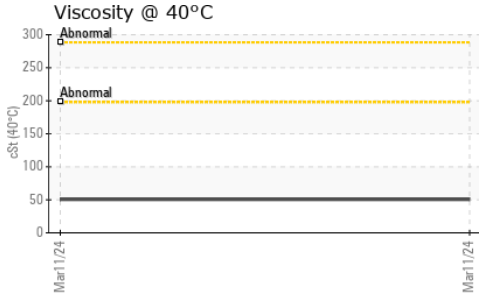


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	50.6	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

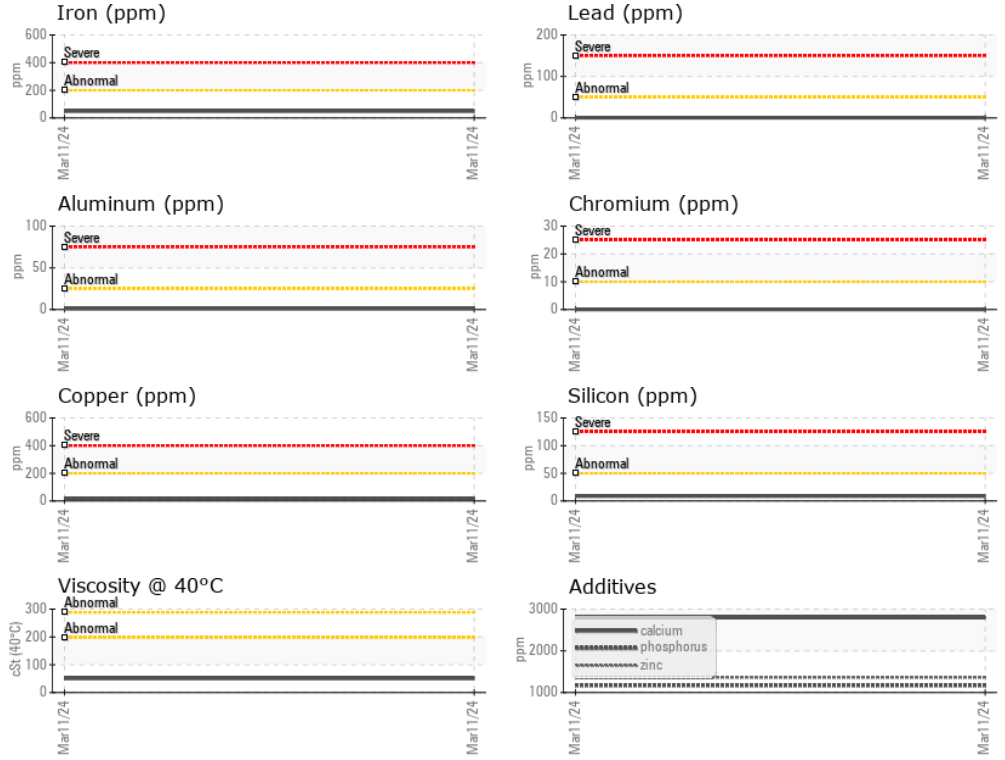

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0890796  
**Lab Number** : 02621823  
**Unique Number** : 5746942  
**Test Package** : MOB 1  
**Received** : 13 Mar 2024  
**Tested** : 13 Mar 2024  
**Diagnosed** : 13 Mar 2024 - Wes Davis

**C.G. EQUIPMENT**  
 7367 Wellington Rd. 30, Unit A  
 Guelph, ON  
 CA N0M 2T0  
 Contact: CG Equipment CG Guelph  
 cory@cgequipment.com  
 T: (519)826-0550  
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.