

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area [1001107564] **AIRBUS N291GX YELLOW**

Component **Hydraulic System** SKYDROL LD-4 (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0912759		
Sample Date		Client Info		12 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	1		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>20	0		
		ASTM D5185(m)	>20	1		
Copper Tin	ppm	ASTM D5185(m) ASTM D5185(m)	>20	0		
	ppm		>10	0		
Antimony	ppm	ASTM D5185(m)		-		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		3		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1		
Barium	ppm	ASTM D5185(m)	0	0		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0	<1		
Calcium	ppm	ASTM D5185(m)	0	18		
Phosphorus	ppm	ASTM D5185(m)	20000	39752		
Zinc	ppm	ASTM D5185(m)	0	3		
Sulfur	ppm	ASTM D5185(m)	1900	1447		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1		
Sodium	ppm	ASTM D5185(m)	-	3		
Potassium	ppm	ASTM D5185(m)	>20	23		
Water	%	ASTM D6304*	>0.6	NEG		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>64000	11047		
Particles 15-25µm	count	NAS 1638	>11400	330		
Particles 25-50µm	count	NAS 1638	>2025	141		
Particles 50-100µm	count	NAS 1638	>360	28		
Particles >100µm	count	NAS 1638	>64	43		
NAS 1638	Class	NAS 1638	>8	8		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	mg KOH/g	ASTM D974*	0.10	0.11		
Acid Number (AN)	niy NOR/9	AG I WI D974	0.10	0.11		

Report Id: KELMOU [WCAMIS] 02621881 (Generated: 03/15/2024 09:03:30) Rev: 1

Contact/Location: Helen Krzywicki - KELMOU



Sever 12000

14000

10000

800

4000

2000

0.5 \$^{0.4}

물0.30

e 0.20

·B 0.10

18

16 Ab

()-0+12

В cSt

Abno

Mar1

1400

1000

800

4000


2000

Mar12/2

Water 600 Mar1

Water 6000

OIL ANALYSIS REPORT

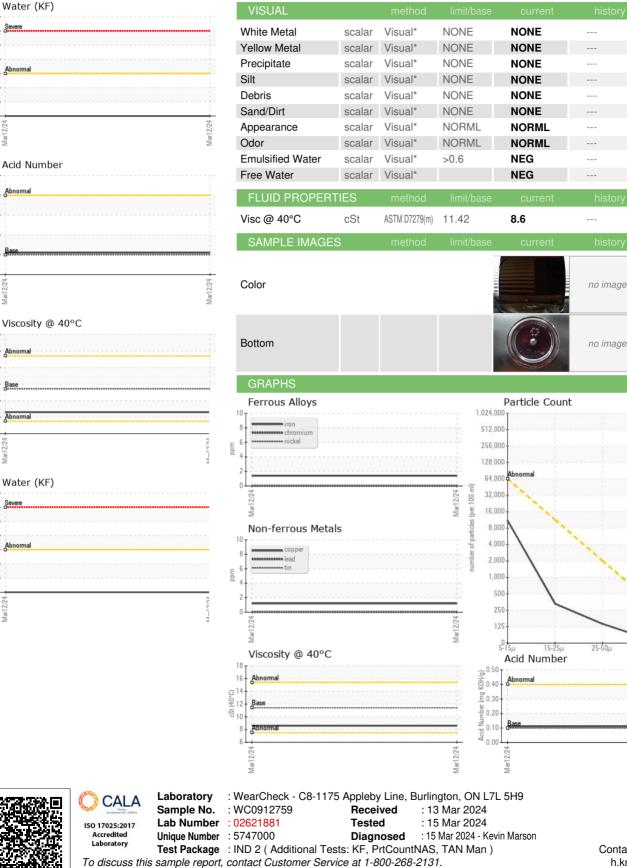

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

KF Aero 9500 Airport Road Mount Hope, ON CA LOR 1W0 Contact: Helen Krzywicki h.krzywicki@kfaero.ca T: (905)679-3313 F: (905)679-4921

Contact/Location: Helen Krzywicki - KELMOU

Mar12/24

no image

no image

NAS

1638 Co