OIL ANALYSIS REPORT

Sample Rating Trend

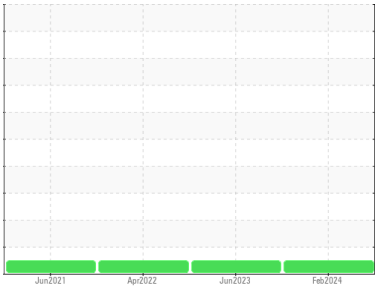

NORMAL

Machine Id
39511 LOWS
Component
Gearbox
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation
Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the component make and model with your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0819609**	WC0577666	WC0577661
Sample Date		Client Info		**29 Feb 2024**	01 Jun 2023	01 Apr 2022
Machine Age	hrs	Client Info		**0**	0	6592
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**Not Changd**	Changed	N/A
Sample Status				**NORMAL**	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	**17**	16	17
Chromium	ppm	ASTM D5185(m)	>15	**<1**	0	<1
Nickel	ppm	ASTM D5185(m)	>15	**<1**	<1	0
Titanium	ppm	ASTM D5185(m)		**0**	0	0
Silver	ppm	ASTM D5185(m)		**0**	0	0
Aluminum	ppm	ASTM D5185(m)	>25	**<1**	<1	<1
Lead	ppm	ASTM D5185(m)	>100	**0**	0	0
Copper	ppm	ASTM D5185(m)	>200	**<1**	2	1
Tin	ppm	ASTM D5185(m)	>25	**0**	0	0
Antimony	ppm	ASTM D5185(m)	>5	**0**	0	0
Vanadium	ppm	ASTM D5185(m)		**0**	0	0
Beryllium	ppm	ASTM D5185(m)		**0**	0	0
Cadmium	ppm	ASTM D5185(m)		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		**18**	<1	<1
Barium	ppm	ASTM D5185(m)		**0**	0	0
Molybdenum	ppm	ASTM D5185(m)		**0**	0	0
Manganese	ppm	ASTM D5185(m)		**0**	<1	0
Magnesium	ppm	ASTM D5185(m)		**1**	3	3
Calcium	ppm	ASTM D5185(m)		**7**	43	42
Phosphorus	ppm	ASTM D5185(m)		**401**	297	280
Zinc	ppm	ASTM D5185(m)		**44**	324	326
Sulfur	ppm	ASTM D5185(m)		**4640**	1285	1138
Lithium	ppm	ASTM D5185(m)		**<1**	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	**13**	31	3
Sodium	ppm	ASTM D5185(m)		**0**	<1	0
Potassium	ppm	ASTM D5185(m)	>20	**<1**	<1	<1

OIL ANALYSIS REPORT

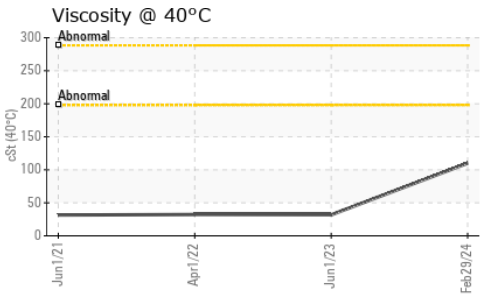

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Precipitate	scalar	Visual*	NONE	**NONE**	NONE	NONE
Silt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Debris	scalar	Visual*	NONE	**NONE**	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Appearance	scalar	Visual*	NORML	**NORML**	NORML	NORML
Odor	scalar	Visual*	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	**NEG**	NEG	NEG
Free Water	scalar	Visual*		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		**110**	31.8	32.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

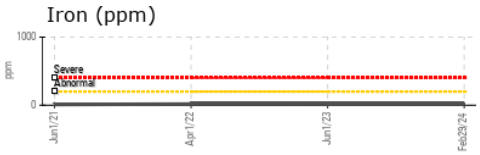

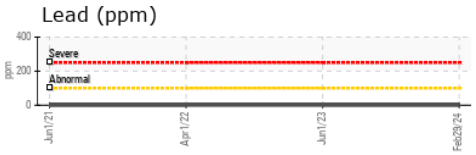

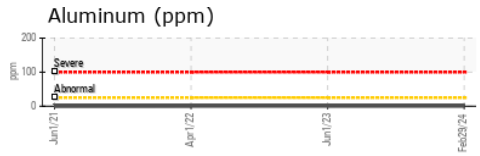

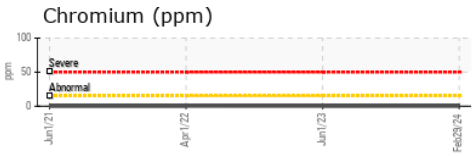

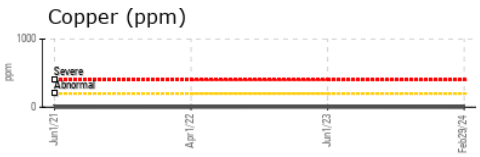

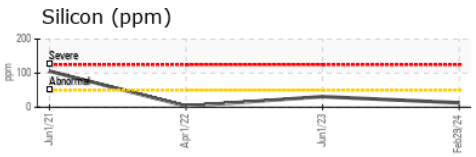

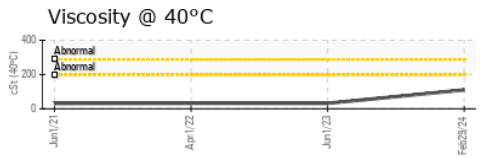

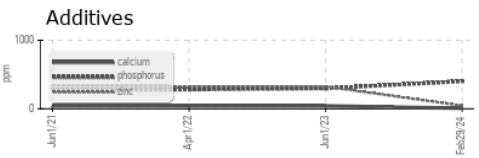

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0819609
Lab Number : 02622070
Unique Number : 5747189
Test Package : MOB 1

Received : 14 Mar 2024
Tested : 14 Mar 2024
Diagnosed : 15 Mar 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

MANSFIELD SKI CLUB
BOX 75
MANSFIELD, ON
CA L0N 1M0
Contact: Scott Dermott
operations@mansfieldskiclub.com
T: (705)380-5431
F: (705)435-6873